
# From Zero to MSCKF

## Lecture Notes on Visual-Inertial Odometry

*Lie theory · error-state Kalman filtering · multi-view geometry · the Multi-State Constraint Kalman Filter*



These notes develop monocular visual-inertial odometry from first principles. They start with the linear algebra, probability and rotation geometry that state estimation is built on, develop calculus on the rotation group SO(3), derive the error-state Kalman filter for an inertial navigation system, build the geometric computer-vision front end, and assemble everything into the Multi-State Constraint Kalman Filter (MSCKF) evaluated on the EuRoC MAV benchmark.

Every convention matches the frozen specification of the `vio` project (`AGENTS.md`): Hamilton quaternions, body-to-world attitude $q_{wb}$, and *local (right) perturbations* in every Jacobian.

**Edition.** This edition *includes* the worked solutions of the project derivation exercises (Appendix E). If you intend to derive $F_c$, $G_c$, $H$ and the cloning Jacobian $J$ yourself (Guardrail 4 of `AGENTS.md`), attempt each *Derivation exercise* box before turning to the appendix, then verify your answer numerically.

Course notes for the `vio` project

Version 1.0 · October 2026

# Preface

## What these notes are

Visual-inertial odometry (VIO) estimates the motion of a rigid body, such as a drone, a phone, a headset or a car, by fusing an inertial measurement unit (IMU) with a camera. It is the navigation core of most modern augmented-reality devices and of many autonomous aerial vehicles. VIO is also one of the best ways to learn state estimation properly, because it forces you to deal with almost every hard topic in the field at once: nonlinear dynamics, estimation on curved spaces, sensor noise modeling, multi-rate fusion, image processing, multi-view geometry, unobservable directions, outliers, numerical conditioning, and real-time computation.

These notes are meant to be the only text you need. They start from vectors and matrices and end with a complete, consistent, real-time multi-state constraint Kalman filter (MSCKF), and every tool used on the way is developed in the notes themselves: when a chapter needs the QR decomposition, the chi-square distribution, the matrix exponential, the inverse function theorem or image interpolation, an earlier chapter has derived it. In a university the same material is spread over a dozen courses; the table below shows which.

The notes are written in the style of a graduate course. Each chapter states its learning objectives, develops the theory with definitions, propositions and proofs, illustrates it with worked examples and figures, flags the pitfalls that cost practitioners weeks of debugging, and closes with key takeaways and exercises, followed on a new page by worked solutions to every exercise (the exercise numbers and the solution numbers link to each other). All formulas and conventions match the `vio` project specification in `AGENTS.md`. Every identity, Jacobian and growth law stated here has been checked numerically, and nothing numerical is left to trust:

- the figures and tables come from the Python scripts in `scripts/` (`make_figures.py`, `make_tables.py` and the planar simulations in `planar_sims.py`), with fixed random seeds, so you can reproduce them and change their parameters;
- every number in the worked solutions is computed by a script in `scripts/solutions/`, one or more per chapter (the C++ experiments of Chapter 30 are in its `cpp/` folder);
- the numerical claims of the later chapters that depend on simulations or on OpenCV are re-derived by the scripts in `scripts/checks/`.

The script `run_all.py` in `scripts/solutions/` runs all of them and stores their output next to them, so you can compare your own numbers with the reference.

## Who should read them

The assumed background is small:

- single-variable calculus (derivatives, integrals, Taylor series) and the idea of a partial derivative;
- matrix arithmetic (products, transposes, solving a small linear system by hand);
- for the implementation notes, the ability to read C++ and Python code.

Everything else, including linear algebra beyond matrix arithmetic, probability, differential equations, Lie groups, Kalman filtering, optimization, image processing and multi-view geometry, is developed from the beginning. Readers who already know some of it can skip ahead; the reading paths below say where.

## The courses inside these notes

| Typical course | Level | Chapters |
|---|---|---|
| Linear algebra | undergraduate | 2 |
| Numerical linear algebra | advanced undergraduate | 3 |
| Differential equations and numerical methods | undergraduate | 4 |
| Probability | undergraduate | 5 |
| Random processes and stochastic systems | graduate | 6 |
| Rigid-body kinematics | undergraduate | 7 |
| Lie groups for robotics | graduate | 8 |
| Estimation and detection theory | graduate | 9, 12, 13 |
| Numerical optimization | graduate | 10 |
| Linear systems and control | advanced undergraduate | 11 |
| Inertial navigation | graduate | 15–17 |
| Image processing | advanced undergraduate | 21 |
| Computer vision and multi-view geometry | graduate | 20, 22, 23 |
| State estimation for robotics, SLAM and VIO | graduate | 14, 18, 19, 24–29 |
| Real-time software engineering | professional | 30 |

## How the notes are organized

**Part I, Mathematical Foundations.** The vocabulary of the whole subject: linear algebra and the factorizations that make filters numerically sound; calculus, differential equations and their numerical solution; probability, Gaussian algebra and random processes; rotations, quaternions, and Lie theory, the calculus of the rotation group.

**Part II, Estimation Theory.** Least squares and Bayesian estimation, nonlinear least squares and optimization on manifolds, linear dynamical systems, the Kalman filter and its nonlinear relatives, and the error-state formulation that makes estimation on a manifold clean.

**Part III, Inertial Navigation.** IMU physics, noise and calibration, strapdown propagation, and the linearized error dynamics that drive covariance growth.

**Part IV, The Error-State Filter in Practice.** Measurement updates, gating, injection and reset, and the statistics that tell you whether the filter is lying to you.

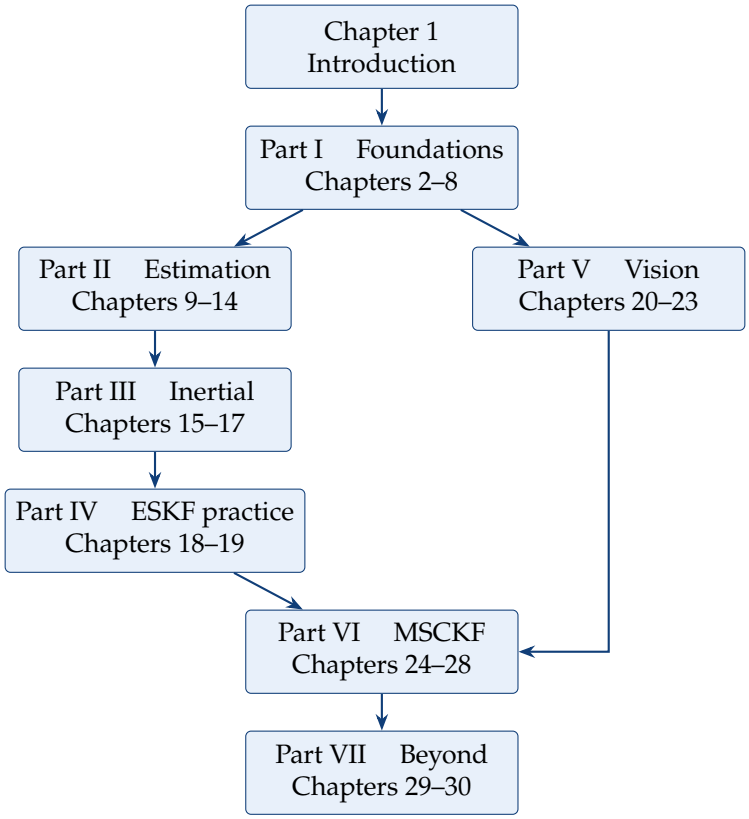



**Figure 1:** The parts of the notes and their dependencies. The inertial branch (Parts II–IV) and the vision branch (Part V) are independent of each other and meet in the MSCKF.

**Part V, Computer Vision.** Camera models and calibration, image processing, corner detection and optical-flow tracking, epipolar geometry, robust estimation, triangulation and bundle adjustment.

**Part VI, The MSCKF.** From EKF-SLAM to the multi-state constraint, stochastic cloning, the visual update with left-nullspace projection, a complete planar MSCKF worked by hand and in simulation, and the full algorithm.

**Part VII, Beyond the Baseline.** Observability and consistency, and engineering a deterministic real-time implementation in C++20.

Table 1 lists the direct prerequisites of every chapter, for readers who want to jump in.

## Reading paths

- **From scratch.** Read in order. Part I is long because it is the foundation of everything else; its chapters can be interleaved with the later ones as they are needed.
- **With an engineering mathematics background** (linear algebra, probability, ODEs). Skim Chapters 2 to 5 for notation and the results marked as theorems, read Chapters 6 to 8 carefully, then continue in order.
- **Knowing Kalman filtering.** Read Chapters 7, 8 and 14, then Parts III–IV, Part V, and Parts VI–VII.

**Table 1:** Direct prerequisites of each chapter (prerequisites of prerequisites are not repeated).

| | Chapter | Needs | | Chapter | Needs |
|---|---|---|---|---|---|
| 1 | Introduction | — | 16 | Strapdown | 4, 8, 15 |
| 2 | Linear algebra | — | 17 | Error dynamics | 11, 14, 16 |
| 3 | Numerical linear algebra | 2 | 18 | Updates | 14, 17 |
| 4 | Calculus and ODEs | 2 | 19 | Consistency | 5, 18 |
| 5 | Probability | 2, 4 | 20 | Image formation | 2, 7 |
| 6 | Random processes | 4, 5 | 21 | Image processing | 4, 20 |
| 7 | Rotations | 2 | 22 | Features and tracking | 10, 21 |
| 8 | Lie theory | 4, 7 | 23 | Multi-view geometry | 3, 10, 20 |
| 9 | Estimation | 3, 5 | 24 | EKF-SLAM to MSCKF | 18, 23 |
| 10 | Nonlinear least squares | 8, 9 | 25 | Cloning | 17, 24 |
| 11 | Linear systems | 3, 4, 6 | 26 | MSCKF update | 23, 25 |
| 12 | Kalman filter | 9, 11 | 27 | Planar MSCKF | 26 |
| 13 | Nonlinear filtering | 12 | 28 | Full algorithm | 22, 26 |
| 14 | Error-state KF | 8, 13 | 29 | Observability | 11, 19, 27 |
| 15 | IMU | 6, 7 | 30 | Engineering | 17–28 (helpful) |

- **Knowing computer vision.** Read Chapters 7 and 8, Parts II–IV, skim Part V, then Parts VI–VII.
- **Driven by the project.** Follow the milestone table below; each milestone lists the chapters it needs, and Table 1 tells you what to read first.

## Reading the boxes

Several kinds of callout recur throughout:

**Key idea: the one-sentence version**

The idea to remember even if you forget the derivation.

**Frozen convention: project specification**

A rule from `AGENTS.md` that is frozen for the whole project. These are never changed silently. A change is a logged design decision.

**Pitfall: what goes wrong in practice**

A mistake that is easy to make, hard to see, and expensive to debug.

**Implementation note: from math to code**

How an equation becomes deterministic, allocation-free C++20 with Eigen.

**Project link: Milestone N**

Where the material meets a project milestone and its exit criteria.

**Worked example: numbers you can check by hand**

A complete calculation with concrete numbers, small enough to redo with pencil and paper.

**Going deeper: optional depth**

Background or extensions that can be skipped on a first reading.

One more box, the **Derivation exercise**, marks the Jacobians that the project asks you to derive yourself: $F_c$, $G_c$, the measurement Jacobians $H$, and the cloning Jacobian $J$. The surrounding text teaches the method on closely related examples (the planar MSCKF of Chapter 27 derives every planar counterpart in full), and the box gives hints plus a finite-difference test that tells you when your answer is right. The worked solutions are collected in an appendix that exists only in the *solutions* edition of these notes (this one: Appendix E). For the same reason, the few end-of-chapter solutions that would give away part of one of these Jacobians are replaced by a short note in the edition without solutions.

## Milestones and chapters

| Milestone | Topic | Chapters |
|---|---|---|
| M1 | Build harness, sanitizers, allocation guard | 30 |
| M2 | Lie group math on SO(3) | 7, 8 (with 2, 4) |
| M3 | EuRoC dataset streamer | 15, Appendix D |
| M4 | Nominal IMU kinematics | 16 (with 4) |
| M5 | Error covariance propagation | 17 (with 6, 11) |
| M6 | Pose update, injection and reset | 14, 18 (with 12) |
| M7 | Telemetry and consistency | 19 |
| M8 | Feature detection and optical flow | 20, 21, 22 |
| M9 | Epipolar geometry and outlier rejection | 23, 22 |
| M10a | Stochastic cloning and sliding window | 24, 25 |
| M10b | MSCKF visual update | 26, 27, 28, 29 |

## Sources and acknowledgments

These notes stand on a body of excellent literature. The treatment of quaternions and the error-state filter follows the conventions of Solà [47]; Lie theory follows Solà, Deray and Atchuthan [48] and Barfoot [4]; the MSCKF is due to Mourikis and Roumeliotis [40] and was refined by Li and Mourikis [34]; the consistency analysis follows Huang, Mourikis and Roumeliotis [28]; much practical wisdom comes from OpenVINS [18] and MSCKF-VIO [51]. The annotated bibliography at the end points to the best places to go deeper on each topic. You should never *need* it to follow these notes; you may well want it once you have.

## This version

Version 1.0 (October 2026) is the first complete release: thirty chapters, the appendices, worked solutions to every exercise, and the scripts that reproduce every number in them. The EuRoC calibration values were checked against the published `sensor.yaml` files, and the statements about OpenCV against the OpenCV 4.x sources and the behavior of OpenCV 5.0. One thing remains for later versions: results on real EuRoC images. They wait until the project reaches the milestones that load the dataset. The bucketing experiment of Exercise 22.6 already runs on `MH_01_easy` once the sequence is in `data/`.

# Contents

**Preface** i

**1 The Visual-Inertial Odometry Problem** 1

1.1 What odometry is . . . 1
1.2 An analogy: the blindfolded walk . . . 1
1.3 The sensors and their weaknesses . . . 2
1.4 Why fusion is hard . . . 4
1.5 A map of the field . . . 5
1.6 Why the MSCKF . . . 5
1.7 The estimator at a glance . . . 6
1.8 The EuRoC benchmark . . . 7
Exercises . . . 8
Solutions to the exercises . . . 9

**I Mathematical Foundations** 11

**2 Vectors, Matrices and Linear Maps** 12

2.1 Vectors . . . 12
2.2 Inner products, lengths and angles . . . 14
2.3 The cross product . . . 15
2.4 Matrices as linear maps . . . 17
2.5 Linear systems, inverses and rank . . . 19
2.6 Determinants . . . 21
2.7 Orthogonal matrices and change of basis . . . 22
2.8 Eigenvalues and eigenvectors . . . 23
2.9 Symmetric matrices and quadratic forms . . . 24
2.10 Trace and norms . . . 26
Exercises . . . 27
Solutions to the exercises . . . 28

**3 Numerical Linear Algebra** **31**

3.1 The cost of matrix operations . . . 31
3.2 Triangular systems and the LU factorization . . . 32
3.3 The Cholesky factorization . . . 32
3.4 Orthogonal factorizations: QR . . . 33
3.5 Least squares . . . 35
3.6 The singular value decomposition . . . 36
3.7 Conditioning and stability . . . 38
3.8 Block matrices and the Schur complement . . . 38
3.9 The matrix exponential . . . 39
3.10 Floating-point arithmetic . . . 40
Exercises . . . 42
Solutions to the exercises . . . 44

**4 Calculus, Differential Equations and Numerical Integration** **47**

4.1 Derivatives of functions of several variables . . . 47
4.2 Ordinary differential equations . . . 49
4.3 Numerical integration of ODEs . . . 51
4.4 Numerical differentiation . . . 53
Exercises . . . 55
Solutions to the exercises . . . 57

**5 Probability and Random Vectors** **60**

5.1 Probability . . . 60
5.2 Random variables . . . 61
5.3 Several random variables . . . 62
5.4 Random vectors . . . 63
5.5 The multivariate Gaussian . . . 64
5.6 Fusing information: Bayes' rule for Gaussians . . . 66
5.7 Limit theorems and Monte Carlo . . . 67
5.8 The chi-squared distribution . . . 68
5.9 Sample statistics and hypothesis tests . . . 69
5.10 Nonlinear transformations . . . 70
Exercises . . . 72
Solutions to the exercises . . . 73

**6 Random Processes, Spectra and Sensor Noise** **75**

6.1 Random sequences . . . 75
6.2 Frequency-domain description . . . 77
6.3 Continuous-time white noise . . . 78
6.4 Sampling and aliasing . . . 78
6.5 Integrated noise . . . 79
6.6 Linear stochastic differential equations . . . 79
6.7 Colored noise and state augmentation . . . 80
6.8 The Allan variance . . . 81
Exercises . . . 82
Solutions to the exercises . . . 84

**7 Rotations, Quaternions and Rigid-Body Kinematics** **86**

7.1 Frames and notation . . . 86
7.2 Rotations in the plane . . . 87
7.3 Rotation matrices and SO(3) . . . 88
7.4 Axis-angle and Rodrigues' formula . . . 88
7.5 Euler angles . . . 89
7.6 Quaternions . . . 90
7.7 Rigid-body transformations . . . 95
7.8 Rotational kinematics . . . 95
Exercises . . . 97
Solutions to the exercises . . . 99

**8 Lie Theory for Rotations** **102**

8.1 Why estimation needs Lie theory . . . 102
8.2 Warm-up: rotations of the plane . . . 103
8.3 Manifolds, groups and Lie groups . . . 103
8.4 The Lie algebra and tangent spaces . . . 104
8.5 The exponential map . . . 105
8.6 The logarithm map . . . 108
8.7 The adjoint: moving a perturbation across a rotation . . . 109
8.8 Composition and the Baker–Campbell–Hausdorff formula . . . 109
8.9 Perturbations, $\boxplus$ and $\boxminus$ . . . 110
8.10 Jacobians on manifolds . . . 111

8.11 Uncertainty on SO(3) . . . 114
8.12 SE(3) and the choice of state manifold . . . 115
8.13 Verifying manifold Jacobians numerically . . . 116
Exercises . . . 117
Solutions to the exercises . . . 118

**II Estimation Theory** **121**

**9 Estimation Fundamentals** **122**
9.1 Estimators and their errors . . . 122
9.2 Linear least squares . . . 123
9.3 Maximum likelihood . . . 124
9.4 Bayesian estimation . . . 125
9.5 Recursive least squares . . . 127
9.6 One answer, many derivations . . . 127
Exercises . . . 128
Solutions to the exercises . . . 129

**10 Nonlinear Least Squares and Optimization** **131**
10.1 The problem . . . 131
10.2 Descent methods . . . 132
10.3 Gauss–Newton . . . 132
10.4 Levenberg–Marquardt . . . 133
10.5 Uncertainty of the solution . . . 133
10.6 Optimization on manifolds . . . 134
10.7 Robust estimation . . . 134
10.8 Structure: poses, landmarks and the Schur complement . . . 136
10.9 Filtering as optimization . . . 137
Exercises . . . 138
Solutions to the exercises . . . 139

**11 Linear Dynamical Systems** **141**
11.1 State-space models . . . 141
11.2 Discretization . . . 142
11.3 Stability . . . 143

11.4 Observability . . . 143
Exercises . . . 145
Solutions to the exercises . . . 147

**12 The Kalman Filter** **149**
12.1 The model . . . 149
12.2 The Bayes filter . . . 149
12.3 Derivation . . . 150
12.4 A worked example by hand . . . 151
12.5 Properties . . . 152
12.6 The Joseph form . . . 152
12.7 Implementing the update . . . 153
12.8 Extensions . . . 154
12.9 A simulated example . . . 154
Exercises . . . 155
Solutions to the exercises . . . 157

**13 Nonlinear Filtering** **159**
13.1 The extended Kalman filter . . . 159
13.2 Sigma-point filters . . . 160
13.3 Particle filters . . . 162
13.4 Why VIO uses the EKF . . . 162
Exercises . . . 163
Solutions to the exercises . . . 164

**14 The Error-State Kalman Filter** **166**
14.1 Filtering on a manifold . . . 166
14.2 The ESKF cycle . . . 167
14.3 Linearized error dynamics: the recipe . . . 168
14.4 Measurement updates on the manifold . . . 168
14.5 Injection and reset . . . 169
14.6 The complete error-state filter . . . 170
14.7 A complete example: attitude estimation . . . 170
Exercises . . . 172
Solutions to the exercises . . . 174

**III Inertial Navigation** **176**

**15 Inertial Sensors and Their Errors** **177**

15.1 How a MEMS accelerometer works . . . 177
15.2 How a MEMS gyroscope works . . . 179
15.3 The measurement model . . . 179
15.4 Calibration . . . 180
15.5 Noise parameters and their units . . . 181
15.6 Tuning in practice . . . 182
15.7 The EuRoC IMU stream . . . 182
Exercises . . . 183
Solutions to the exercises . . . 184

**16 Strapdown Propagation of the Nominal State** **186**

16.1 Continuous-time kinematics . . . 186
16.2 Exact solution for constant inputs . . . 187
16.3 Numerical integration schemes . . . 187
16.4 Coning, sculling and the rotation-vector equation . . . 189
16.5 Timing . . . 190
16.6 Initialization . . . 191
16.7 Sidebar: IMU preintegration . . . 192
Exercises . . . 192
Solutions to the exercises . . . 194

**17 Error-State Dynamics and Covariance Propagation** **196**

17.1 True and nominal systems . . . 196
17.2 Deriving the error dynamics . . . 197
17.3 Discretization . . . 198
17.4 Propagating the full covariance . . . 199
17.5 How uncertainty grows . . . 200
17.6 Validating covariance propagation . . . 201
Exercises . . . 202
Solutions to the exercises . . . 203

**IV The Error-State Filter in Practice** **205**

**18 Measurement Updates, Gating and the Pose Sensor** **206**

18.1 The generic update . . . 206
18.2 Worked example: position with a lever arm . . . 207
18.3 Worked example: a direction sensor . . . 207
18.4 The pose sensor of Milestone 6 . . . 207
18.5 Gating . . . 208
18.6 Pseudo-measurements and timing . . . 209
18.7 Testing the update . . . 210
Exercises . . . 210
Solutions to the exercises . . . 212

**19 Consistency and Evaluation** **214**

19.1 What consistency means . . . 214
19.2 Normalized estimation error squared . . . 214
19.3 Normalized innovation squared . . . 215
19.4 Diagnosing inconsistency . . . 216
19.5 Trajectory accuracy . . . 217
Exercises . . . 218
Solutions to the exercises . . . 220

**V Computer Vision** **222**

**20 Image Formation and Camera Models** **223**

20.1 How a camera forms an image . . . 223
20.2 The pinhole projection . . . 224
20.3 Homogeneous coordinates and projective geometry . . . 225
20.4 Lens distortion . . . 226
20.5 Camera calibration . . . 228
20.6 The measurement model . . . 228
20.7 The projection Jacobian . . . 229
20.8 Extrinsics and time offset . . . 229
Exercises . . . 230
Solutions to the exercises . . . 231

**21 Digital Image Processing** **233**
21.1 Images as functions . . . 233
21.2 Linear filtering . . . 233
21.3 Image derivatives . . . 234
21.4 Sampling, aliasing and pyramids . . . 235
21.5 Interpolation . . . 236
21.6 Finding local maxima . . . 237
21.7 Photometric changes . . . 237
Exercises . . . 238
Solutions to the exercises . . . 239

**22 Feature Detection and Tracking** **241**
22.1 What makes a good feature . . . 241
22.2 Lucas–Kanade optical flow . . . 243
22.3 Making tracking robust . . . 245
22.4 The feature life cycle . . . 246
22.5 Engineering the front end . . . 247
Exercises . . . 248
Solutions to the exercises . . . 249

**23 Multiple-View Geometry** **252**
23.1 Epipolar geometry . . . 252
23.2 Estimating relative motion . . . 253
23.3 Homographies between views . . . 255
23.4 RANSAC . . . 255
23.5 Degeneracies . . . 256
23.6 Triangulation . . . 257
23.7 Bundle adjustment . . . 259
Exercises . . . 260
Solutions to the exercises . . . 262

**VI The Multi-State Constraint Kalman Filter** **265**

**24 From EKF-SLAM to the MSCKF** **266**
24.1 EKF-SLAM . . . 266

24.2 The multi-state constraint . . . 267
24.3 Why past poses must be in the state . . . 267
24.4 The MSCKF state . . . 268
24.5 Relation to sliding-window optimization . . . 268
24.6 Variants . . . 269
Exercises . . . 269
Solutions to the exercises . . . 270

**25 Stochastic Cloning and the Sliding Window** **271**
25.1 A scalar example . . . 271
25.2 State augmentation . . . 272
25.3 The project's clone . . . 272
25.4 Clones in propagation and updates . . . 273
25.5 Marginalizing the oldest clone . . . 273
25.6 Window policy and size . . . 274
Exercises . . . 274
Solutions to the exercises . . . 276

**26 The MSCKF Visual Update** **278**
26.1 A feature track . . . 278
26.2 Residuals and Jacobians . . . 278
26.3 The problem with the feature . . . 279
26.4 Left-nullspace projection . . . 280
26.5 Gating, stacking and compression . . . 282
26.6 The update . . . 282
Exercises . . . 283
Solutions to the exercises . . . 285

**27 A Complete MSCKF in the Plane** **287**
27.1 The planar world . . . 287
27.2 Sensors . . . 288
27.3 State, error state and propagation . . . 289
27.4 Cloning and marginalization . . . 291
27.5 The feature measurement . . . 291
27.6 Eliminating the feature . . . 293

27.7 The complete filter . . . 294
27.8 Simulation results . . . 295
27.9 The unobservable directions . . . 297
27.10 From the plane to three dimensions . . . 298
Exercises . . . 299
Solutions to the exercises . . . 300

**28 The Complete Algorithm** **303**
28.1 The event loop . . . 303
28.2 Initialization and the first seconds . . . 303
28.3 Computational budget . . . 304
28.4 Software architecture . . . 305
28.5 Debugging guide . . . 305
28.6 What to expect on EuRoC . . . 306
Exercises . . . 307
Solutions to the exercises . . . 308

**VII Beyond the Baseline** **310**

**29 Observability and Consistency of VIO** **311**
29.1 Observability . . . 311
29.2 The four unobservable directions of VIO . . . 313
29.3 Why the standard EKF becomes overconfident . . . 314
29.4 First-Estimates Jacobians . . . 316
29.5 Other remedies . . . 318
29.6 Degenerate motions . . . 320
Exercises . . . 321
Solutions to the exercises . . . 322

**30 Engineering a Real-Time Estimator in C++20** **325**
30.1 C++ essentials for estimator code . . . 325
30.2 Determinism and the memory tiers . . . 326
30.3 Eigen in brief . . . 327
30.4 Eigen pitfalls . . . 329
30.5 Time and events . . . 330

30.6 Numerical robustness checklist . . . 330
30.7 Sanitizers . . . 330
30.8 Modern CMake in brief . . . 331
30.9 Testing . . . 332
30.10 Debugging a diverging filter . . . 332
30.11 Going further . . . 333
Exercises . . . 333
Solutions to the exercises . . . 335

**Appendices** **338**

**A Notation and Conventions** **339**

**B Formula Sheet** **341**

**C Statistical and Numerical Tables** **346**

**D The EuRoC MAV Dataset** **348**

**E Solutions to the Project Derivation Exercises** **350**
E.1 Error-state dynamics $F_c$ and $G_c$ . . . 350
E.2 Closed-form blocks of $\Phi$ . . . 351
E.3 Pose measurement Jacobian . . . 351
E.4 Cloning Jacobian . . . 352
E.5 Visual measurement Jacobians . . . 352

**Further Reading** **354**

**References** **355**

**Index** **359**

Chapter 1

# The Visual-Inertial Odometry Problem

**In this chapter**

- State precisely what visual-inertial odometry estimates and what it cannot estimate.
- Understand why an IMU alone drifts, and quantify how fast.
- Understand why a monocular camera alone cannot recover metric scale.
- Place the MSCKF among the main families of VIO algorithms.
- See the complete estimator pipeline that the rest of the notes build piece by piece.

## 1.1 What odometry is

*Odometry* is the incremental estimation of a body's motion from its own sensors, without a prior map and without absolute positioning such as GNSS. The word comes from the wheel odometers of cars, which count wheel rotations. *Visual-inertial odometry* uses an IMU and one or more cameras rigidly attached to the body.

At every time $t$ we want the *state*

$$x(t) = \big( p_{wb}(t),\ v_{wb}(t),\ q_{wb}(t),\ b_a(t),\ b_g(t) \big), \tag{1.1}$$

namely the position and velocity of the body in a world frame, its orientation, and the slowly varying biases of the accelerometer and gyroscope. We also want an honest measure of how uncertain that estimate is. Chapter 7 makes the frames and symbols precise. For now, $w$ is a fixed, gravity-aligned world frame and $b$ is the body frame of the IMU.

Odometry differs from *SLAM* (simultaneous localization and mapping) in one important way. A SLAM system builds a persistent map and recognizes places it has seen before (*loop closure*), which lets it cancel accumulated drift. An odometry system has no such memory: its error grows without bound, slowly if it is good and quickly if it is bad. The goal of VIO is to make that growth as slow as possible, typically well below 1% of the distance traveled, while running in real time on modest hardware.

## 1.2 An analogy: the blindfolded walk

Imagine standing blindfolded in an unfamiliar gymnasium and being asked to walk a 20-meter square and return to the start. You would rely on your inner ear to sense turning and on the feeling in your legs to judge distance. Integrating these internal sensations into a running estimate of your position is *dead reckoning*.

For the first few steps the estimate is good. But your sensors are imperfect: a 90-degree turn comes out as 87 degrees, and your strides are a little shorter than you think. Each new step is added on top of a slightly wrong estimate, so the small errors accumulate. After a few minutes you might believe you are back at the start while actually standing several meters away. This accumulation is called *drift*.

Now suppose you may lift the blindfold for a tenth of a second every few seconds. The room is dark except for a few glowing stickers on the walls. You do not know where the stickers are, but by watching how they shift between glimpses you can infer how you moved, and correct the walking estimate. That is visual-inertial odometry: the inner ear is the IMU, the glimpses are camera images, and the stickers are visual features.

Two details of the analogy carry over exactly. First, the glimpses are *relative*: they tell you how you moved between glimpses, not where you are in some absolute sense, so drift is slowed but never eliminated. Second, you need both senses. Without the glimpses, drift is fast. Without the inner ear, a single glimpse cannot tell whether a sticker is small and near or large and far.

## 1.3 The sensors and their weaknesses

### 1.3.1 The inertial measurement unit

An IMU contains a three-axis gyroscope and a three-axis accelerometer. Neither measures position.

- The **gyroscope** measures the angular velocity $\omega$ of the body, in rad/s, expressed in the body frame.
- The **accelerometer** measures *specific force*: the non-gravitational force per unit mass acting on the sensor. At rest on a table it reads +9.81 m/s$^2$ *upward*, because the table pushes up on it, and in free fall it reads zero. Chapter 15 explains this carefully.

IMUs are fast (typically 100–1000 Hz), cheap, self-contained, insensitive to lighting and texture, and their measurements are *metric*: an acceleration in m/s$^2$ carries an absolute scale. But to get position you must integrate angular rate once to get attitude, then rotate the specific force into the world frame, add gravity, and integrate twice. Any error in the sensor or in the attitude is integrated as well.

### 1.3.2 How fast inertial errors grow

Three error sources dominate short-term inertial drift. The derivations are one-liners, and the resulting growth laws (Figure 1.1) are worth memorizing.

1. **Accelerometer bias $b_a$.** A constant acceleration error integrated twice gives a position error $\frac{1}{2} b_a t^2$.
2. **Initial tilt error $\delta\theta_0$.** If the estimated attitude is tilted by a small angle $\delta\theta_0$, the 9.81 m/s$^2$ gravity compensation is applied along a slightly wrong axis. A component $g\,\delta\theta_0$ of gravity leaks into the horizontal acceleration, and the position error grows as $\frac{1}{2} g\,\delta\theta_0\,t^2$.

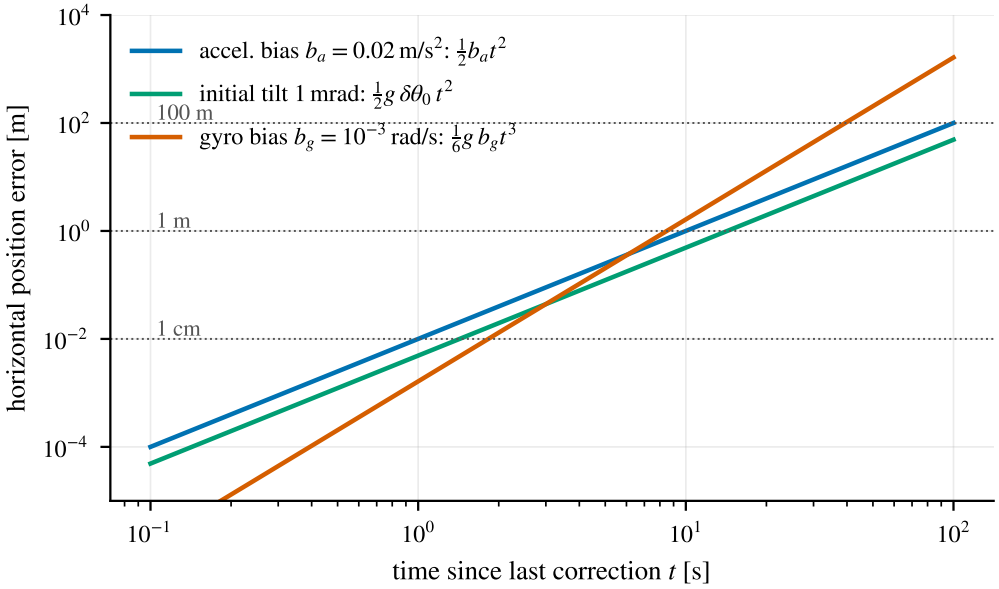



**Figure 1.1:** Deterministic dead-reckoning drift from three error sources of a consumer-grade IMU. A gyro bias of $10^{-3}$ rad/s ($\approx 0.06\,^\circ$/s) produces more than a meter of error after ten seconds and hundreds of meters after one minute. The cubic law is why attitude accuracy dominates inertial navigation.

3. **Gyroscope bias $b_g$.** Now the tilt itself grows linearly, $\delta\theta(t) = b_g t$, so the leaked acceleration is $g b_g t$, and integrating twice gives $\frac{1}{6} g\, b_g t^3$.

With $b_g = 10^{-3}$ rad/s, a modest value for a MEMS gyroscope, the gyro term alone gives 1.6 m after 10 s and 353 m after 60 s. Random sensor noise adds error that grows in a similar way. Chapter 17 derives that the position *standard deviation* due to accelerometer white noise grows as $t^{3/2}$, due to gyroscope white noise as $t^{5/2}$, and due to the gyroscope bias random walk as $t^{7/2}$.

**Key idea: inertial navigation is an attitude problem**

Because gravity is large (about 9.81 m/s$^2$) compared with typical accelerometer errors, a tilt of one milliradian costs as much as an accelerometer bias of about 10 mm/s$^2$. Position accuracy is therefore limited mostly by attitude accuracy. Any aiding sensor that constrains roll and pitch, as a camera does, pays off enormously.

### 1.3.3 The camera

A camera measures the *directions* (bearings) of light rays arriving from the scene. A point $p_f$ in the world appears in the image at the projection of its camera-frame coordinates $p_c = (X_c, Y_c, Z_c)$:

$$z = \begin{bmatrix} X_c / Z_c \\ Y_c / Z_c \end{bmatrix}. \tag{1.2}$$

Because images are measurements of fixed scene geometry, they do not drift the way integrated inertial data does. But a single camera has a fundamental blind spot.

| | IMU | Monocular camera |
|---|---|---|
| Rate | 100–1000 Hz | 10–60 Hz |
| Measures | angular rate, specific force | bearings to scene points |
| Scale | metric | unknown (Proposition 1.1) |
| Drift | fast ($t^2$ to $t^3$) | slow, relative to the scene |
| Gravity direction | observable (at rest or on average) | not observable |
| Fails when | always drifts; saturates on impacts | blur, darkness, no texture, pure rotation |

**Table 1.1:** The IMU and the camera fail in complementary ways.

**Proposition 1.1** (Monocular scale ambiguity). *Let a camera with poses $(R_i, p_i)$, $i = 1, \dots, M$, observe points $p_{f,j}$. For any $s > 0$, the scaled configuration with poses $(R_i, s\,p_i)$ and points $s\,p_{f,j}$ produces exactly the same images.*

*Proof.* In camera $i$, the scaled point has coordinates $R_i^\mathsf{T}(s\,p_{f,j} - s\,p_i) = s\,R_i^\mathsf{T}(p_{f,j} - p_i)$. The projection divides the first two coordinates by the third, so the factor $s$ cancels. ∎

A camera alone therefore recovers the trajectory and the scene only up to an unknown global scale. A photograph of a toy car from 10 cm can be identical to a photograph of a real car from 4 m. Cameras also fail under motion blur, in darkness, against texture-less surfaces such as white walls, and in scenes dominated by moving objects.

### 1.3.4 Why the combination works

Table 1.1 summarizes the complementarity. The camera bounds the inertial drift by constraining the motion between images. The IMU supplies metric scale, the direction of gravity (and hence absolute roll and pitch), high-rate motion between frames, and robustness during brief visual outages. Scale becomes observable because the accelerometer measures acceleration in $\mathrm{m/s^2}$: scaling a trajectory by $s$ scales its acceleration by $s$, which the accelerometer would notice. The exception is unaccelerated motion. At constant velocity, the scale is unobservable again, which is one of several *degenerate motions* studied in Chapter 29.

Even fused, four directions remain unobservable: the three components of global position, and the rotation about the gravity vector (global yaw). Neither sensor senses where the origin is or which way north is. VIO estimates these relative to the starting pose, and they drift.

## 1.4 Why fusion is hard

The difficulty of VIO comes from several sources acting at once.

1. **Nonlinearity.** Rotations enter the equations through products and trigonometric functions, and the camera projection divides by depth.
2. **Curved state spaces.** Orientations do not live in a vector space. You cannot add two rotations, and every estimator must deal with this (Chapter 8).

3. **Multi-rate, asynchronous data.** The IMU runs at 200 Hz and the camera at 20 Hz, and every measurement must be processed in timestamp order.
4. **Unknown scene.** The 3D positions of the visual features are unknown and must be estimated, or eliminated, along with the motion.
5. **Outliers.** Feature tracks fail, latch onto moving objects, or slide along edges.
6. **Unobservability.** Some directions of the state cannot be determined. A careless estimator can become falsely confident about them, which is the consistency problem of Chapter 29.
7. **Real time.** All of this must run at camera rate, deterministically, on embedded processors.

## 1.5 A map of the field

VIO algorithms differ along three main axes.

**Loosely vs. tightly coupled.** A loosely coupled system runs a vision-only pipeline that produces up-to-scale poses and fuses those poses with the IMU. A tightly coupled system feeds the raw visual measurements (feature positions in the image) directly into a single estimator together with the inertial data. Tight coupling is more accurate and more robust, because the IMU helps the vision part and correlations are handled correctly. All modern high-accuracy systems, and this project, are tightly coupled.

**Filtering vs. optimization.** *Filtering* approaches (EKF-based) process each measurement once, keep a Gaussian belief over a bounded state, and discard the past. They are fast and have predictable cost. *Optimization* approaches solve a nonlinear least-squares problem over a sliding window of recent states, relinearizing as needed, and summarize discarded states as a prior (marginalization). They are typically more accurate per frame but more expensive and more complex. The two families are closer than they appear: the MSCKF is equivalent to a single Gauss–Newton iteration over a sliding window of poses with the landmarks marginalized (Chapter 26).

**Feature-based vs. direct.** Feature-based systems extract and track sparse keypoints and use their image coordinates as measurements. Direct systems use pixel intensities themselves (photometric error).

## 1.6 Why the MSCKF

In EKF-SLAM every tracked landmark adds three variables to the state. Covariance updates cost $O(n^2)$ to $O(n^3)$ in the state size $n$, so a few hundred landmarks quickly exhaust a real-time budget, and landmark initialization from a single camera is awkward because depth is unknown at first sight.

| System | Family | Notes |
|---|---|---|
| EKF-SLAM / MonoSLAM [11] | filter, landmarks in state | cost grows quadratically with landmarks |
| MSCKF [40, 34] | filter, poses in state | landmarks eliminated by nullspace projection; this project |
| MSCKF-VIO [51] | filter (stereo MSCKF) | open-source, fast flight; good engineering reference |
| OpenVINS [18] | filter (MSCKF + SLAM features) | research platform with excellent documentation |
| ROVIO [6] | filter, direct | photometric patches in an iterated EKF |
| OKVIS [33] | optimization, keyframes | sliding-window bundle adjustment |
| VINS-Mono [42] | optimization | preintegration, robust initialization, loop closure |
| ORB-SLAM3 [9] | optimization + map | full visual-inertial SLAM with relocalization |

**Table 1.2:** Representative visual-inertial estimators.

The **Multi-State Constraint Kalman Filter** of Mourikis and Roumeliotis [40] keeps instead a sliding window of past IMU poses, called *clones*, taken at image times. When a feature has been tracked across several clones, its observations constrain those poses relative to one another. The feature's 3D position is triangulated temporarily, then algebraically eliminated from the linearized equations by projecting onto the left nullspace of its Jacobian (Chapter 26). The landmark never enters the state. The result:

- cost linear in the number of features and bounded by the window size;
- no need to initialize landmark depth inside the filter;
- all the geometric information of each feature track is used exactly once.

These properties make the MSCKF the canonical filter-based VIO and an excellent vehicle for learning, because it requires every ingredient of the field to be understood and nothing more.

## 1.7 The estimator at a glance

Figure 1.2 shows the whole estimator. Between images, each IMU sample advances the nominal state with the nonlinear kinematics and grows the error covariance. When an image arrives, the filter propagates exactly to the image timestamp, appends a clone of the current pose, and updates the feature tracks. Tracks that have ended, or whose oldest observation is about to leave the window, are triangulated and converted into constraints between clones. The update corrects the IMU state and all clones together, the correction is injected into the nominal state, and the oldest clone is removed when the window is full. Chapter 27 builds a complete miniature of this pipeline for a robot moving in a plane, small enough to derive by hand and to run as a short Python script; it is the place to look whenever the general chapters feel abstract.

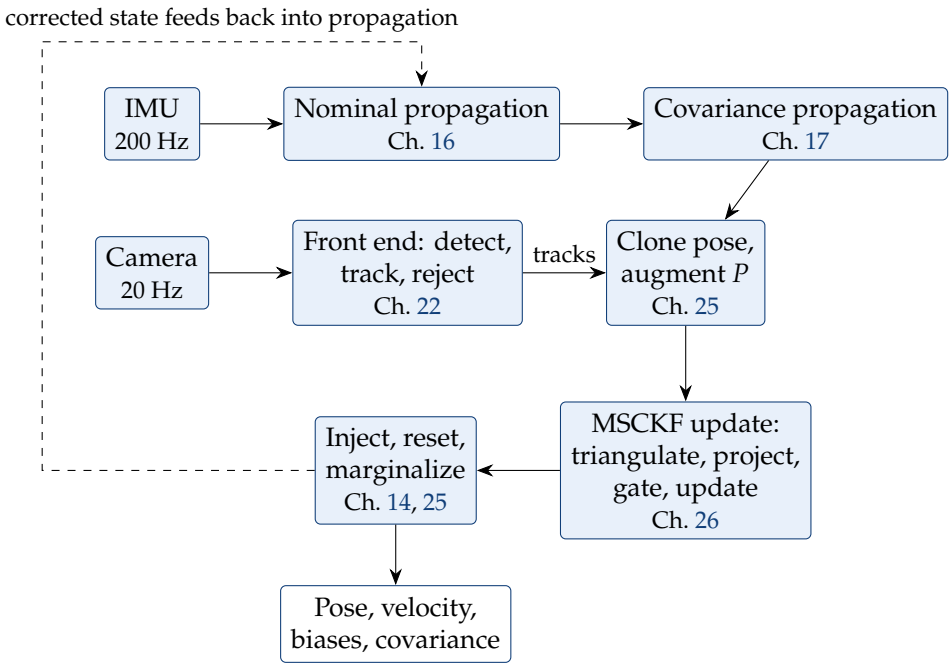



**Figure 1.2:** Data flow of the monocular MSCKF built in these notes.

**Project link: the road map**

The project builds this pipeline from the bottom up: the Lie group toolkit (M2), the data stream (M3), inertial propagation (M4–M5), a filter tested against synthetic pose measurements (M6–M7), the visual front end (M8–M9), and finally the MSCKF (M10a–M10b). Each layer is tested in isolation before the next is added, so that any later failure can be localized.

## 1.8 The EuRoC benchmark

The European Robotics Challenge (EuRoC) MAV dataset [8] is the standard VIO benchmark. A hexacopter carries a stereo pair of global-shutter cameras ($752 \times 480$, 20 Hz) and an ADIS16448 MEMS IMU (200 Hz), hardware-synchronized and calibrated. Eleven sequences fly through an industrial machine hall (MH_01 to MH_05) and a motion-capture room (V1_01 to V2_03), graded easy, medium and difficult by speed, lighting and texture. Ground truth comes from a laser tracker or a motion-capture system. Appendix D documents the file formats and calibration values the project uses.

**Key takeaways**

- VIO estimates pose, velocity and IMU biases from an IMU and a camera, with no map and no absolute positioning, and its error grows without bound.
- Inertial drift is dominated by attitude error: a gyro bias produces position error growing like $t^3$.
- A monocular camera observes the scene only up to scale. The accelerometer supplies the scale, provided the body accelerates.

- Global position and yaw remain unobservable even with both sensors.
- The MSCKF keeps a sliding window of past poses rather than landmarks, which bounds its cost while using every feature track.

## Exercises

**1.1** A MEMS accelerometer has a bias of 5 mg ($1\,\text{mg} = 9.81 \times 10^{-3}\ \text{m/s}^2$). How long can you dead-reckon before the position error exceeds 1 m? What gyro bias produces the same error at the same time?

**1.2** Prove that the gravity leak produced by a constant tilt error $\delta\theta_0$ is $g\,\delta\theta_0$ to first order. What is the exact expression, and at what tilt does the first-order formula err by 1%?

**1.3** Extend Proposition 1.1: show that applying a common rigid transformation $(R, t)$ to all camera poses and points also leaves the images unchanged. How many unobservable degrees of freedom does a monocular camera have? Which of them does an IMU remove, and why?

**1.4** A drone hovers perfectly still for 30 s. Which states can a VIO system estimate during that time, and which cannot be distinguished from each other? (Revisit this after Chapter 29.)

**1.5** Read the abstract and introduction of [40]. In two sentences, state the problem with EKF-SLAM that the paper claims to solve, and the key idea of the solution.

## Solutions to the exercises

**1.1** With $b_a = 5$ mg $= 4.905 \times 10^{-2}$ m/s$^2$, the position error $\frac{1}{2} b_a t^2$ reaches 1 m at

$$t = \sqrt{2/b_a} = 6.39 \text{ s}.$$

A gyro bias produces $\frac{1}{6} g b_g t^3$, which equals 1 m at the same time when $b_g = 6/(gt^3) = 3b_a/(gt) = 2.35 \times 10^{-3}$ rad/s, about 0.13 °/s or 480 °/h. The gyro term grows like $t^3$ and the accelerometer term like $t^2$, so for longer flights the gyro dominates: a typical MEMS gyro bias of $10^{-3}$ rad/s overtakes the 5 mg accelerometer bias after $t = 3b_a/(gb_g) = 15$ s.

**1.2** Let the vehicle be level and at rest, and let the estimate be tilted by $\delta\theta_0$ about the $x$-axis, $\hat{R} = R_x(\delta\theta_0)$. The accelerometer measures the specific force $f = (0, 0, g)$, and the navigation equations compute the acceleration

$$\hat{R} f + g_w = \big(0,\ -g \sin\delta\theta_0,\ g\cos\delta\theta_0\big) + (0, 0, -g) = \big(0,\ -g\sin\delta\theta_0,\ -g(1 - \cos\delta\theta_0)\big).$$

The horizontal part, of magnitude $g \sin\delta\theta_0 = g\,\delta\theta_0 + O(\delta\theta_0^3)$, is the gravity leak; the vertical part $-g(1 - \cos\delta\theta_0) \approx -\frac{1}{2} g\,\delta\theta_0^2$ is second order. (The exact magnitude of the whole error vector is $2g \sin(\delta\theta_0/2)$.) The first-order formula overestimates the horizontal leak by the factor $\delta\theta_0/\sin\delta\theta_0 \approx 1 + \delta\theta_0^2/6$, which reaches 1.01 at $\delta\theta_0 = 0.244$ rad $\approx 14°$. For the milliradian tilts of a working filter, $g\,\delta\theta$ is essentially exact; it becomes inaccurate only for gross initialization errors.

**1.3** A camera $i$ with pose $(R_i, p_i)$ sees the point $p_f$ at camera coordinates $R_i^\mathsf{T}(p_f - p_i)$. After the common transformation $R_i \mapsto RR_i$, $p_i \mapsto Rp_i + t$, $p_f \mapsto Rp_f + t$,

$$(RR_i)^\mathsf{T}\big(Rp_f + t - Rp_i - t\big) = R_i^\mathsf{T} R^\mathsf{T} R\,(p_f - p_i) = R_i^\mathsf{T}(p_f - p_i),$$

so every image is unchanged. Combined with Proposition 1.1, the images are invariant under every similarity transformation $p \mapsto sRp + t$: a monocular camera has $3+3+1 = 7$ unobservable degrees of freedom (rotation, translation and scale). An IMU removes three of them. The accelerometer measures acceleration in metric units, and scaling the trajectory by $s$ scales its accelerations by $s$, so scale becomes observable whenever the body accelerates. The accelerometer also measures the direction of gravity in the body frame, which a rotation about a horizontal axis would change, so roll and pitch become observable. Rotations about the vertical and translations change neither gravity nor any acceleration, so four unobservable directions remain: global position and yaw (Theorem 29.3).

**1.4** During a perfect hover the true rate, velocity and acceleration are all zero. Consider what each sensor reports.

- The *camera* sees identical images. The relative rotation between frames is observed to be zero, but with no baseline there is no parallax: neither the depths of the features nor any translation can be measured, because an unchanged image is also what a slowly translating camera sees in a distant scene.
- The *gyroscope* reads $b_g$ plus noise. Since the camera pins the true rotation to zero, the

reading is the bias: $b_g$ is estimable, exactly as in the static calibration of Chapter 16.

- The *accelerometer* reads $R_{wb}^{\mathsf{T}}(-g_w) + b_a$. Its direction gives roll and pitch, but only up to the horizontal bias: a horizontal $b_a$ is indistinguishable from a tilt of $\|b_a\|/g$, because without rotation the bias and gravity never move relative to each other.

Hence the gyro bias, and roll and pitch combined with the horizontal accelerometer bias, can be estimated. What cannot be distinguished: tilt from horizontal $b_a$; a velocity error, or a constant acceleration error such as the vertical bias, from the true (zero) motion, since nothing measures translation and such errors integrate unseen; the metric scale and the feature depths (no acceleration, no baseline); and, as always, global position and yaw. This is the "at rest" row of the degenerate motions of Chapter 29. A real system detects the hover and applies a zero-velocity update (Chapter 18): the pseudo-measurement $v = 0$ stops the velocity and position drift and makes the vertical bias observable, while tilt and horizontal bias separate only once the vehicle rotates.

**1.5** A model answer: *EKF-SLAM puts every observed feature into the state vector, so the cost of each update grows quadratically with the number of features, which makes it impossible to use the hundreds of features visible in every image in real time. The MSCKF instead keeps a sliding window of past camera poses in the state and turns each feature track into constraints among all the poses that observed it, eliminating the feature position from the linearized equations, so the cost becomes linear in the number of features while the geometric information of each track is still used.*

Part I

# Mathematical Foundations

Chapter 2

# Vectors, Matrices and Linear Maps

**In this chapter**

- Build linear algebra from scratch: vectors, vector spaces, bases, coordinates, inner products and the cross product.
- Understand a matrix as a linear map, matrix multiplication as composition, and the transpose, inverse, rank and determinant.
- Master the cross-product matrix $[a]_\times$ and the identities used in every rotation derivation.
- Understand orthogonal matrices, eigenvalues and eigenvectors, and prove that every 3D rotation has an axis.
- Understand symmetric and positive-definite matrices, quadratic forms and their ellipsoids, the language in which uncertainty is expressed.

Linear algebra is the grammar of state estimation. States are vectors, rotations and covariances are matrices, sensor models are linearized into matrices, and every filter step is a handful of matrix products and solutions of linear systems. This chapter develops the subject from first principles with the geometric meaning of each concept in view. Chapter 3 then turns to the numerical algorithms that make these operations reliable on a computer.

## 2.1 Vectors

### 2.1.1 Arrows and lists of numbers

A *vector* is first of all a geometric object: an arrow with a length and a direction, such as a displacement, a velocity or the direction of gravity. Two arrows with the same length and direction are the same vector, wherever they are drawn. Vectors can be *added* (place them head to tail; the sum goes from the first tail to the last head) and *scaled* (stretch by a real factor; a negative factor reverses the direction).

To compute, we pick three mutually perpendicular unit arrows $e_1, e_2, e_3$, the *axes*, and write every vector as a combination $v = v_1 e_1 + v_2 e_2 + v_3 e_3$. The three numbers $(v_1, v_2, v_3)$ are the *coordinates* of $v$, and we stack them into a *column*

$$v = \begin{bmatrix} v_1 \\ v_2 \\ v_3 \end{bmatrix} \in \mathbb{R}^3. \tag{2.1}$$

Addition and scaling act coordinate by coordinate: $(u + v)_i = u_i + v_i$ and $(\alpha v)_i = \alpha v_i$. More generally $\mathbb{R}^n$ is the set of columns of $n$ real numbers. A state vector of a navigation filter,

such as the 15 numbers of an IMU error state, lives in $\mathbb{R}^{15}$, even though it cannot be drawn.

**Key idea: a vector is not its coordinates**

The same physical arrow has different coordinates in different sets of axes. The velocity of a drone is one arrow, but its coordinates in the world frame and in the body frame differ. Throughout these notes a subscript names the frame: $v_w$ and $v_b$ are the coordinates of the same vector in the world and body frames. Forgetting which frame a coordinate vector refers to is the most common bug in navigation software.

### 2.1.2 Vector spaces

Many objects besides arrows can be added and scaled: polynomials, functions, matrices. The abstraction that captures all of them is the vector space.

**Definition 2.1** (Vector space)**.** A *vector space* over $\mathbb{R}$ is a set $V$ with an addition $u + v$ and a scalar multiplication $\alpha v$ ($\alpha \in \mathbb{R}$) such that, for all $u, v, w \in V$ and $\alpha, \beta \in \mathbb{R}$: $u + v = v + u$; $(u + v) + w = u + (v + w)$; there is a zero vector with $v + 0 = v$; every $v$ has a negative $-v$ with $v + (-v) = 0$; $\alpha(u + v) = \alpha u + \alpha v$; $(\alpha + \beta)v = \alpha v + \beta v$; $\alpha(\beta v) = (\alpha\beta)v$; and $1v = v$.

Examples: $\mathbb{R}^n$; the set of all $m \times n$ matrices; the set of polynomials of degree at most $d$; and, of great importance later, the set of $3 \times 3$ *skew-symmetric* matrices ($S^\mathsf{T} = -S$), which is closed under addition and scaling and will turn out to be the "tangent space" of the rotation group (Chapter 8). A non-example: the set of unit vectors in $\mathbb{R}^3$ (the sum of two unit vectors is usually not a unit vector). Likewise, the set of rotation matrices is *not* a vector space, which is the root of most of the difficulties of Chapters 7 and 8.

A *subspace* is a subset of a vector space that is itself a vector space under the same operations; it suffices to check that it contains 0 and is closed under addition and scaling. Lines and planes through the origin are the subspaces of $\mathbb{R}^3$; a line that misses the origin is not.

### 2.1.3 Linear combinations, span and independence

**Definition 2.2.** A *linear combination* of $v_1, \dots, v_k$ is a vector $\alpha_1 v_1 + \cdots + \alpha_k v_k$. The *span* of the $v_i$ is the set of all their linear combinations; it is a subspace. The vectors are *linearly independent* if the only combination that gives zero is the trivial one:

$$\alpha_1 v_1 + \cdots + \alpha_k v_k = 0 \quad \Longrightarrow \quad \alpha_1 = \cdots = \alpha_k = 0. \tag{2.2}$$

Otherwise they are *linearly dependent*: one of them is a combination of the others.

In $\mathbb{R}^3$: two vectors are dependent exactly when they are parallel; three vectors are dependent exactly when they lie in a common plane through the origin. Testing independence means solving a homogeneous linear system, which Section 2.5 shows how to do.

### 2.1.4 Basis, dimension and coordinates

**Definition 2.3** (Basis)**.** A *basis* of a vector space $V$ is a linearly independent set of vectors that spans $V$.

**Theorem 2.4** (Dimension)**.** *All bases of a vector space have the same number of elements, called its* dimension.

We omit the proof, which is a careful counting argument (a set of $k$ independent vectors cannot lie in the span of fewer than $k$ vectors). $\mathbb{R}^n$ has dimension $n$, the $m \times n$ matrices have dimension $mn$, and the $3 \times 3$ skew-symmetric matrices have dimension three (three free entries), the same as the number of degrees of freedom of a rotation.

**Proposition 2.5** (Coordinates are unique)**.** *If $b_1, \dots, b_n$ is a basis, every $v \in V$ can be written as $v = \sum_i c_i b_i$ in exactly one way. The numbers $c_i$ are the coordinates of $v$ in that basis.*

*Proof.* Existence holds because the basis spans $V$. If also $v = \sum_i c'_i b_i$, subtracting gives $\sum_i (c_i - c'_i) b_i = 0$, and independence forces $c_i = c'_i$. ∎

Changing the basis changes the coordinates of every vector but not the vectors. Section 2.7 computes how coordinates change when one orthonormal basis is replaced by another, which is exactly what a rotation matrix between two frames does.

## 2.2 Inner products, lengths and angles

### 2.2.1 The dot product

**Definition 2.6** (Dot product and norm)**.** The *dot product* (inner product) of $a, b \in \mathbb{R}^n$ is $a^{\mathsf{T}} b = a \cdot b = \sum_i a_i b_i$, and the (Euclidean) *norm* or length is $\|a\| = \sqrt{a^{\mathsf{T}} a}$. A *unit vector* has norm one; $a/\|a\|$ *normalizes* a non-zero $a$.

The dot product is symmetric ($a^{\mathsf{T}} b = b^{\mathsf{T}} a$), linear in each argument, and positive ($a^{\mathsf{T}} a > 0$ for $a \neq 0$). Its geometric meaning comes from the law of cosines.

**Proposition 2.7** (Geometric dot product)**.** *If $\theta$ is the angle between non-zero $a$ and $b$, then $a^{\mathsf{T}} b = \|a\| \|b\| \cos\theta$.*

*Proof.* The triangle with sides $a$, $b$ and $a - b$ satisfies the law of cosines $\|a - b\|^2 = \|a\|^2 + \|b\|^2 - 2\|a\|\|b\|\cos\theta$. Expanding the left side with bilinearity gives $\|a\|^2 - 2a^{\mathsf{T}} b + \|b\|^2$. Comparing the two expressions proves the claim. ∎

Vectors are *orthogonal* ($a \perp b$) when $a^{\mathsf{T}} b = 0$. For orthogonal vectors the Pythagorean theorem $\|a + b\|^2 = \|a\|^2 + \|b\|^2$ follows by expanding the left side.

**Theorem 2.8** (Cauchy–Schwarz and triangle inequalities)**.** *For all $a, b \in \mathbb{R}^n$, $|a^{\mathsf{T}} b| \leq \|a\|\|b\|$ and $\|a + b\| \leq \|a\| + \|b\|$.*

*Proof.* For $b = 0$ both are trivial. Otherwise, for every real $t$, $0 \leq \|a - tb\|^2 = \|a\|^2 - 2t\, a^{\mathsf{T}} b + t^2 \|b\|^2$. A quadratic in $t$ that is never negative has a non-positive discriminant: $4(a^{\mathsf{T}} b)^2 - 4\|a\|^2\|b\|^2 \leq 0$, which is the first inequality. Then $\|a + b\|^2 = \|a\|^2 + 2a^{\mathsf{T}} b + \|b\|^2 \leq \|a\|^2 + 2\|a\|\|b\| + \|b\|^2 = (\|a\| + \|b\|)^2$. ∎





**Figure 2.1:** Orthogonal projection of $a$ onto the direction of $b$. The remainder $a_\perp$ is orthogonal to $b$, and the projection is the closest point to $a$ on the line spanned by $b$.

### 2.2.2 Orthonormal bases and projections

A basis $e_1, \dots, e_n$ is *orthonormal* if $e_i^\mathsf{T} e_j = 1$ for $i = j$ and 0 otherwise. In an orthonormal basis, coordinates are simply dot products: dotting $v = \sum_j c_j e_j$ with $e_i$ leaves

$$c_i = e_i^\mathsf{T} v. \tag{2.3}$$

This is why navigation always uses orthonormal (Cartesian) axes: finding coordinates requires no equation solving.

**Proposition 2.9** (Projection onto a direction)**.** *For $b \neq 0$, the point of the line $\{tb\}$ closest to $a$ is $\mathrm{proj}_b a = \frac{a^\mathsf{T} b}{b^\mathsf{T} b} b$, and the remainder $a - \mathrm{proj}_b a$ is orthogonal to $b$ (Figure 2.1).*

*Proof.* $f(t) = \|a - tb\|^2 = \|a\|^2 - 2t\, a^\mathsf{T} b + t^2 \|b\|^2$ is a parabola minimized where $f'(t) = 0$, i.e. $t = a^\mathsf{T} b / b^\mathsf{T} b$. Then $b^\mathsf{T}(a - tb) = a^\mathsf{T} b - t\, b^\mathsf{T} b = 0$. ∎

Every vector therefore splits into a component along $b$ and a component perpendicular to it. This decomposition is the heart of Rodrigues' rotation formula (Chapter 7): a rotation leaves the component along its axis alone and turns the perpendicular component.

**Gram–Schmidt.** Any basis $a_1, \dots, a_n$ can be turned into an orthonormal basis $q_1, \dots, q_n$ spanning the same nested subspaces, by subtracting from each vector its projections onto the previous ones and normalizing:

$$\tilde{q}_k = a_k - \sum_{j<k} (q_j^\mathsf{T} a_k)\, q_j, \qquad q_k = \tilde{q}_k / \|\tilde{q}_k\|. \tag{2.4}$$

By construction $\tilde{q}_k$ is orthogonal to $q_1, \dots, q_{k-1}$, and it cannot be zero because $a_k$ is not in the span of the previous vectors. Recording the coefficients $q_j^\mathsf{T} a_k$ gives the QR factorization of Chapter 3.

## 2.3 The cross product

### 2.3.1 Definition and geometry

**Definition 2.10** (Cross product). For $a, b \in \mathbb{R}^3$,

$$a \times b = \begin{bmatrix} a_2 b_3 - a_3 b_2 \\ a_3 b_1 - a_1 b_3 \\ a_1 b_2 - a_2 b_1 \end{bmatrix}. \tag{2.5}$$

A convenient mnemonic is the formal determinant with rows $(e_1, e_2, e_3)$, $(a_1, a_2, a_3)$ and $(b_1, b_2, b_3)$. The cross product is *bilinear*, *anti-commutative* ($a \times b = -b \times a$, so $a \times a = 0$), and orthogonal to both factors: $a^\mathsf{T}(a \times b) = 0$, which can be verified by expanding.

**Proposition 2.11** (Length of the cross product). *$\|a \times b\|^2 = \|a\|^2\|b\|^2 - (a^\mathsf{T} b)^2$ (Lagrange's identity), hence $\|a \times b\| = \|a\|\|b\| \sin\theta$, the area of the parallelogram spanned by $a$ and $b$.*

*Proof.* Expand both sides in coordinates; all terms match. Then substitute $a^\mathsf{T} b = \|a\|\|b\| \cos\theta$ and use $1 - \cos^2\theta = \sin^2\theta$. ∎

The direction of $a \times b$ follows the *right-hand rule*: with the fingers of the right hand curling from $a$ to $b$, the thumb points along $a \times b$. In particular $e_1 \times e_2 = e_3$, $e_2 \times e_3 = e_1$ and $e_3 \times e_1 = e_2$. A coordinate system obeying these relations is *right-handed*; all frames in these notes are.

The *scalar triple product* $a^\mathsf{T}(b \times c)$ is the signed volume of the parallelepiped spanned by $a$, $b$ and $c$; it equals the determinant of the matrix with columns $a, b, c$ (Section 2.6), is unchanged by cyclic permutations, and changes sign when two vectors are swapped. The *vector triple product* obeys the "BAC–CAB" rule

$$a \times (b \times c) = b\,(a^\mathsf{T} c) - c\,(a^\mathsf{T} b), \tag{2.6}$$

which can be checked in coordinates (it suffices to check basis vectors, by linearity).

### 2.3.2 The cross-product matrix

Because $a \times b$ is linear in $b$, it is a matrix-vector product (Section 2.4).

**Definition 2.12** (Skew-symmetric matrix). For $a = (a_1, a_2, a_3)^\mathsf{T}$, the *cross-product matrix* (or skew-symmetric matrix) of $a$ is

$$[a]_\times = \begin{bmatrix} 0 & -a_3 & a_2 \\ a_3 & 0 & -a_1 \\ -a_2 & a_1 & 0 \end{bmatrix}, \qquad \text{so that} \qquad [a]_\times b = a \times b \quad \forall\, b \in \mathbb{R}^3. \tag{2.7}$$

It is skew-symmetric: $[a]_\times^\mathsf{T} = -[a]_\times$. Conversely, every $3 \times 3$ skew-symmetric matrix $S$ equals $[s]_\times$ for the unique vector $s = (S_{32}, S_{13}, S_{21})^\mathsf{T}$; we write $s = S^\vee$ for this inverse operation, the *vee* map. In Lie theory $[\cdot]_\times$ is also written $(\cdot)^\wedge$ and called the *hat* map.

The following identities are used constantly in derivations; learn to recognize them on sight.

**Proposition 2.13** (Cross-product identities). *For $a, b, c \in \mathbb{R}^3$ and a rotation matrix $R$ (Sec-*

*tion 2.7):*

$$[a]_\times b = -[b]_\times a, \tag{2.8}$$
$$[a]_\times a = 0, \tag{2.9}$$
$$[a]_\times^2 = aa^\mathsf{T} - \|a\|^2 I, \tag{2.10}$$
$$[a]_\times^3 = -\|a\|^2 [a]_\times, \tag{2.11}$$
$$[a]_\times [b]_\times = ba^\mathsf{T} - (a^\mathsf{T} b)\, I, \tag{2.12}$$
$$[a \times b]_\times = [a]_\times [b]_\times - [b]_\times [a]_\times = ba^\mathsf{T} - ab^\mathsf{T}, \tag{2.13}$$
$$[Ra]_\times = R[a]_\times R^\mathsf{T}, \tag{2.14}$$
$$R\,(a \times b) = (Ra) \times (Rb). \tag{2.15}$$

*Proof.* (2.8) and (2.9) restate anti-commutativity. For (2.12), apply both sides to an arbitrary $c$ and use (2.6): $[a]_\times [b]_\times c = a \times (b \times c) = b\, a^\mathsf{T} c - c\, (a^\mathsf{T} b)$. Setting $b = a$ gives (2.10), and multiplying (2.10) on the left by $[a]_\times$ and using (2.9) gives (2.11). Subtracting (2.12) from its version with $a$ and $b$ swapped gives the second equality of (2.13); applying $ba^\mathsf{T} - ab^\mathsf{T}$ to $c$ and using (2.6) once more shows it equals $[a \times b]_\times c$. For (2.15), the cross product is defined by lengths, angles and orientation, all preserved by a rotation (Section 2.7). Finally (2.14) follows from (2.15): $[Ra]_\times\, c = (Ra) \times (RR^\mathsf{T} c) = R\,(a \times R^\mathsf{T} c) = R[a]_\times R^\mathsf{T} c$. ∎

**Key idea: moving a vector out of a cross product**

Identity (2.8) is how unknowns are isolated in Jacobian derivations. A small rotation error $\delta\theta$ typically appears as $[\delta\theta]_\times v$; rewriting it as $-[v]_\times\, \delta\theta$ makes it a matrix times the unknown, and the matrix $-[v]_\times$ is the Jacobian.

Identity (2.11) is what makes closed-form rotation formulas possible: every power of $[a]_\times$ reduces to a multiple of $[a]_\times$ or $[a]_\times^2$, so infinite series in $[a]_\times$ collapse to two terms (Chapter 7).

## 2.4 Matrices as linear maps

### 2.4.1 Matrices and the matrix-vector product

An $m \times n$ *matrix* $A$ is a rectangular array of numbers $A_{ij}$ with $m$ rows and $n$ columns. Its product with $x \in \mathbb{R}^n$ is the vector $Ax \in \mathbb{R}^m$ with entries $(Ax)_i = \sum_j A_{ij} x_j$. There are two ways to read this product, and both are indispensable:

$$Ax = \begin{bmatrix} r_1^\mathsf{T} x \\ \vdots \\ r_m^\mathsf{T} x \end{bmatrix} \quad \text{(dot products with the rows } r_i^\mathsf{T}\text{)}, \tag{2.16}$$

$$Ax = x_1 a_1 + x_2 a_2 + \cdots + x_n a_n \quad \text{(combination of the columns } a_j\text{)}.$$

The column view says that the possible outputs $Ax$ are exactly the linear combinations of the columns of $A$.

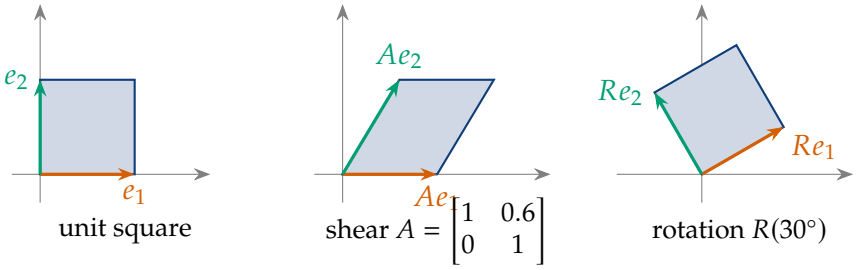



**Figure 2.2:** A linear map is determined by the images of the basis vectors, which are the columns of its matrix. The unit square becomes a parallelogram; its area is scaled by the determinant (1 for both maps shown).

### 2.4.2 Linear maps

**Definition 2.14** (Linear map)**.** A function $f : \mathbb{R}^n \to \mathbb{R}^m$ is *linear* if $f(u+v) = f(u) + f(v)$ and $f(\alpha u) = \alpha f(u)$ for all vectors $u, v$ and scalars $\alpha$.

**Theorem 2.15** (Linear maps are matrices)**.** *Every linear map $f : \mathbb{R}^n \to \mathbb{R}^m$ is multiplication by a unique $m \times n$ matrix, whose $j$-th column is $f(e_j)$, the image of the $j$-th basis vector.*

*Proof.* Write $x = \sum_j x_j e_j$. By linearity $f(x) = \sum_j x_j f(e_j)$, which is the column view of $Ax$ with columns $a_j = f(e_j)$. Uniqueness: two matrices that agree on all basis vectors have the same columns. ∎

This theorem turns geometric questions into matrix questions: to find the matrix of a geometric operation, ask where it sends each basis vector.

**Example 2.16** (Rotation in the plane)**.** Rotating the plane counter-clockwise by $\theta$ sends $e_1 = (1, 0)$ to $(\cos\theta, \sin\theta)$ and $e_2 = (0, 1)$ to $(-\sin\theta, \cos\theta)$. Rotation is linear (it preserves parallelograms), so its matrix is

$$R(\theta) = \begin{bmatrix} \cos\theta & -\sin\theta \\ \sin\theta & \cos\theta \end{bmatrix}. \tag{2.17}$$

### 2.4.3 Matrix multiplication is composition

If $B$ is $m \times n$ and $A$ is $p \times m$, applying $B$ and then $A$ is again linear, and its matrix is the *matrix product* $AB$: $(AB)x = A(Bx)$. Its $j$-th column is $A$ applied to the $j$-th column of $B$, and its entries are

$$(AB)_{ik} = \sum_j A_{ij} B_{jk}. \tag{2.18}$$

Because composition of functions is associative, so is matrix multiplication: $(AB)C = A(BC)$. It is *not* commutative: rotating and then shearing is not the same as shearing and then rotating. For rotations in three dimensions non-commutativity is unavoidable and is the defining difficulty of attitude estimation. The *identity matrix* $I$, with ones on the diagonal, leaves every vector unchanged: $AI = IA = A$.

**Reading a product of transformations.** In $ABx$, the transformation applied first is the one closest to $x$, here $B$. With frame-annotated rotations (Chapter 7), $R_{wb}R_{bc}x_c$ first expresses the camera vector $x_c$ in the body frame and then in the world frame.

### 2.4.4 Transpose and special matrices

The *transpose* $A^\mathsf{T}$ swaps rows and columns: $(A^\mathsf{T})_{ij} = A_{ji}$. The dot product is a matrix product, $a^\mathsf{T}b$, and transposition reverses products:

$$(AB)^\mathsf{T} = B^\mathsf{T}A^\mathsf{T}, \tag{2.19}$$

because $((AB)^\mathsf{T})_{ki} = (AB)_{ik} = \sum_j A_{ij}B_{jk} = \sum_j (B^\mathsf{T})_{kj}(A^\mathsf{T})_{ji}$. A matrix is *symmetric* if $A^\mathsf{T} = A$ and *skew-symmetric* if $A^\mathsf{T} = -A$; every square matrix splits uniquely as $A = \frac{1}{2}(A + A^\mathsf{T}) + \frac{1}{2}(A - A^\mathsf{T})$, a symmetric plus a skew-symmetric part. Covariance matrices are symmetric; cross-product matrices are skew-symmetric.

Other matrices with names: *diagonal* matrices (non-zero entries only on the diagonal), *upper* and *lower triangular* matrices (zeros below or above the diagonal), and the *outer product* $ab^\mathsf{T}$ of two vectors, an $m \times n$ matrix with entries $a_i b_j$ whose columns are all multiples of $a$.

**Block matrices.** Matrices can be partitioned into blocks, and blocks multiply like entries as long as their sizes are compatible:

$$\begin{bmatrix} A & B \\ C & D \end{bmatrix} \begin{bmatrix} E & F \\ G & H \end{bmatrix} = \begin{bmatrix} AE + BG & AF + BH \\ CE + DG & CF + DH \end{bmatrix}. \tag{2.20}$$

Filters are written almost entirely in block form: the IMU state and the clones, position and attitude, poses and landmarks.

## 2.5 Linear systems, inverses and rank

### 2.5.1 Solving linear systems

Given $A$ and $b$, find $x$ with $Ax = b$. In the column view: find the combination of the columns of $A$ that produces $b$. Three things can happen: exactly one solution, none ($b$ is not a combination of the columns), or infinitely many (some combination of the columns gives zero, and it can be added to any solution).

*Gaussian elimination* solves the system by *row operations* that do not change the solution set: swapping two equations, scaling an equation by a non-zero number, and subtracting a multiple of one equation from another. They are used to create zeros below the diagonal (the *pivots*) column by column, after which the equations are solved from the bottom up by *back substitution*.

**Example 2.17** (Elimination).

$$\begin{aligned} 2x_1 + x_2 + x_3 &= 5 \\ 4x_1 + 3x_2 + 3x_3 &= 13 \\ 2x_1 + 3x_2 + 4x_3 &= 13 \end{aligned} \xrightarrow{(2)-2(1),\ (3)-(1)} \begin{aligned} 2x_1 + x_2 + x_3 &= 5 \\ x_2 + x_3 &= 3 \\ 2x_2 + 3x_3 &= 8 \end{aligned} \xrightarrow{(3)-2(2)} \begin{aligned} 2x_1 + x_2 + x_3 &= 5 \\ x_2 + x_3 &= 3 \\ x_3 &= 2 \end{aligned}$$

Back substitution gives $x_3 = 2$, $x_2 = 1$ and $x_1 = 1$. The multipliers $2, 1, 2$ used along the way are the entries of the lower-triangular factor $L$ of an $LU$ factorization $A = LU$ (Chapter 3).

### 2.5.2 The inverse

A square matrix $A$ is *invertible* if there is a matrix $A^{-1}$ with $AA^{-1} = A^{-1}A = I$. Then $Ax = b$ has the unique solution $x = A^{-1}b$. Useful facts, each verified by multiplying out:

$$(AB)^{-1} = B^{-1}A^{-1}, \qquad (A^{\mathsf{T}})^{-1} = (A^{-1})^{\mathsf{T}}, \qquad \begin{bmatrix} a & b \\ c & d \end{bmatrix}^{-1} = \frac{1}{ad - bc} \begin{bmatrix} d & -b \\ -c & a \end{bmatrix}. \tag{2.21}$$

For a square matrix the following are equivalent: $A$ is invertible; $Ax = 0$ only for $x = 0$; the columns are independent; elimination produces $n$ non-zero pivots; $\det A \neq 0$ (Section 2.6). In numerical work one almost never computes $A^{-1}$ explicitly; Chapter 3 explains why and what to do instead.

### 2.5.3 Range, nullspace and rank

**Definition 2.18.** For $A \in \mathbb{R}^{m \times n}$: the *range* (column space) $\operatorname{range}(A) = \{Ax\} \subseteq \mathbb{R}^m$; the *nullspace* $\operatorname{null}(A) = \{x : Ax = 0\} \subseteq \mathbb{R}^n$; and the *rank* $\operatorname{rank} A = \dim \operatorname{range}(A)$.

The rank is the number of independent columns, and also the number of pivots produced by elimination. A surprising and useful fact is that row rank equals column rank: $\operatorname{rank} A = \operatorname{rank} A^{\mathsf{T}}$.

**Theorem 2.19** (Rank–nullity). *For $A \in \mathbb{R}^{m \times n}$, $\dim \operatorname{null}(A) + \operatorname{rank} A = n$.*

*Proof sketch.* Choose a basis $u_1, \dots, u_k$ of $\operatorname{null}(A)$ and extend it with $w_1, \dots, w_r$ to a basis of $\mathbb{R}^n$, so $k + r = n$. The vectors $Aw_1, \dots, Aw_r$ span $\operatorname{range}(A)$ (the $Au_i$ vanish), and they are independent: if $\sum c_i Aw_i = 0$ then $\sum c_i w_i \in \operatorname{null}(A)$, which forces all $c_i = 0$ because the $u$'s and $w$'s together are independent. So $\operatorname{rank} A = r = n - k$. ∎

Each dimension of the nullspace is a direction of $x$ that the map destroys. In estimation, the nullspace of a measurement Jacobian $H$ is the set of state errors the measurement cannot see (Chapter 18), and the nullspace of an observability matrix is the set of state directions no measurement history can determine (Chapters 11 and 29).

### 2.5.4 The four fundamental subspaces

Each $A \in \mathbb{R}^{m \times n}$ of rank $r$ has four associated subspaces:





**Figure 2.3:** The determinant of a $2 \times 2$ matrix is the signed area of the parallelogram spanned by its columns; the sign is positive when the second column lies counter-clockwise from the first.

| Subspace | Definition | Lives in | Dimension |
|---|---|---|---|
| column space (range) | $\text{range}(A) = \{Ax\}$ | $\mathbb{R}^m$ | $r$ |
| nullspace | $\text{null}(A) = \{x : Ax = 0\}$ | $\mathbb{R}^n$ | $n - r$ |
| row space | $\text{range}(A^\mathsf{T})$ | $\mathbb{R}^n$ | $r$ |
| left nullspace | $\text{null}(A^\mathsf{T}) = \{y : y^\mathsf{T}A = 0\}$ | $\mathbb{R}^m$ | $m - r$ |

**Theorem 2.20** (Fundamental theorem of linear algebra)**.** $\text{null}(A) = \text{range}(A^\mathsf{T})^\perp$ *and* $\text{null}(A^\mathsf{T}) = \text{range}(A)^\perp$*, where* $S^\perp$ *denotes the set of vectors orthogonal to every vector of* $S$*. Consequently every* $y \in \mathbb{R}^m$ *splits uniquely as* $y = y_r + y_n$ *with* $y_r \in \text{range}(A)$ *and* $y_n \in \text{null}(A^\mathsf{T})$*,* $y_r \perp y_n$*.*

*Proof.* $y \in \text{null}(A^\mathsf{T}) \iff A^\mathsf{T}y = 0 \iff x^\mathsf{T}A^\mathsf{T}y = 0\ \forall x \iff (Ax)^\mathsf{T}y = 0\ \forall x \iff y \perp \text{range}(A)$. The first statement is the same argument applied to $A^\mathsf{T}$. The decomposition follows by projecting $y$ onto $\text{range}(A)$ (Chapter 3). ∎

The *left nullspace* deserves special attention because the MSCKF is built on it. Suppose a stacked measurement depends on an unwanted variable $f$ through a tall matrix $H_f \in \mathbb{R}^{m\times 3}$ of full column rank:

$$r = H_x\,\delta x + H_f\,\delta f + n. \tag{2.22}$$

Take any matrix $A$ whose $m - 3$ columns form an orthonormal basis of $\text{null}(H_f^\mathsf{T})$. Then $A^\mathsf{T}H_f = 0$, and multiplying through by $A^\mathsf{T}$ gives $A^\mathsf{T}r = A^\mathsf{T}H_x\,\delta x + A^\mathsf{T}n$: the unwanted variable has disappeared. Chapter 26 proves that no information about $\delta x$ is lost.

## 2.6 Determinants

### 2.6.1 Determinants as signed volumes

A linear map sends the unit square (cube) to a parallelogram (parallelepiped). The *determinant* is the factor by which it scales areas (volumes), with a sign that records whether it preserves or reverses orientation. For a $2 \times 2$ matrix the parallelogram spanned by the columns $(a, c)$ and $(b, d)$ has signed area $ad - bc$ (Figure 2.3); for a $3 \times 3$ matrix with columns $a_1, a_2, a_3$ the

signed volume is the triple product:

$$\det \begin{bmatrix} a & b \\ c & d \end{bmatrix} = ad - bc, \qquad \det \begin{bmatrix} a_1 & a_2 & a_3 \end{bmatrix} = a_1^{\mathsf{T}}(a_2 \times a_3). \tag{2.23}$$

### 2.6.2 Definition and properties

In general, the determinant is the unique function of the columns of a square matrix that is

1. linear in each column separately (*multilinear*),
2. zero whenever two columns are equal (*alternating*; equivalently, it changes sign when two columns are swapped), and
3. normalized: $\det I = 1$.

These three rules determine everything. Adding a multiple of one column to another does not change the determinant (by linearity, the change is a determinant with two equal columns, which is zero); hence the same holds for rows, and elimination reduces any determinant to that of a triangular matrix, which is the product of its diagonal entries. Expanding along the first row gives the *cofactor* (Laplace) formula

$$\det A = \sum_{j=1}^{n} (-1)^{1+j} A_{1j} \det M_{1j}, \tag{2.24}$$

where $M_{1j}$ deletes row 1 and column $j$. It is convenient for $3\times3$ matrices by hand and hopeless for large ones, whose determinants are computed from an $LU$ or Cholesky factorization.

**Proposition 2.21** (Properties of the determinant)**.** *For square $A$ and $B$ of the same size:*

1. $\det(AB) = \det A \, \det B$ *(volume scaling factors multiply under composition);*
2. $\det A^{\mathsf{T}} = \det A$*;*
3. *$A$ is invertible if and only if $\det A \neq 0$, and then $\det A^{-1} = 1/\det A$;*
4. *the determinant of a triangular or diagonal matrix is the product of its diagonal entries.*

Property 3 has a clear geometric meaning: $\det A = 0$ means the map flattens space onto a lower-dimensional subspace, destroying information, so it cannot be undone. The sign of the determinant distinguishes *rotations* (which preserve orientation, $\det = +1$) from *reflections* (which reverse it, $\det = -1$); the next section makes this precise.

## 2.7 Orthogonal matrices and change of basis

**Definition 2.22** (Orthogonal matrix)**.** A square matrix $Q$ is *orthogonal* if $Q^{\mathsf{T}}Q = I$, i.e. its columns are orthonormal. Then $Q^{-1} = Q^{\mathsf{T}}$.

**Proposition 2.23** (Orthogonal matrices preserve geometry)**.** *If $Q$ is orthogonal then $(Qa)^{\mathsf{T}}(Qb) = a^{\mathsf{T}}b$ for all $a, b$: lengths and angles are preserved. Moreover $\det Q = \pm 1$.*

*Proof.* $(Qa)^{\mathsf{T}}(Qb) = a^{\mathsf{T}}Q^{\mathsf{T}}Qb = a^{\mathsf{T}}b$. And $1 = \det I = \det(Q^{\mathsf{T}}Q) = (\det Q)^2$. ∎

Orthogonal matrices with $\det Q = +1$ are *rotations*; those with $\det Q = -1$ are rotations combined with a reflection, which turn right-handed frames into left-handed ones. The orthogonal $n \times n$ matrices form the *orthogonal group* $\mathrm{O}(n)$, and the rotations form the *special orthogonal group* $\mathrm{SO}(n)$. Products and inverses of rotations are rotations.

**Change of orthonormal basis.** Let $e_1, e_2, e_3$ be the axes of a frame $W$ and $b_1, b_2, b_3$ those of a frame $B$, and let $R$ be the matrix whose columns are the coordinates of $b_1, b_2, b_3$ in $W$. A vector with coordinates $v_b$ in $B$ is $v = \sum_j (v_b)_j b_j$; its coordinates in $W$ are therefore

$$v_w = \sum_j (v_b)_j \,(\text{coordinates of } b_j \text{ in } W) = R\, v_b, \qquad v_b = R^{\mathsf{T}} v_w. \tag{2.25}$$

The matrix $R$ is orthogonal because its columns are orthonormal, and it is a rotation when both frames are right-handed. This is exactly the rotation matrix $R_{wb}$ of Chapter 7: its columns are the body axes in world coordinates, and it maps body coordinates to world coordinates.

## 2.8 Eigenvalues and eigenvectors

### 2.8.1 Definitions

**Definition 2.24.** A non-zero vector $v$ is an *eigenvector* of a square matrix $A$, with *eigenvalue* $\lambda$, if $Av = \lambda v$: the map only stretches $v$, by the factor $\lambda$.

Rewriting $Av = \lambda v$ as $(A - \lambda I)v = 0$ shows that $\lambda$ is an eigenvalue exactly when $A - \lambda I$ has a non-trivial nullspace, i.e. when the *characteristic polynomial* vanishes:

$$p(\lambda) = \det(A - \lambda I) = 0. \tag{2.26}$$

For a $2 \times 2$ matrix, $p(\lambda) = \lambda^2 - (\operatorname{tr} A)\lambda + \det A$, where $\operatorname{tr} A$ is the sum of the diagonal entries (the *trace*). An $n \times n$ matrix has $n$ eigenvalues counted with multiplicity, which may be complex even when $A$ is real. Comparing the coefficients of $p(\lambda) = \prod_i (\lambda_i - \lambda)$ shows that

$$\operatorname{tr} A = \sum_i \lambda_i, \qquad \det A = \prod_i \lambda_i. \tag{2.27}$$

### 2.8.2 Complex numbers in one paragraph

A complex number $z = x + iy$ has a real part $x$ and an imaginary part $y$, with $i^2 = -1$. It can be pictured as the point $(x, y)$ of the plane; its modulus is $|z| = \sqrt{x^2 + y^2}$ and its argument is the angle of the point. Euler's formula

$$e^{i\theta} = \cos\theta + i \sin\theta \tag{2.28}$$

follows from the power series of $e^x$, $\cos x$ and $\sin x$ by substituting $x = i\theta$. Multiplying a complex number by $e^{i\theta}$ rotates the corresponding point by $\theta$: complex multiplication *is* planar rotation. Quaternions (Chapter 7) generalize this idea to three dimensions.

**Example 2.25** (Eigenvalues of a planar rotation)**.** For $R(\theta)$ of Example 2.16, $\operatorname{tr} R = 2\cos\theta$ and $\det R = 1$, so $p(\lambda) = \lambda^2 - 2\cos\theta\,\lambda + 1$ with roots $\lambda = \cos\theta \pm i\sin\theta = e^{\pm i\theta}$. Unless $\theta$ is a multiple of $\pi$, no real direction is merely stretched, as expected of a rotation.

### 2.8.3 Diagonalization

If $A \in \mathbb{R}^{n\times n}$ has $n$ independent eigenvectors $v_1, \dots, v_n$, collect them in $V = [v_1 \cdots v_n]$ and the eigenvalues in $\Lambda = \operatorname{diag}(\lambda_1, \dots, \lambda_n)$. The relations $Av_i = \lambda_i v_i$ read $AV = V\Lambda$, so

$$A = V\Lambda V^{-1}. \tag{2.29}$$

In the basis of eigenvectors, $A$ acts by independent scalings. Powers and polynomials become trivial, $A^k = V\Lambda^k V^{-1}$, and so do the power series used to define the matrix exponential (Chapter 3). Eigenvectors of distinct eigenvalues are always independent, so a matrix with $n$ distinct eigenvalues is diagonalizable. Not every matrix is: the shear $\begin{bmatrix} 1 & 1 \\ 0 & 1 \end{bmatrix}$ has the double eigenvalue 1 but only one eigenvector direction.

### 2.8.4 Every 3D rotation has an axis

**Theorem 2.26** (Euler's rotation theorem)**.** *Every $R \in \mathrm{SO}(3)$ has 1 as an eigenvalue. Its eigenvalues are $1, e^{i\theta}, e^{-i\theta}$ for some $\theta \in [0, \pi]$, and $\operatorname{tr} R = 1 + 2\cos\theta$. The real eigenvector $u$ of eigenvalue 1 is fixed by $R$: it is the* axis *of the rotation, and $R$ rotates the plane orthogonal to $u$ by the angle $\theta$.*

*Proof.* Using $R^\mathsf{T}R = I$ and $\det R = 1$: $\det(R - I) = \det\left(R(I - R^\mathsf{T})\right) = \det R \det\left((I - R)^\mathsf{T}\right) = \det(I - R) = (-1)^3 \det(R - I)$, so $\det(R - I) = 0$ and 1 is an eigenvalue. Every eigenvalue has modulus one, because $R$ preserves lengths (this holds for complex eigenvectors as well). The characteristic polynomial is real and of degree three, so non-real eigenvalues come in conjugate pairs; with one eigenvalue equal to 1 and the product of all three equal to $\det R = 1$, the other two are $e^{\pm i\theta}$, or both $+1$ or both $-1$. The trace formula is (2.27). Finally, $R$ maps the plane orthogonal to $u$ to itself (it preserves orthogonality to the fixed vector $u$), and it acts there as a planar rotation with eigenvalues $e^{\pm i\theta}$, i.e. by the angle $\theta$. ∎

This theorem is the reason a rotation can always be described by an axis and an angle, the representation from which all of rotation calculus is built (Chapters 7 and 8).

## 2.9 Symmetric matrices and quadratic forms

Covariance matrices, information matrices and the normal equations of least squares are all symmetric. Symmetric matrices have the most beautiful eigenstructure of all.

**Theorem 2.27** (Spectral theorem)**.** *A real symmetric matrix $A$ has real eigenvalues and an orthonormal basis of eigenvectors: $A = U\Lambda U^\mathsf{T}$ with $U$ orthogonal and $\Lambda$ real diagonal.*

*Proof. Real eigenvalues.* Let $Av = \lambda v$ with $v$ possibly complex and $\bar{v}$ its complex conjugate. The number $s = \bar{v}^\mathsf{T}Av$ equals $\lambda\,\bar{v}^\mathsf{T}v$. Its complex conjugate is $v^\mathsf{T}A\bar{v}$ (because $A$ is real),

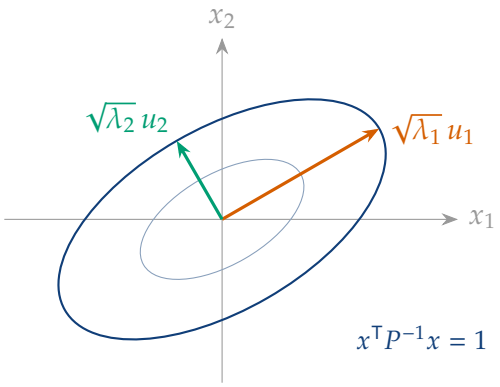



**Figure 2.4:** The level set $x^\mathsf{T}P^{-1}x = 1$ of a positive-definite $P = U\Lambda U^\mathsf{T}$ is an ellipse (ellipsoid) whose axes point along the eigenvectors $u_i$ and have semi-lengths $\sqrt{\lambda_i}$. For a covariance matrix this is the one-sigma uncertainty ellipse.

and a $1 \times 1$ matrix equals its own transpose, so $\bar{s} = \bar{v}^\mathsf{T}A^\mathsf{T}v = \bar{v}^\mathsf{T}Av = s$: $s$ is real. Since $\bar{v}^\mathsf{T}v = \sum_i |v_i|^2 > 0$, $\lambda = s/\bar{v}^\mathsf{T}v$ is real too. *Orthogonality.* If $Av = \lambda v$ and $Aw = \mu w$ with $\lambda \neq \mu$, then $\lambda\, w^\mathsf{T}v = w^\mathsf{T}Av = (Aw)^\mathsf{T}v = \mu\, w^\mathsf{T}v$, so $w^\mathsf{T}v = 0$. *Completeness* (sketch, by induction on $n$). Take a unit eigenvector $u_1$. The subspace $u_1^\perp$ is mapped into itself by $A$: if $x \perp u_1$ then $u_1^\mathsf{T}Ax = (Au_1)^\mathsf{T}x = \lambda_1 u_1^\mathsf{T}x = 0$. Restricted to this $(n-1)$-dimensional subspace, $A$ is again symmetric and, by induction, has an orthonormal eigenbasis, which together with $u_1$ is an orthonormal eigenbasis of $\mathbb{R}^n$. ∎

### 2.9.1 Quadratic forms and definiteness

A *quadratic form* is a function $x \mapsto x^\mathsf{T}Ax$ with $A$ symmetric. Substituting $x = Uy$, with $U$ from the spectral theorem, decouples it into independent squares:

$$x^\mathsf{T}Ax = y^\mathsf{T}\Lambda y = \sum_i \lambda_i y_i^2. \tag{2.30}$$

**Definition 2.28** (Definiteness). A symmetric matrix $A$ is *positive definite* (PD, $A \succ 0$) if $x^\mathsf{T}Ax > 0$ for every $x \neq 0$, and *positive semi-definite* (PSD, $A \succeq 0$) if $x^\mathsf{T}Ax \geq 0$ for every $x$. We write $A \succeq B$ (the *Loewner order*) when $A - B \succeq 0$.

By the decoupled form, $A \succ 0$ if and only if all its eigenvalues are positive, and $A \succeq 0$ if and only if they are non-negative. Other tests: all pivots of elimination are positive; the Cholesky factorization exists (Chapter 3); or all leading principal minors are positive (Sylvester's criterion).

**Ellipsoids.** For $P \succ 0$ the set $\{x : x^\mathsf{T}P^{-1}x \leq 1\}$ is an ellipsoid with principal axes along the eigenvectors of $P$ and semi-axis lengths $\sqrt{\lambda_i}$ (Figure 2.4): in the rotated coordinates $y = U^\mathsf{T}x$ it reads $\sum_i y_i^2/\lambda_i \leq 1$. When $P$ is a covariance matrix this is the uncertainty ellipsoid of Chapter 5, and the eigen-decomposition of $P$ tells in which directions the estimate is least certain.

**Proposition 2.29** (Properties of PSD matrices)**.** *Let $P, Q \succeq 0$ and let $A$ be any matrix of compatible size. Then*

1. *$APA^{\mathsf{T}} \succeq 0$ (a* congruence *preserves semi-definiteness);*
2. *$P + Q \succeq 0$, and $P + Q \succ 0$ if either is PD;*
3. *$P_{ii} \geq 0$ and $|P_{ij}| \leq \sqrt{P_{ii} P_{jj}}$;*
4. *every principal submatrix of $P$ is PSD.*

*Proof.* (1) $x^{\mathsf{T}} APA^{\mathsf{T}} x = (A^{\mathsf{T}} x)^{\mathsf{T}} P (A^{\mathsf{T}} x) \geq 0$. (2) is immediate. (4) follows from (1) with $A$ a selection matrix that picks some coordinates; (3) is (4) applied to $1 \times 1$ and $2 \times 2$ principal submatrices, whose determinants $P_{ii}P_{jj} - P_{ij}^2$ are non-negative. ∎

Property 1 explains why the covariance updates $\Phi P \Phi^{\mathsf{T}} + Q$ and the Joseph form (Chapter 12) preserve positive semi-definiteness exactly in exact arithmetic: they are sums of congruences of PSD matrices. The simpler update $(I - KH)P$ is not a congruence, which is why it can lose semi-definiteness under rounding.

**Proposition 2.30** (Rayleigh quotient)**.** *For symmetric $A$ with eigenvalues $\lambda_{\min} \leq \cdots \leq \lambda_{\max}$, $\lambda_{\min} \leq \dfrac{x^{\mathsf{T}} A x}{x^{\mathsf{T}} x} \leq \lambda_{\max}$ for every $x \neq 0$, with equality for the corresponding eigenvectors.*

*Proof.* With $y = U^{\mathsf{T}} x$, $x^{\mathsf{T}} A x / x^{\mathsf{T}} x = \sum_i \lambda_i y_i^2 / \sum_i y_i^2$, a weighted average of the eigenvalues. ∎

The Rayleigh quotient reappears in three places: minimizing $\|Ax\|^2$ over unit vectors (homogeneous least squares, Chapter 3), choosing good image features by the smallest eigenvalue of a structure tensor (Chapter 22), and bounding how much a matrix can amplify a vector (the matrix norm below).

## 2.10 Trace and norms

The trace is linear and invariant under cyclic permutations:

$$\operatorname{tr}(AB) = \operatorname{tr}(BA), \qquad \operatorname{tr}(ABC) = \operatorname{tr}(CAB) = \operatorname{tr}(BCA), \tag{2.31}$$

because $\operatorname{tr}(AB) = \sum_{i,j} A_{ij} B_{ji}$ is symmetric in the roles of $A$ and $B$. Consequently the trace is unchanged by a change of basis, $\operatorname{tr}(V^{-1} A V) = \operatorname{tr} A$, and equals the sum of the eigenvalues. A quadratic form can be written as a trace, $x^{\mathsf{T}} A x = \operatorname{tr}(A x x^{\mathsf{T}})$, which is how expected values of quadratic forms are computed: $\mathbb{E}[x^{\mathsf{T}} A x] = \operatorname{tr}(A\, \mathbb{E}[x x^{\mathsf{T}}])$ (Chapter 5).

Vector norms other than the Euclidean one are occasionally useful: $\|x\|_1 = \sum |x_i|$ and $\|x\|_\infty = \max |x_i|$. For matrices, the *Frobenius norm* $\|A\|_F = \sqrt{\sum_{ij} A_{ij}^2} = \sqrt{\operatorname{tr}(A^{\mathsf{T}} A)}$ treats the matrix as a long vector, and the *induced 2-norm* measures the largest amplification of a vector:

$$\|A\|_2 = \max_{x \neq 0} \frac{\|Ax\|}{\|x\|} = \sqrt{\lambda_{\max}(A^{\mathsf{T}} A)}, \tag{2.32}$$

the second equality being the Rayleigh quotient of $A^{\mathsf{T}} A$. It equals the largest singular value of $A$ (Chapter 3). Norms are how tolerances are expressed in tests: "$\|R^{\mathsf{T}} R - I\|_F < 10^{-12}$" is a precise statement that $R$ is numerically orthogonal.

**Key takeaways**

- A vector is a geometric object; its coordinates depend on the chosen basis (frame). In an orthonormal basis, coordinates are dot products.
- $a^\mathsf{T} b = \|a\|\|b\| \cos\theta$; projections split a vector into parallel and perpendicular parts.
- $[a]_\times b = a \times b = -[b]_\times a$, $[a]_\times^3 = -\|a\|^2 [a]_\times$ and $[Ra]_\times = R[a]_\times R^\mathsf{T}$ are the workhorses of rotation algebra.
- A matrix is a linear map; its columns are the images of the basis vectors; products compose maps right to left.
- Rank–nullity: $\dim \operatorname{null}(A) + \operatorname{rank} A = n$. The left nullspace is the orthogonal complement of the column space.
- Orthogonal matrices preserve geometry; those with determinant +1 are rotations. Every 3D rotation has an axis.
- Symmetric matrices have real eigenvalues and orthonormal eigenvectors; PD matrices define ellipsoids.

## Exercises

**2.1** Show that the set of $3 \times 3$ skew-symmetric matrices is a vector space of dimension three, and that the map $a \mapsto [a]_\times$ is linear and invertible.

**2.2** Decide whether $(1,2,3)$, $(4,5,6)$ and $(7,8,9)$ are independent. Find a non-trivial combination giving zero.

**2.3** Apply Gram–Schmidt to $(1,1,0)$, $(1,0,1)$, $(0,1,1)$.

**2.4** Prove (2.6) by checking it for $a, b, c$ chosen among $e_1, e_2, e_3$ and using linearity.

**2.5** Prove (2.13) directly from (2.12), and verify the Jacobi identity $a \times (b \times c) + b \times (c \times a) + c \times (a \times b) = 0$ numerically.

**2.6** Find the matrix of the reflection of $\mathbb{R}^3$ across the plane orthogonal to a unit vector $n$. Show that it is orthogonal with determinant $-1$.

**2.7** Show that the eigenvalues of $[a]_\times$ are $0$ and $\pm i\|a\|$. Which eigenvector belongs to 0?

**2.8** For $A = \begin{bmatrix} 2 & 1 \\ 1 & 2 \end{bmatrix}$, find the eigen-decomposition and sketch the ellipse $x^\mathsf{T} A^{-1} x = 1$.

**2.9** Let $H_f \in \mathbb{R}^{2M \times 3}$ have full column rank. What is the dimension of its left nullspace for $M = 2, 3, 10$?

**2.10** Prove that the rank of $ab^\mathsf{T}$ is one for non-zero $a, b$, and that every rank-one matrix has this form.

**2.11** Show that $\operatorname{tr}(A^\mathsf{T} B)$ is an inner product on matrices, and that $\|A\|_F^2 = \operatorname{tr}(A^\mathsf{T} A)$.

**2.12** Prove that the product of two rotation matrices is a rotation matrix, and that $R(\alpha)R(\beta) = R(\alpha + \beta)$ in the plane.

## Solutions to the exercises

**2.1** A $3 \times 3$ matrix $S$ is skew-symmetric when $S^{\mathsf{T}} = -S$. Sums and scalar multiples of skew-symmetric matrices are skew-symmetric, and the zero matrix is one, so they form a subspace of $\mathbb{R}^{3\times3}$. The condition forces $S_{ii} = 0$ and $S_{ji} = -S_{ij}$, so $S$ is determined by its three entries $S_{32}, S_{13}, S_{21}$, and these can be chosen freely: the subspace has dimension three, with basis $[e_1]_\times, [e_2]_\times, [e_3]_\times$. The map $a \mapsto [a]_\times$ is linear because each entry of $[a]_\times$ is a linear function of $a$, by (2.7). It is invertible because the vee map $S \mapsto (S_{32}, S_{13}, S_{21})$ undoes it: $[a]_\times^\vee = a$ and $[S^\vee]_\times = S$. A linear bijection between $\mathbb{R}^3$ and the skew-symmetric matrices confirms again that the dimension is three.

**2.2** They are dependent: $\det \begin{bmatrix} 1 & 4 & 7 \\ 2 & 5 & 8 \\ 3 & 6 & 9 \end{bmatrix} = 0$. Looking for $\alpha(1,2,3)+\beta(4,5,6)+\gamma(7,8,9) = 0$, the differences of consecutive vectors are both $(3,3,3)$, so $(4,5,6) - (1,2,3) = (7,8,9) - (4,5,6)$, that is

$$(1,2,3) - 2\,(4,5,6) + (7,8,9) = 0.$$

The three vectors lie in a plane through the origin, spanned for example by $(1,2,3)$ and $(1,1,1)$.

**2.3** With $a_1 = (1,1,0)$, $a_2 = (1,0,1)$, $a_3 = (0,1,1)$:

$$\begin{aligned} q_1 &= a_1/\|a_1\| = \tfrac{1}{\sqrt{2}}(1,1,0), \\ a_2 - (q_1^{\mathsf{T}} a_2) q_1 &= (1,0,1) - \tfrac{1}{2}(1,1,0) = \left(\tfrac{1}{2}, -\tfrac{1}{2}, 1\right), \qquad q_2 = \tfrac{1}{\sqrt{6}}(1,-1,2), \\ a_3 - (q_1^{\mathsf{T}} a_3) q_1 - (q_2^{\mathsf{T}} a_3) q_2 &= (0,1,1) - \tfrac{1}{2}(1,1,0) - \tfrac{1}{6}(1,-1,2) = \tfrac{2}{3}(-1,1,1), \\ q_3 &= \tfrac{1}{\sqrt{3}}(-1,1,1). \end{aligned}$$

Check: $q_1^{\mathsf{T}} q_2 = q_1^{\mathsf{T}} q_3 = q_2^{\mathsf{T}} q_3 = 0$, and each has unit length.

**2.4** Both sides of (2.6) are linear in each of $a$, $b$ and $c$, so it suffices to check them on basis vectors. Both sides are also antisymmetric in $(b, c)$ (swapping $b$ and $c$ flips $b \times c$, and turns $b(a^{\mathsf{T}}c) - c(a^{\mathsf{T}}b)$ into its negative), so both vanish when $b = c$, and the case $(b, c) = (e_2, e_1)$ follows from $(e_1, e_2)$. Relabelling the axes cyclically ($e_1 \to e_2 \to e_3 \to e_1$) preserves cross products, so it suffices to take $b = e_1$, $c = e_2$, $b \times c = e_3$, and $a \in \{e_1, e_2, e_3\}$:

$$\begin{aligned} a = e_1: &\quad e_1 \times e_3 = -e_2, &\quad & e_1(e_1^{\mathsf{T}} e_2) - e_2(e_1^{\mathsf{T}} e_1) = -e_2; \\ a = e_2: &\quad e_2 \times e_3 = e_1, &\quad & e_1(e_2^{\mathsf{T}} e_2) - e_2(e_2^{\mathsf{T}} e_1) = e_1; \\ a = e_3: &\quad e_3 \times e_3 = 0, &\quad & e_1(e_3^{\mathsf{T}} e_2) - e_2(e_3^{\mathsf{T}} e_1) = 0. \end{aligned}$$

**2.5** By (2.12), $[a]_\times[b]_\times = ba^{\mathsf{T}} - (a^{\mathsf{T}}b)I$ and $[b]_\times[a]_\times = ab^{\mathsf{T}} - (b^{\mathsf{T}}a)I$. The identity terms cancel in the difference, so $[a]_\times[b]_\times - [b]_\times[a]_\times = ba^{\mathsf{T}} - ab^{\mathsf{T}}$. Applied to any $c$, using (2.6),

$$(ba^{\mathsf{T}} - ab^{\mathsf{T}})\,c = b\,(a^{\mathsf{T}}c) - a\,(b^{\mathsf{T}}c) = -c \times (a \times b) = (a \times b) \times c = [a \times b]_\times\, c.$$

For the Jacobi identity, draw random vectors and evaluate the sum: in double precision it is about $10^{-16}$ (rounding level), for example

```
a, b, c = np.random.default_rng(0).normal(size=(3, 3))
r = np.cross(a, np.cross(b, c)) + np.cross(b, np.cross(c, a)) + np.cross(c, np.cross(a, b))
print(np.linalg.norm(r))      # 6.5e-17
```

It also follows algebraically from (2.6): the three terms are $b(a^\mathsf{T}c)-c(a^\mathsf{T}b)$, $c(b^\mathsf{T}a)-a(b^\mathsf{T}c)$ and $a(c^\mathsf{T}b)-b(c^\mathsf{T}a)$, which cancel in pairs.

**2.6** The reflection keeps the component of $x$ in the plane and flips the component along $n$, which is $nn^\mathsf{T}x$:

$$H = I - 2nn^\mathsf{T}.$$

$H$ is symmetric, and $H^\mathsf{T}H = H^2 = I - 4nn^\mathsf{T} + 4n(n^\mathsf{T}n)n^\mathsf{T} = I$ because $n^\mathsf{T}n = 1$, so $H$ is orthogonal. Its eigenvalues are $-1$ for the eigenvector $n$ and $+1$ for every vector in the plane (a two-dimensional eigenspace), so $\det H = (-1)(1)(1) = -1$: a reflection, not a rotation. (This is the Householder reflection of Chapter 3.)

**2.7** The characteristic polynomial of a $3\times 3$ matrix is $-\lambda^3 + (\operatorname{tr} S)\lambda^2 - m_2\lambda + \det S$, where $m_2$ is the sum of the three principal $2\times 2$ minors. For $S = [a]_\times$: $\operatorname{tr} S = 0$, $\det S = a^\mathsf{T}(a\times a) = 0$ (the triple product with a repeated vector), and $m_2 = a_1^2 + a_2^2 + a_3^2$. Hence $p(\lambda) = -\lambda(\lambda^2 + \|a\|^2)$, with roots $0$ and $\pm i\|a\|$. The eigenvector of $0$ is $a$ itself, since $[a]_\times a = a\times a = 0$. This matches the geometry of Chapter 7: $[a]_\times$ generates rotations about the axis $a$, which leave $a$ fixed, and acts on the plane orthogonal to $a$ as a $90^\circ$ rotation scaled by $\|a\|$.

**2.8** $\operatorname{tr} A = 4$ and $\det A = 3$, so $\lambda^2 - 4\lambda + 3 = 0$ gives $\lambda_1 = 3$, $\lambda_2 = 1$, with unit eigenvectors $u_1 = (1,1)/\sqrt{2}$ and $u_2 = (1,-1)/\sqrt{2}$. Thus

$$A = U\Lambda U^\mathsf{T}, \qquad U = \tfrac{1}{\sqrt{2}}\begin{bmatrix}1 & 1\\ 1 & -1\end{bmatrix}, \qquad \Lambda = \operatorname{diag}(3,1).$$

The ellipse $x^\mathsf{T}A^{-1}x = 1$ reads $y_1^2/3 + y_2^2/1 = 1$ in the coordinates $y = U^\mathsf{T}x$: its major semi-axis has length $\sqrt{3} \approx 1.73$ along the diagonal $(1,1)$, and its minor semi-axis has length $1$ along $(1,-1)$. It passes through $(\pm 1.22, \pm 1.22)$ on the diagonal and through $(\pm 0.71, \mp 0.71)$ on the anti-diagonal.

**2.9** By the rank–nullity theorem applied to $H_f^\mathsf{T}$ (Theorem 2.20), the left nullspace has dimension $2M - \operatorname{rank}(H_f) = 2M - 3$: one for $M = 2$, three for $M = 3$, and 17 for $M = 10$. These are the numbers of constraints on the poses that one feature contributes in the MSCKF (Chapter 26).

**2.10** The $j$-th column of $ab^\mathsf{T}$ is $b_j\, a$. Every column is a multiple of $a$, and since $b \neq 0$ at least one column is a non-zero multiple, so the column space is exactly $\operatorname{span}(a)$ and the rank is one. Conversely, if $M$ has rank one, its column space is a line $\operatorname{span}(a)$ with $a \neq 0$; each column is then $m_j = b_j\, a$ for some scalar $b_j$, which means $M = ab^\mathsf{T}$ with $b = (b_1, \ldots, b_n)$, and $b \neq 0$ because $M \neq 0$.

**2.11** $\operatorname{tr}(A^\mathsf{T}B) = \sum_j (A^\mathsf{T}B)_{jj} = \sum_j \sum_i A_{ij}B_{ij}$ is the ordinary dot product of the matrices viewed as long vectors of their entries. It is therefore symmetric, linear in each argument, and positive definite: $\operatorname{tr}(A^\mathsf{T}A) = \sum_{ij} A_{ij}^2 > 0$ unless $A = 0$. This is the definition of an inner

product, and the norm it induces is $\|A\|_F^2 = \operatorname{tr}(A^\mathsf{T}A) = \sum_{ij} A_{ij}^2$.

**2.12** If $R_1, R_2 \in \mathrm{SO}(3)$ then $(R_1R_2)^\mathsf{T}(R_1R_2) = R_2^\mathsf{T}R_1^\mathsf{T}R_1R_2 = R_2^\mathsf{T}R_2 = I$, and $\det(R_1R_2) = \det R_1 \det R_2 = 1$, so $R_1R_2 \in \mathrm{SO}(3)$. In the plane, multiplying out and using the angle-addition formulas,

$$R(\alpha)R(\beta) = \begin{bmatrix} c_\alpha c_\beta - s_\alpha s_\beta & -(c_\alpha s_\beta + s_\alpha c_\beta) \\ s_\alpha c_\beta + c_\alpha s_\beta & c_\alpha c_\beta - s_\alpha s_\beta \end{bmatrix} = \begin{bmatrix} \cos(\alpha+\beta) & -\sin(\alpha+\beta) \\ \sin(\alpha+\beta) & \cos(\alpha+\beta) \end{bmatrix} = R(\alpha+\beta).$$

In particular planar rotations commute; in three dimensions they do not (Chapter 7).

Chapter 3

# Numerical Linear Algebra

**In this chapter**

- Count the cost of matrix operations and understand why a filter must never form an explicit inverse.
- Derive the LU, Cholesky, QR and singular value decompositions, and know which one to use when.
- Solve least-squares problems stably, and compute nullspaces, projectors and pseudo-inverses.
- Use block matrices, Schur complements and the Woodbury identity fluently.
- Understand the matrix exponential, and why the exponential of a skew-symmetric matrix is a rotation.
- Understand floating-point arithmetic: rounding, cancellation, conditioning and stability.

Chapter 2 described what matrices *are*. This chapter is about computing with them reliably. A Kalman filter spends nearly all of its time in a few operations: multiplying matrices, solving linear systems with a covariance matrix, and factorizing Jacobians. Done naively, these operations are slow, lose accuracy, or silently destroy the symmetry and positive definiteness of covariances. Done well, they are fast and accurate to nearly machine precision.

## 3.1 The cost of matrix operations

Numerical analysts count *flops* (floating-point operations: one addition or multiplication each). Some basic costs for $n \times n$ matrices:

| Operation | Approximate flops |
|---|---|
| dot product of two $n$-vectors | $2n$ |
| matrix-vector product | $2n^2$ |
| matrix-matrix product | $2n^3$ |
| solving a triangular system | $n^2$ |
| LU factorization | $\frac{2}{3}n^3$ |
| Cholesky factorization | $\frac{1}{3}n^3$ |
| explicit inverse | $2n^3$ |

For the MSCKF with $n = 75$, a matrix product costs about $8 \times 10^5$ flops, a fraction of a millisecond. Costs grow with the cube of the dimension, which is why filters keep their state small, exploit block structure, and update only the blocks that change. We write $O(n^3)$ ("order $n^3$") to mean "at most a constant times $n^3$ for large $n$".

## 3.2 Triangular systems and the LU factorization

### 3.2.1 Forward and back substitution

A triangular system is solved by direct substitution. For an upper-triangular $U$ with non-zero diagonal, the last equation $U_{nn}x_n = b_n$ gives $x_n$, the previous one then gives $x_{n-1}$, and so on:

$$x_i = \frac{1}{U_{ii}}\Big(b_i - \sum_{j>i} U_{ij}x_j\Big), \qquad i = n, n-1, \dots, 1. \tag{3.1}$$

This is *back substitution*; *forward substitution* solves lower-triangular systems from the top. Each costs about $n^2$ flops. Every method in this chapter reduces a hard problem to one or two triangular solves.

### 3.2.2 LU factorization

Gaussian elimination (Section 2.5) subtracts multiples $\ell_{ik}$ of row $k$ from the rows below it, column by column, until the matrix is upper triangular. Recording the multipliers in a unit lower-triangular matrix $L$ gives the *LU factorization*

$$A = LU. \tag{3.2}$$

Then $Ax = b$ is solved by forward substitution $Ly = b$ and back substitution $Ux = y$. The factorization costs $\frac{2}{3}n^3$ flops once; every additional right-hand side costs only $2n^2$.

**Pivoting.** Elimination divides by the pivots. A tiny pivot creates huge multipliers that amplify rounding errors. The classic example is $\begin{bmatrix} 10^{-20} & 1 \\ 1 & 1 \end{bmatrix}$: eliminating with the pivot $10^{-20}$ gives a multiplier of $10^{20}$, and in double precision the computed solution of $Ax = (1, 2)$ is completely wrong, although the matrix is perfectly well conditioned. Swapping the two rows first fixes it. *Partial pivoting* always swaps the row with the largest available pivot into place, giving $PA = LU$ with a permutation matrix $P$. Symmetric positive-definite matrices, which is what filters mostly factor, need no pivoting at all, as the next section shows.

## 3.3 The Cholesky factorization

**Theorem 3.1** (Cholesky factorization). *A symmetric matrix $S$ is positive definite if and only if $S = LL^{\mathsf{T}}$ for a lower-triangular $L$ with positive diagonal. This $L$ is unique.*

*Proof.* If $S = LL^{\mathsf{T}}$ with $L$ invertible, then $x^{\mathsf{T}}Sx = \|L^{\mathsf{T}}x\|^2 > 0$ for $x \neq 0$. Conversely, partition

$$S = \begin{bmatrix} s_{11} & s^{\mathsf{T}} \\ s & S_{22} \end{bmatrix} = \begin{bmatrix} \ell_{11} & 0 \\ \ell & L_{22} \end{bmatrix} \begin{bmatrix} \ell_{11} & \ell^{\mathsf{T}} \\ 0 & L_{22}^{\mathsf{T}} \end{bmatrix} = \begin{bmatrix} \ell_{11}^2 & \ell_{11}\ell^{\mathsf{T}} \\ \ell_{11}\ell & \ell\ell^{\mathsf{T}} + L_{22}L_{22}^{\mathsf{T}} \end{bmatrix}.$$

Matching blocks: $\ell_{11} = \sqrt{s_{11}}$ (positive because $s_{11} = e_1^{\mathsf{T}}Se_1 > 0$), $\ell = s/\ell_{11}$, and $L_{22}L_{22}^{\mathsf{T}} = S_{22} - ss^{\mathsf{T}}/s_{11}$. The last matrix (a Schur complement, Section 3.8) is again positive definite,

so the construction continues recursively on a matrix one size smaller. Each step is forced, which proves uniqueness. ∎

Unrolling the recursion column by column gives the algorithm

$$L_{jj} = \Big(S_{jj} - \sum_{k<j} L_{jk}^2\Big)^{1/2}, \qquad L_{ij} = \frac{1}{L_{jj}}\Big(S_{ij} - \sum_{k<j} L_{ik}L_{jk}\Big), \quad i > j, \tag{3.3}$$

at a cost of $\frac{1}{3}n^3$ flops, half that of LU. The algorithm is backward stable without pivoting, and it fails (the argument of a square root is not positive) exactly when $S$ is not numerically positive definite, which makes it a useful diagnostic too. The variant $S = LDL^\mathsf{T}$, with unit-diagonal $L$ and diagonal $D$, avoids square roots; with symmetric pivoting (Eigen's `LDLT`) it also handles semi-definite and slightly indefinite matrices gracefully.

**Uses of the Cholesky factor.**

- *Solving* $Sx = b$: forward-substitute $Ly = b$, back-substitute $L^\mathsf{T}x = y$.
- *Whitening*: if a random vector $n$ has covariance $S = LL^\mathsf{T}$, then $L^{-1}n$ has covariance $I$ (Chapter 5). Mahalanobis distances are computed as $r^\mathsf{T}S^{-1}r = \|L^{-1}r\|^2$ with a single triangular solve.
- *Sampling*: if $s$ has covariance $I$, then $Ls$ has covariance $S$.
- *Determinants*: $\det S = \prod_i L_{ii}^2$, and $\log\det S = 2\sum_i \log L_{ii}$ without overflow.

## 3.4 Orthogonal factorizations: QR

Orthogonal transformations do not amplify errors (they preserve lengths), so factorizations built from them are the most stable available.

### 3.4.1 QR from Gram–Schmidt

Applying Gram–Schmidt to the columns $a_1, \dots, a_n$ of a full-column-rank $A \in \mathbb{R}^{m\times n}$ produces orthonormal $q_1, \dots, q_n$ with $a_k = \sum_{j\le k} r_{jk}q_j$, where $r_{jk} = q_j^\mathsf{T}a_k$ and $r_{kk} = \|\tilde{q}_k\|$. In matrix form

$$A = Q_1R_1, \qquad Q_1 = [q_1 \cdots q_n] \in \mathbb{R}^{m\times n}, \quad Q_1^\mathsf{T}Q_1 = I, \quad R_1 \text{ upper triangular.} \tag{3.4}$$

This is the *QR factorization*. Classical Gram–Schmidt, implemented literally, loses orthogonality in floating point when the columns are nearly dependent; the computed $q$'s drift away from being orthogonal. Householder reflections avoid this problem.

### 3.4.2 Householder reflections

**Definition 3.2** (Householder reflection). For a non-zero $v \in \mathbb{R}^m$, the matrix $H_v = I - 2\,\dfrac{vv^\mathsf{T}}{v^\mathsf{T}v}$ reflects vectors across the hyperplane orthogonal to $v$: it reverses the component along $v$ and leaves the orthogonal components unchanged. It is symmetric and orthogonal, and

is its own inverse: $H_v = H_v^\top = H_v^{-1}$.

**Proposition 3.3** (Zeroing a vector below its first entry). *For $x \in \mathbb{R}^m$ not a multiple of $e_1$, let $\alpha = -\operatorname{sign}(x_1)\|x\|$ and $v = x - \alpha e_1$. Then $H_v x = \alpha e_1$.*

*Proof.* Because $\|x\| = \|\alpha e_1\|$, the vectors $x$ and $\alpha e_1$ have the same length, so the reflection across the perpendicular bisector of the segment joining them swaps them. That bisecting hyperplane is orthogonal to $v = x - \alpha e_1$. Algebraically: $v^\top v = 2\|x\|^2 - 2\alpha x_1$ and $v^\top x = \|x\|^2 - \alpha x_1 = \tfrac{1}{2} v^\top v$, so $H_v x = x - 2v\,\frac{v^\top x}{v^\top v} = x - v = \alpha e_1$. ∎

The sign choice makes $v_1 = x_1 + \operatorname{sign}(x_1)\|x\|$ a sum of two numbers of the same sign, avoiding the cancellation that the other choice would suffer when $x$ is nearly parallel to $e_1$.

**Householder QR.** Apply a reflection $H_1$ that zeroes the first column of $A$ below the diagonal; then a reflection $H_2$, acting on rows $2, \dots, m$, that zeroes the second column below the diagonal; and so on for all $n$ columns:

$$H_n \cdots H_2 H_1 A = \begin{bmatrix} R_1 \\ 0 \end{bmatrix} \quad \Longleftrightarrow \quad A = Q \begin{bmatrix} R_1 \\ 0 \end{bmatrix} = \begin{bmatrix} Q_1 & Q_2 \end{bmatrix} \begin{bmatrix} R_1 \\ 0 \end{bmatrix} = Q_1 R_1, \tag{3.5}$$

with $Q = H_1 H_2 \cdots H_n$ orthogonal ($m \times m$), $R_1 \in \mathbb{R}^{n \times n}$ upper triangular, $Q_1 \in \mathbb{R}^{m \times n}$ and $Q_2 \in \mathbb{R}^{m \times (m-n)}$. The cost is about $2mn^2 - \frac{2}{3}n^3$ flops. The form $A = Q[R_1; 0]$ is the *full* QR factorization, and $A = Q_1 R_1$ the *thin* one.

**Applying $Q^\top$ without forming $Q$.** Each $H_k$ is determined by its vector $v_k$, so $Q^\top b = H_n \cdots H_1 b$ is computed by applying the reflections one at a time:

$$b \;\leftarrow\; b - v_k \frac{2\, v_k^\top b}{v_k^\top v_k}, \qquad k = 1, \dots, n, \tag{3.6}$$

at a cost of $O(m)$ per reflection. Forming $Q$ explicitly would cost $O(m^2 n)$ flops and $m^2$ storage.

**Proposition 3.4** (Nullspaces from QR). *If $A$ has full column rank $n$ and $A = Q_1 R_1$ as in (3.5), then the columns of $Q_1$ are an orthonormal basis of* range$(A)$ *and the columns of $Q_2$ are an orthonormal basis of the left nullspace* null$(A^\top)$. *In particular $Q_2^\top A = 0$.*

*Proof.* $Q^\top A = [R_1; 0]$, so $Q_2^\top A = 0$, i.e. the columns of $Q_2$ lie in null$(A^\top)$. They are orthonormal and there are $m - n$ of them, which is the dimension of null$(A^\top)$ by rank–nullity. Since $R_1$ is invertible, range$(A)$ = range$(Q_1)$. ∎

**Implementation note: never form $Q$**

Libraries store the Householder vectors compactly in the lower triangle of the factored matrix. In Eigen, `HouseholderQR::householderQ()` returns a lazy `HouseholderSequence` that can be applied to another matrix without materializing $Q$. This is exactly what the MSCKF needs: it applies the reflections that triangularize a feature Jacobian to the rest of the measurement equations (Chapter 26). Whether a particular call allocates must be

checked with the allocation guard, not assumed.

### 3.4.3 Givens rotations

A *Givens rotation* zeroes one entry at a time by rotating a pair of rows. To zero $b$ in the pair $(a, b)$, set $r = \sqrt{a^2 + b^2}$, $c = a/r$ and $s = b/r$:

$$\begin{bmatrix} c & s \\ -s & c \end{bmatrix} \begin{bmatrix} a \\ b \end{bmatrix} = \begin{bmatrix} r \\ 0 \end{bmatrix}. \tag{3.7}$$

Embedded in an identity matrix, it acts on two rows of a larger matrix and leaves the others untouched. Givens rotations are preferred when only a few entries need to be zeroed, when the matrix is sparse, or when rows arrive one at a time. The original MSCKF paper suggests them for its nullspace projection, because the feature Jacobian has a sparse block structure.

## 3.5 Least squares

### 3.5.1 The problem and the normal equations

An overdetermined system $Ax \approx b$, with $A \in \mathbb{R}^{m \times n}$, $m > n$, generally has no exact solution. The *least-squares* solution minimizes the squared residual

$$f(x) = \|Ax - b\|^2 = x^\mathsf{T} A^\mathsf{T} A x - 2x^\mathsf{T} A^\mathsf{T} b + b^\mathsf{T} b. \tag{3.8}$$

Setting the gradient $2A^\mathsf{T}Ax - 2A^\mathsf{T}b$ to zero gives the *normal equations*

$$A^\mathsf{T} A\, x = A^\mathsf{T} b. \tag{3.9}$$

If $A$ has full column rank, $A^\mathsf{T}A$ is positive definite (since $x^\mathsf{T}A^\mathsf{T}Ax = \|Ax\|^2 > 0$ for $x \neq 0$), so the solution is unique and is a minimum.

**Geometric meaning.** The normal equations say $A^\mathsf{T}(b - Ax) = 0$: the residual is orthogonal to every column of $A$. The fitted vector $Ax$ is the orthogonal projection of $b$ onto range$(A)$, the closest point to $b$ that the model can produce.

> **Definition 3.5** (Orthogonal projector)**.** A matrix $\Pi$ is an orthogonal projector if $\Pi^2 = \Pi$ and $\Pi^\mathsf{T} = \Pi$. If the columns of $Q$ are an orthonormal basis of a subspace $\mathcal{S}$, the projector onto $\mathcal{S}$ is $\Pi_\mathcal{S} = QQ^\mathsf{T}$. For $A$ of full column rank the projector onto range$(A)$ is $A(A^\mathsf{T}A)^{-1}A^\mathsf{T}$, and $I - \Pi$ projects onto the orthogonal complement.

Combining the two descriptions of the projector onto range$(A)$, and recalling that the columns of $Q_2$ in (3.5) span its complement null$(A^\mathsf{T})$, gives an identity we will use to prove the optimality of the MSCKF: for any $A_\perp$ whose columns are an orthonormal basis of the left nullspace of a full-column-rank $H_f$,

$$A_\perp A_\perp^\mathsf{T} = I - H_f (H_f^\mathsf{T} H_f)^{-1} H_f^\mathsf{T}. \tag{3.10}$$

### 3.5.2 Three ways to solve

**Cholesky on the normal equations.** Form $A^\mathsf{T}A$ ($mn^2$ flops) and factor it. This is the fastest method, but forming $A^\mathsf{T}A$ squares the condition number of the problem (Section 3.7): $\kappa(A^\mathsf{T}A) = \kappa(A)^2$. When $\kappa(A) = 10^8$, the normal equations lose essentially all sixteen significant digits.

**QR.** With $A = Q[R_1; 0]$ and the invariance of lengths under $Q^\mathsf{T}$,

$$\|Ax - b\|^2 = \|Q^\mathsf{T}(Ax - b)\|^2 = \|R_1 x - Q_1^\mathsf{T} b\|^2 + \|Q_2^\mathsf{T} b\|^2. \tag{3.11}$$

The second term does not depend on $x$, and the first vanishes for $x = R_1^{-1}Q_1^\mathsf{T}b$, computed by back substitution. The minimum residual is $\|Q_2^\mathsf{T}b\|$. This method works with the condition number of $A$ itself and is the standard choice.

**SVD.** The most robust and most expensive method, required when $A$ may be rank deficient (Section 3.6).

### 3.5.3 Weighted least squares

When the equations have different reliabilities, with errors of covariance $W$, the right objective weights each residual by its uncertainty (Chapter 9):

$$\min_x (Ax - b)^\mathsf{T} W^{-1} (Ax - b). \tag{3.12}$$

With $W = LL^\mathsf{T}$ this is ordinary least squares on the *whitened* system $L^{-1}Ax \approx L^{-1}b$, and the normal equations become $A^\mathsf{T}W^{-1}A\,x = A^\mathsf{T}W^{-1}b$.

## 3.6 The singular value decomposition

**Theorem 3.6** (Singular value decomposition). *Every $A \in \mathbb{R}^{m\times n}$ can be written as $A = U\Sigma V^\mathsf{T}$ with $U \in \mathbb{R}^{m\times m}$ and $V \in \mathbb{R}^{n\times n}$ orthogonal and $\Sigma \in \mathbb{R}^{m\times n}$ diagonal with entries $\sigma_1 \geq \sigma_2 \geq \cdots \geq 0$, the* singular values.

*Construction.* $A^\mathsf{T}A$ is symmetric and PSD, so by the spectral theorem $A^\mathsf{T}A = V\Lambda V^\mathsf{T}$ with orthonormal $v_i$ and eigenvalues $\lambda_1 \geq \cdots \geq \lambda_n \geq 0$. Set $\sigma_i = \sqrt{\lambda_i}$. For each $\sigma_i > 0$ define $u_i = Av_i/\sigma_i$. These are orthonormal: $u_i^\mathsf{T}u_j = v_i^\mathsf{T}A^\mathsf{T}Av_j/(\sigma_i\sigma_j) = \lambda_j v_i^\mathsf{T}v_j/(\sigma_i\sigma_j) = \delta_{ij}$. Complete them to an orthonormal basis $u_1, \ldots, u_m$ of $\mathbb{R}^m$. Then $Av_i = \sigma_i u_i$ for all $i$ (for $\sigma_i = 0$, $\|Av_i\|^2 = \lambda_i = 0$), which in matrix form is $AV = U\Sigma$. ∎

The SVD says that every linear map, in suitable orthonormal bases of its domain and codomain, is a pure scaling (Figure 3.1). It reveals everything about $A$ at once:

- the rank $r$ is the number of non-zero singular values;
- $u_1, \ldots, u_r$ span range($A$), $u_{r+1}, \ldots, u_m$ span null($A^\mathsf{T}$), $v_1, \ldots, v_r$ span range($A^\mathsf{T}$) and $v_{r+1}, \ldots, v_n$ span null($A$);

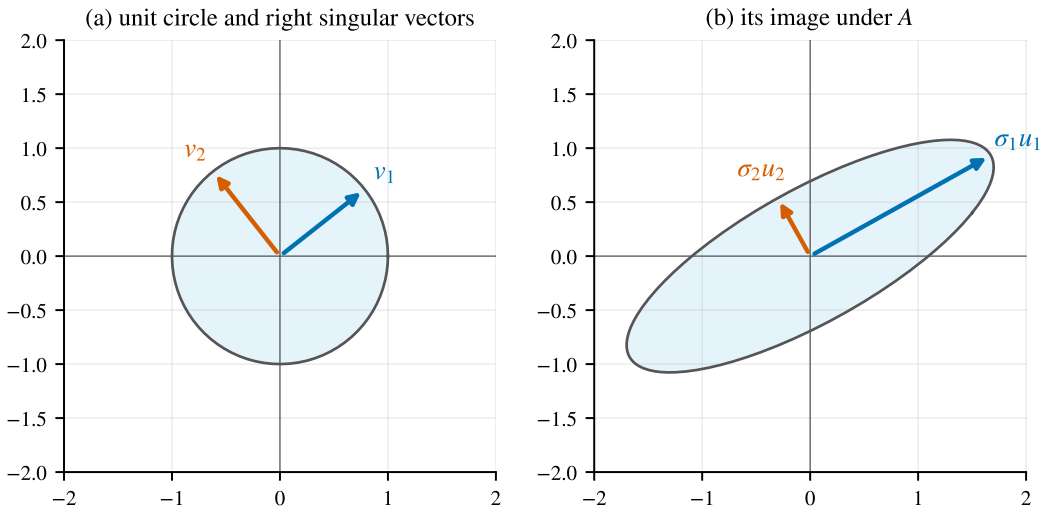



**Figure 3.1:** Geometry of the SVD of a $2 \times 2$ matrix. The right singular vectors $v_1, v_2$ (left) form an orthonormal basis that $A$ maps to orthogonal vectors $\sigma_1 u_1, \sigma_2 u_2$ (right). The unit circle becomes an ellipse with semi-axes $\sigma_1$ and $\sigma_2$: every linear map is a rotation, an axis-aligned scaling, and another rotation.

- $\|A\|_2 = \sigma_1$ and $\|A\|_F^2 = \sum_i \sigma_i^2$.

**Pseudo-inverse.** The *pseudo-inverse* $A^+ = V\Sigma^+ U^\mathsf{T}$, where $\Sigma^+$ inverts the non-zero singular values and transposes the shape, gives the minimum-norm least-squares solution $x = A^+ b$ of any system, including rank-deficient ones. For full column rank, $A^+ = (A^\mathsf{T} A)^{-1} A^\mathsf{T}$.

> **Proposition 3.7** (Homogeneous least squares)**.** *The unit vector $x$ minimizing $\|Ax\|$ is the right singular vector $v_n$ belonging to the smallest singular value, and the minimum is $\sigma_n$.*

*Proof.* $\|Ax\|^2 = x^\mathsf{T} A^\mathsf{T} A x$, and by the Rayleigh quotient (Proposition 2.30) its minimum over unit vectors is the smallest eigenvalue of $A^\mathsf{T} A$, $\sigma_n^2$, attained at the corresponding eigenvector $v_n$. ∎

Many geometric estimation problems have the form $Ax = 0$ with $x$ known only up to scale: estimating an essential matrix or a homography from correspondences, or triangulating a point in homogeneous coordinates (Chapter 23). With noisy data there is no exact solution, and Proposition 3.7 gives the best one.

> **Theorem 3.8** (Best low-rank approximation, Eckart–Young)**.** *Among all matrices of rank at most $k$, the one closest to $A$ in the Frobenius or 2-norm is $A_k = \sum_{i \le k} \sigma_i u_i v_i^\mathsf{T}$, obtained by zeroing all but the $k$ largest singular values.*

This is how an estimated matrix is projected onto a set defined by its singular values: for example, the nearest valid essential matrix to a noisy estimate is obtained by replacing its singular values by $(1, 1, 0)$ (Chapter 23).

## 3.7 Conditioning and stability

Two different things can make a computed answer inaccurate: the problem itself may be sensitive to its data, or the algorithm may add more error than necessary.

**Definition 3.9** (Condition number)**.** For an invertible (or full-column-rank) $A$, $\kappa(A) = \sigma_{\max}/\sigma_{\min} = \|A\|_2 \, \|A^{+}\|_2$.

**Proposition 3.10** (Sensitivity of linear systems)**.** *If $Ax = b$ and $A(x + \delta x) = b + \delta b$, then* $\dfrac{\|\delta x\|}{\|x\|} \le \kappa(A) \dfrac{\|\delta b\|}{\|b\|}$.

*Proof.* $\delta x = A^{-1}\delta b$ gives $\|\delta x\| \le \|A^{-1}\|\|\delta b\|$, and $b = Ax$ gives $\|b\| \le \|A\|\|x\|$. Multiply the two inequalities. ∎

A problem with condition number $\kappa$ can lose about $\log_{10}\kappa$ significant digits whatever the algorithm; it is *ill-conditioned* when $\kappa$ is large. An algorithm is *backward stable* if its computed answer is the exact answer to a problem whose data differ from the true data by a few units of rounding error; such an algorithm never loses more than the conditioning dictates. Householder QR, Cholesky on positive-definite matrices and LU with partial pivoting are backward stable in practice; classical Gram–Schmidt and the normal equations for ill-conditioned least squares are not. In geometric terms: triangulating a point seen with almost no parallax is an ill-conditioned problem that no algorithm can rescue (Chapter 23), while recovering the rotation angle from a rotation matrix with arccos is an unstable algorithm for a well-conditioned problem (Chapter 8).

**Pitfall: explicit inverses**

Formulas such as $K = PH^{\mathsf{T}}S^{-1}$ are notation, not algorithms. Computing $S^{-1}$ and then multiplying costs about three times as much as solving, is less accurate, and destroys structure. Factor $S$ once (Cholesky or LDL$^{\mathsf{T}}$) and solve: $SK^{\mathsf{T}} = HP^{\mathsf{T}}$ gives $K^{\mathsf{T}}$ by two triangular substitutions per column. Writing `S.ldlt().solve(Identity)` is still an explicit inverse in disguise.

## 3.8 Block matrices and the Schur complement

Estimation constantly partitions vectors and matrices into blocks: IMU state versus clones, poses versus landmarks. Block elimination is the basic tool.

**Proposition 3.11** (Block factorization and inverse)**.** *Let* $M = \begin{bmatrix} A & B \\ C & D \end{bmatrix}$ *with $A$ invertible, and define the* Schur complement *of $A$ in $M$, $M/A := D - CA^{-1}B$. Then*

$$M = \begin{bmatrix} I & 0 \\ CA^{-1} & I \end{bmatrix} \begin{bmatrix} A & 0 \\ 0 & M/A \end{bmatrix} \begin{bmatrix} I & A^{-1}B \\ 0 & I \end{bmatrix}, \qquad \det M = \det A \cdot \det(M/A), \tag{3.13}$$

*and if $M/A$ is invertible,*

$$M^{-1} = \begin{bmatrix} A^{-1} + A^{-1}B\,(M/A)^{-1}\,CA^{-1} & -A^{-1}B\,(M/A)^{-1} \\ -(M/A)^{-1}CA^{-1} & (M/A)^{-1} \end{bmatrix}. \tag{3.14}$$

*Proof.* Multiply out the three factors. The inverse is the product of the inverses of the three factors in reverse order, and the inverse of a unit block-triangular factor is obtained by negating its off-diagonal block. ∎

The Schur complement is what remains of the equations for the second block of unknowns after the first block has been eliminated. To see this, solve $\begin{bmatrix} A & B \\ C & D \end{bmatrix}\begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} f \\ g \end{bmatrix}$ by eliminating $x = A^{-1}(f - By)$ from the second equation: $(D - CA^{-1}B)\,y = g - CA^{-1}f$. For symmetric $M$ with $A \succ 0$, $M \succ 0$ if and only if $M/A \succ 0$. Chapter 5 shows that the Schur complement is exactly Gaussian conditioning in covariance form and marginalization in information form, and Chapter 10 uses it to eliminate landmarks from bundle adjustment.

**Theorem 3.12** (Woodbury matrix identity). *For invertible $A$ and $C$ and conformable $U, V$,*

$$(A + UCV)^{-1} = A^{-1} - A^{-1}U\big(C^{-1} + VA^{-1}U\big)^{-1}VA^{-1}. \tag{3.15}$$

*Proof.* Write the block matrix $M = \begin{bmatrix} A & U \\ V & -C^{-1} \end{bmatrix}$ and compute the top-left block of $M^{-1}$ in two ways with Proposition 3.11. Eliminating $A$ first gives $A^{-1} + A^{-1}U(-C^{-1} - VA^{-1}U)^{-1}VA^{-1}$, the right-hand side. Eliminating the bottom-right block $-C^{-1}$ first (the same proposition with the roles of the blocks exchanged) gives the inverse of its Schur complement, $(A - U(-C^{-1})^{-1}V)^{-1} = (A + UCV)^{-1}$. ∎

Woodbury connects the two forms of the Kalman update (Chapter 12). It says that a low-rank update of a matrix gives a low-rank update of its inverse, which is why an update with $m$ measurements needs only an $m \times m$ inverse no matter how large the state is. Its determinant counterpart is the *matrix determinant lemma* $\det(A + UCV) = \det(C^{-1} + VA^{-1}U)\det C \det A$.

## 3.9 The matrix exponential

**Definition 3.13** (Matrix exponential). For $A \in \mathbb{R}^{n\times n}$, $\exp(A) = \sum_{k=0}^{\infty} \frac{A^k}{k!} = I + A + \frac{1}{2}A^2 + \frac{1}{6}A^3 + \cdots$.

The series converges for every $A$: the norm of the $k$-th term is at most $\|A\|^k/k!$, and $\sum_k \|A\|^k/k! = e^{\|A\|}$ is finite.

**Proposition 3.14** (Properties of the matrix exponential).

1. $\frac{\mathrm{d}}{\mathrm{d}t}\exp(tA) = A\exp(tA) = \exp(tA)\,A$.
2. $x(t) = \exp(tA)\,x_0$ *is the unique solution of* $\dot{x} = Ax$, $x(0) = x_0$ *(Chapter 4).*
3. *If* $AB = BA$ *then* $\exp(A + B) = \exp(A)\exp(B)$. ***In general this fails.***
4. $\exp(A)^{-1} = \exp(-A)$, *and* $\exp(A^{\mathsf{T}}) = \exp(A)^{\mathsf{T}}$.
5. $\exp(TAT^{-1}) = T\exp(A)\,T^{-1}$ *for invertible* $T$.

6. $\det \exp(A) = e^{\operatorname{tr} A}$.

*Proof.* (1) Differentiate the series term by term: $\frac{\mathrm{d}}{\mathrm{d}t}\frac{t^k A^k}{k!} = A\frac{t^{k-1}A^{k-1}}{(k-1)!}$. (3) When $A$ and $B$ commute, the binomial theorem holds for $(A+B)^k$, and the Cauchy product of the two series reproduces the series of $\exp(A+B)$, exactly as for numbers. (4) $A$ and $-A$ commute, so $\exp(A)\exp(-A) = \exp(0) = I$; transposing the series term by term gives the second statement. (5) $(TAT^{-1})^k = TA^kT^{-1}$. (6) For diagonalizable $A = V\Lambda V^{-1}$, (5) gives $\exp(A) = V\exp(\Lambda)V^{-1}$ with $\exp(\Lambda) = \operatorname{diag}(e^{\lambda_i})$, so $\det\exp(A) = \prod_i e^{\lambda_i} = e^{\sum \lambda_i} = e^{\operatorname{tr} A}$; the general case follows by continuity, since diagonalizable matrices are dense. Statement (2) is proved in Chapter 4. ∎

The failure of property 3 for non-commuting matrices is the algebraic root of everything subtle about rotations: two rotations generated by $[a]_\times$ and $[b]_\times$ do not compose into the rotation generated by $[a+b]_\times$. Chapter 8 measures the discrepancy precisely.

**Proposition 3.15** (Exponentials of skew-symmetric matrices are rotations). *If $S^\mathsf{T} = -S$ then $\exp(S)$ is a rotation matrix.*

*Proof.* By property 4, $\exp(S)^\mathsf{T}\exp(S) = \exp(S^\mathsf{T})\exp(S) = \exp(-S)\exp(S) = I$, so $\exp(S)$ is orthogonal; and $\det\exp(S) = e^{\operatorname{tr} S} = e^0 = 1$ because a skew-symmetric matrix has a zero diagonal. ∎

This little proposition is the bridge between the flat world of vectors and the curved world of rotations: every vector $\phi \in \mathbb{R}^3$ defines the rotation $\exp([\phi]_\times)$, and Chapters 7 and 8 show that every rotation arises this way.

**Computing the exponential.**

- *Nilpotent matrices* ($A^k = 0$ for some $k$): the series is a finite sum.
- *Diagonalizable matrices*: $\exp(A) = V\operatorname{diag}(e^{\lambda_i})V^{-1}$.
- *Structured matrices*: when powers of $A$ repeat, as for skew-symmetric $3\times 3$ matrices, the series can be summed in closed form (Rodrigues' formula, Chapter 7).
- *General matrices*: *scaling and squaring*. Choose $s$ such that $\|A\|/2^s$ is small, approximate $\exp(A/2^s)$ by a truncated series or a rational (Padé) approximation, and square the result $s$ times, using $\exp(A) = \exp(A/2^s)^{2^s}$. This is what library routines such as `scipy.linalg.expm` do.

**Example 3.16** (Nilpotent generator: the double integrator). For $F = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$, $F^2 = 0$, so the series terminates: $\exp(F\Delta t) = \begin{bmatrix} 1 & \Delta t \\ 0 & 1 \end{bmatrix}$. This is the exact transition matrix of position and velocity under zero acceleration. The inertial error dynamics of Chapter 17 have a similar nilpotent structure, so their exponentials can be written in closed form.

## 3.10 Floating-point arithmetic

### 3.10.1 Representation

An IEEE 754 `double` represents a number as $\pm 1.f \times 2^e$, with a sign bit, an 11-bit exponent $e$ and a 52-bit fraction $f$ (53 significant bits counting the implicit leading one). Its range is about $10^{-308}$ to $10^{308}$; results beyond the range *overflow* to $\pm\infty$, and results below it *underflow* gradually to zero. Undefined operations such as $0/0$ or $\infty - \infty$ produce `NaN` ("not a number"), which propagates through every subsequent operation and compares unequal to everything, including itself. A single `NaN` in a covariance matrix contaminates the whole filter within one update.

### 3.10.2 Rounding

Two constants describe the precision:

- the *machine epsilon* $\varepsilon_{\text{mach}} = 2^{-52} \approx 2.22 \times 10^{-16}$, the gap between 1 and the next larger double (`std::numeric_limits<double>::epsilon()`);
- the *unit roundoff* $u = 2^{-53} \approx 1.11 \times 10^{-16}$: every basic operation satisfies $\mathrm{fl}(a \circ b) = (a \circ b)(1 + \delta)$ with $|\delta| \le u$.

The spacing between consecutive doubles is proportional to their magnitude: near $x$ it is about $\varepsilon_{\text{mach}}|x|$. Relative accuracy is therefore excellent for a single operation. Errors accumulate in long computations (a sum of $n$ terms can carry a relative error of order $nu$ in the worst case, though typically $\sqrt{n}\,u$), but the dramatic losses come from *cancellation*.

### 3.10.3 Cancellation

Subtracting two nearly equal numbers, each carrying a relative rounding error of size $u$, produces a small result whose *absolute* error is still of size $u$ times the operands, so its *relative* error can be enormous. The subtraction itself is exact; it merely exposes the errors already present.

> **Example 3.17** (Catastrophic cancellation in $1-\cos\theta$). For $\theta = 10^{-5}$, $\cos\theta = 1 - 5\times10^{-11} + \dots$. The stored value of $\cos\theta$ has an absolute error up to $u \approx 10^{-16}$, so $1 - \cos\theta \approx 5 \times 10^{-11}$ is computed with relative error up to $10^{-16}/(5 \times 10^{-11}) \approx 2 \times 10^{-6}$. Dividing by $\theta^2$ to form $(1-\cos\theta)/\theta^2 \approx 1/2$ keeps that relative error. At $\theta = 10^{-8}$, $\cos\theta$ rounds to exactly 1, and the computed value is 0 instead of $1/2$. The Taylor expansion $\frac{1}{2} - \frac{\theta^2}{24} + \cdots$ has no cancellation at all. Figure 8.2 in Chapter 8 shows this effect for all the coefficient functions of the rotation group.

The remedies are always the same: rewrite the expression to avoid the subtraction (for example $1-\cos\theta = 2\sin^2(\theta/2)$), use a series expansion in the dangerous regime, or reorganize the algorithm (for example `atan2` instead of `acos` for angles, Chapter 8).

**Pitfall: time stamps in floating point**

EuRoC timestamps are nanoseconds since the Unix epoch, about $1.4 \times 10^{18}$, which lies between $2^{60}$ and $2^{61}$. A `double` near that value can only represent multiples of $2^{60-52} = 256$ ns. Converting absolute timestamps to `double` therefore quantizes them to

256 ns, and accumulating time by repeated addition of $\Delta t$ drifts further. Keep absolute time in 64-bit integers (`std::chrono::nanoseconds`) and convert only differences to `double` (AGENTS.md C5).

**Key takeaways**

- Costs grow as $n^3$; exploit structure and update only what changes.
- Cholesky ($S = LL^\mathsf{T}$) is the factorization of choice for covariances: half the cost of LU, stable without pivoting, and a built-in test of positive definiteness.
- Householder QR is the stable way to solve least squares and to obtain orthonormal bases of a column space and of its complement, the left nullspace. Apply $Q^\mathsf{T}$ through its reflections; never form $Q$.
- The SVD reveals rank, nullspaces and conditioning, and solves homogeneous least squares $\min \|Ax\|$, $\|x\| = 1$.
- Schur complements eliminate variables; Woodbury converts between large and small inverses.
- $\exp(A + B) \neq \exp(A)\exp(B)$ unless $A$ and $B$ commute; the exponential of a skew-symmetric matrix is a rotation.
- Cancellation, not single operations, destroys floating-point accuracy. Time stamps belong in 64-bit integers.

## Exercises

**3.1** Solve $\begin{bmatrix} 10^{-20} & 1 \\ 1 & 1 \end{bmatrix} x = \begin{bmatrix} 1 \\ 2 \end{bmatrix}$ in double precision by elimination without pivoting and with partial pivoting. Explain the difference.

**3.2** Compute the Cholesky factor of $\begin{bmatrix} 4 & 2 & 2 \\ 2 & 5 & 3 \\ 2 & 3 & 6 \end{bmatrix}$ by hand and use it to solve $Sx = (8, 10, 11)$.

**3.3** Show that if $P \succ 0$ then $P - KSK^\mathsf{T} \succeq 0$ for $S = HPH^\mathsf{T} + R$, $K = PH^\mathsf{T}S^{-1}$ and $R \succ 0$. (Hint: the Schur complement of $\begin{bmatrix} S & HP \\ PH^\mathsf{T} & P \end{bmatrix}$.)

**3.4** Implement Householder QR in Python for a $10 \times 3$ matrix, check Proposition 3.4 numerically, and compare the accuracy of solving a least-squares problem with $\kappa(A) = 10^8$ by the normal equations and by QR.

**3.5** Prove (3.10) using a full QR factorization of $H_f$.

**3.6** Use Theorem 3.12 to show that $\left(P^{-1} + H^\mathsf{T}R^{-1}H\right)^{-1} = P - PH^\mathsf{T}(HPH^\mathsf{T} + R)^{-1}HP$. Which side is cheaper to evaluate when $P$ is $75 \times 75$ and $R$ is $2 \times 2$? When $R$ is $500 \times 500$?

**3.7** Compute $\exp\left(\begin{bmatrix} 0 & -\theta \\ \theta & 0 \end{bmatrix}\right)$ by summing the series, and recognize the result.

**3.8** Show that for $A = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$ and $B = \begin{bmatrix} 0 & 0 \\ 1 & 0 \end{bmatrix}$, $\exp(A + B) \neq \exp(A)\exp(B)$.

**3.9** What is the spacing of doubles near $2^{30}$ seconds expressed in nanoseconds? Would storing time as `double` seconds since the epoch be acceptable for a 200 Hz IMU?

**3.10** Rewrite $\sqrt{x^2 + 1} - x$ for large $x$ and $(1 - \cos x)/x^2$ for small $x$ so that they are computed accurately.

## Solutions to the exercises

**3.1** *Without pivoting* the multiplier is $\ell_{21} = 1/10^{-20} = 10^{20}$. The second row becomes

$$(1 - 10^{20})\, x_2 = 2 - 10^{20},$$

and in double precision both $1 - 10^{20}$ and $2 - 10^{20}$ round to $-10^{20}$: the information carried by the original entries 1 and 2 is lost. Hence $x_2 = 1$ and back substitution gives $x_1 = (1 - x_2)/10^{-20} = 0$. *With partial pivoting* the rows are swapped, the multiplier is $10^{-20}$, the second row becomes $(1-10^{-20})\, x_2 = 1-2\times10^{-20}$, which rounds to $x_2 = 1$, and $x_1 = 2 - x_2 = 1$. The exact solution is $x_1 = 1/(1-10^{-20})$, $x_2 = (1-2\times10^{-20})/(1-10^{-20})$, both equal to 1 to all printed digits. The matrix is well conditioned ($\kappa \approx 2.6$); the failure is entirely the algorithm's. A tiny pivot produces a huge multiplier, the elimination step adds huge numbers to small ones, and the rounding errors of that step are of the size of the huge numbers. Pivoting keeps every multiplier at most one in magnitude, which bounds this growth.

**3.2** Column by column with the formulas of Theorem 3.1: $L_{11} = \sqrt{4} = 2$, $L_{21} = 2/2 = 1$, $L_{31} = 2/2 = 1$; $L_{22} = \sqrt{5 - 1^2} = 2$, $L_{32} = (3 - 1\cdot 1)/2 = 1$; $L_{33} = \sqrt{6 - 1^2 - 1^2} = 2$. So

$$L = \begin{bmatrix} 2 & 0 & 0 \\ 1 & 2 & 0 \\ 1 & 1 & 2 \end{bmatrix}.$$

Forward substitution $Ly = (8, 10, 11)$ gives $y = (4, 3, 2)$, and back substitution $L^{\mathsf{T}}x = y$ gives $x_3 = 1$, $x_2 = (3 - 1)/2 = 1$, $x_1 = (4 - 1 - 1)/2 = 1$. Check: $S(1, 1, 1)^{\mathsf{T}} = (8, 10, 11)^{\mathsf{T}}$.

**3.3** The block matrix is a sum of PSD terms:

$$M = \begin{bmatrix} S & HP \\ PH^{\mathsf{T}} & P \end{bmatrix} = \begin{bmatrix} H \\ I \end{bmatrix} P \begin{bmatrix} H^{\mathsf{T}} & I \end{bmatrix} + \begin{bmatrix} R & 0 \\ 0 & 0 \end{bmatrix} \succeq 0,$$

the first a congruence of $P \succ 0$ and the second PSD because $R \succ 0$ (Proposition 2.29). Since $S = HPH^{\mathsf{T}} + R \succ 0$, the block factorization of Proposition 3.11 writes $M$ as a congruence of $\operatorname{diag}(S,\ M/S)$ by an invertible unit-triangular matrix, with $M/S = P - PH^{\mathsf{T}}S^{-1}HP$. A congruence by an invertible matrix preserves semi-definiteness in both directions, so $M \succeq 0$ implies $M/S \succeq 0$. Finally $KSK^{\mathsf{T}} = PH^{\mathsf{T}}S^{-1}SS^{-1}HP = PH^{\mathsf{T}}S^{-1}HP$, so $P - KSK^{\mathsf{T}} = M/S \succeq 0$. This is the statement that a Kalman update never increases uncertainty (Chapter 12).

**3.4** A compact implementation, storing each reflection and applying it to the remaining columns:

```
def householder_qr(A):
    A = A.astype(float).copy(); m, n = A.shape; vs = []
    for k in range(n):
        x = A[k:, k].copy()
        v = x.copy(); v[0] += np.copysign(np.linalg.norm(x), x[0])
        v /= np.linalg.norm(v)
        A[k:, k:] -= 2.0 * np.outer(v, v @ A[k:, k:])   # apply H_k
        vs.append(v)
```

```
    Q = np.eye(m)
    for k in reversed(range(n)):                    # Q = H_1 H_2 ... H_n
        Q[k:, :] -= 2.0 * np.outer(vs[k], vs[k] @ Q[k:, :])
    return Q, np.triu(A[:n, :])
```

For a random $10 \times 3$ matrix, $\|Q^\mathsf{T}Q - I\| \approx 10^{-15}$, $\|Q_1R_1 - A\| \approx 2 \times 10^{-15}$ and $\|Q_2^\mathsf{T}A\| \approx 5 \times 10^{-16}$: the last seven columns of $Q$ are an orthonormal basis of the left nullspace, as Proposition 3.4 states. For the least-squares test, build $A = U\,\mathrm{diag}(1, 10^{-4}, 10^{-8})V^\mathsf{T}$ with random orthonormal $U \in \mathbb{R}^{10\times3}$ and $V$, choose $x = (1, 2, 3)$ and $b = Ax$. A typical run gives a relative error of 0.14 for the normal equations and $3 \times 10^{-9}$ for QR. The normal equations work with $\kappa(A^\mathsf{T}A) = 10^{16}$ and lose all sixteen digits; QR works with $\kappa(A) = 10^8$ and keeps about eight, the most any algorithm can keep for this problem.

**3.5** Let $H_f = Q\begin{bmatrix} R_1 \\ 0 \end{bmatrix} = Q_1R_1$ with $Q = [Q_1\ Q_2]$ orthogonal and $R_1$ invertible (full column rank). Then

$$H_f(H_f^\mathsf{T}H_f)^{-1}H_f^\mathsf{T} = Q_1R_1\big(R_1^\mathsf{T}Q_1^\mathsf{T}Q_1R_1\big)^{-1}R_1^\mathsf{T}Q_1^\mathsf{T} = Q_1R_1R_1^{-1}R_1^{-\mathsf{T}}R_1^\mathsf{T}Q_1^\mathsf{T} = Q_1Q_1^\mathsf{T}.$$

Because $Q$ is orthogonal, $QQ^\mathsf{T} = Q_1Q_1^\mathsf{T} + Q_2Q_2^\mathsf{T} = I$, so $I - H_f(H_f^\mathsf{T}H_f)^{-1}H_f^\mathsf{T} = Q_2Q_2^\mathsf{T}$. Any other orthonormal basis $A_\perp$ of $\mathrm{null}(H_f^\mathsf{T}) = \mathrm{range}(Q_2)$ (Proposition 3.4) is $A_\perp = Q_2O$ for an orthogonal matrix $O$, hence $A_\perp A_\perp^\mathsf{T} = Q_2OO^\mathsf{T}Q_2^\mathsf{T} = Q_2Q_2^\mathsf{T}$, which proves (3.10).

**3.6** Apply Theorem 3.12 with $A = P^{-1}$, $U = H^\mathsf{T}$, $C = R^{-1}$, $V = H$:

$$\big(P^{-1} + H^\mathsf{T}R^{-1}H\big)^{-1} = P - PH^\mathsf{T}\big(R + HPH^\mathsf{T}\big)^{-1}HP.$$

With $n = 75$ states and $m$ measurements, the right side forms $PH^\mathsf{T}$ and $HPH^\mathsf{T}$ (about $2mn^2 + 2m^2n$ flops), factors the $m \times m$ matrix $S$ ($m^3/3$) and forms the product (about $2mn^2$); the left side needs $P^{-1}$, the product $H^\mathsf{T}R^{-1}H$ (about $mn^2$ for a diagonal $R$) and the inverse of an $n \times n$ matrix (two $n \times n$ inversions, about $2n^3 \approx 8 \times 10^5$ flops). For $m = 2$ the right side costs about $5 \times 10^4$ flops, some fifteen times less: this is why the Kalman filter is written in covariance form. For $m = 500$ the right side costs about $8 \times 10^7$ flops (dominated by $m^3/3$ and $2m^2n$), while the left side costs only about $4 \times 10^6$: with more measurements than states, the information form is cheaper. The MSCKF obtains the same saving without leaving the covariance form by compressing tall measurements with QR (Proposition 26.3).

**3.7** Let $J = \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}$, so the matrix is $\theta J$. Since $J^2 = -I$, the powers repeat with period four: $J^{2k} = (-1)^kI$ and $J^{2k+1} = (-1)^kJ$. Splitting the series into even and odd terms,

$$\exp(\theta J) = \sum_k \frac{(-1)^k\theta^{2k}}{(2k)!}I + \sum_k \frac{(-1)^k\theta^{2k+1}}{(2k+1)!}J = \cos\theta\, I + \sin\theta\, J = \begin{bmatrix} \cos\theta & -\sin\theta \\ \sin\theta & \cos\theta \end{bmatrix},$$

the planar rotation by $\theta$ (Example 2.16): the planar instance of Proposition 3.15.

**3.8** $A$ and $B$ are nilpotent ($A^2 = B^2 = 0$), so $\exp(A) = I + A = \begin{bmatrix} 1 & 1 \\ 0 & 1 \end{bmatrix}$ and $\exp(B) = \begin{bmatrix} 1 & 0 \\ 1 & 1 \end{bmatrix}$,

whose product is $\begin{bmatrix} 2 & 1 \\ 1 & 1 \end{bmatrix}$. On the other hand $C = A + B = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix}$ satisfies $C^2 = I$, so

$$\exp(A + B) = \cosh(1)\, I + \sinh(1)\, C = \begin{bmatrix} 1.543 & 1.175 \\ 1.175 & 1.543 \end{bmatrix} \neq \begin{bmatrix} 2 & 1 \\ 1 & 1 \end{bmatrix}.$$

The matrices do not commute: $AB = \operatorname{diag}(1, 0)$ while $BA = \operatorname{diag}(0, 1)$, so property 3 of Proposition 3.14 does not apply.

**3.9** Doubles in $[2^{30}, 2^{31})$ are spaced by $2^{30-52} = 2^{-22}$ s $\approx 238$ ns. Unix time today ($\approx 1.8{\times}10^9$ s) lies in that range. A single $\Delta t$ computed as a difference of two such numbers is wrong by up to about $10^{-7}$ s, a relative error of a few times $10^{-5}$ on a 5 ms step; at 1 rad/s that is an attitude error of $10^{-7}$ rad per step, well below the gyro noise per step ($\sigma_g \sqrt{\Delta t} \approx 10^{-5}$ rad). So differences would be tolerable, but the representation still fails the project's needs:

- it cannot hold EuRoC's nanosecond timestamps exactly, so equal timestamps may compare unequal and event ordering may change;
- *accumulating* time is disastrous: adding 0.005 to a double near $1.79 \times 10^9$ rounds the same way at every step, and one hour at 200 Hz (720 000 additions) drifts by 82 ms in a simulation.

Absolute time therefore stays in 64-bit integer nanoseconds, and only differences are converted (AGENTS.md C5).

**3.10** Multiply and divide by the conjugate:

$$\sqrt{x^2 + 1} - x = \frac{1}{\sqrt{x^2 + 1} + x},$$

which adds two positive numbers instead of subtracting nearly equal ones. At $x = 10^8$ the original form returns exactly 0 (because $x^2 + 1$ rounds to $x^2$), the rewritten one $5 \times 10^{-9} \approx 1/(2x)$. Using `hypot(x, 1)` for the square root also avoids overflow of $x^2$ for $|x| > 10^{154}$. For the second expression use $1 - \cos x = 2\sin^2(x/2)$:

$$\frac{1 - \cos x}{x^2} = \frac{1}{2}\left(\frac{\sin(x/2)}{x/2}\right)^2,$$

which involves no subtraction (and $\sin(y)/y$ is accurate for small $y$, or can be replaced by its series $1 - y^2/6$). At $x = 10^{-8}$ the original form returns 0 and the rewritten one 0.5; at $x = 10^{-5}$ the original is wrong in the eighth digit (Example 3.17).

Chapter 4

# Calculus, Differential Equations and Numerical Integration

**In this chapter**

- Use partial derivatives, gradients, Jacobians and Hessians, and the chain rule in matrix form.
- Use Taylor's theorem with explicit error terms; this is what "linearization" and "first order" mean.
- Differentiate common matrix expressions: inverses, quadratic forms, determinants.
- Solve linear ordinary differential equations, including time-varying ones, with the state transition matrix.
- Integrate differential equations numerically, predict the order of the error, and verify it.
- Compute derivatives numerically with a step size chosen from first principles.

A navigation filter is a differential equation (the vehicle's motion) integrated numerically from noisy derivatives (the IMU readings), corrected with linearized measurement models. This chapter collects the calculus behind those three activities: derivatives and linearization, differential equations and their solutions, and the numerical methods that approximate both.

## 4.1 Derivatives of functions of several variables

### 4.1.1 Partial derivatives, gradients and Jacobians

For a scalar function $f(x_1, \dots, x_n)$, the *partial derivative* $\partial f / \partial x_j$ is the ordinary derivative with respect to $x_j$ with the other variables held fixed. The *gradient* collects them: $\nabla f = (\partial f/\partial x_1, \dots, \partial f/\partial x_n)^\mathsf{T}$. For a vector function $f : \mathbb{R}^n \to \mathbb{R}^m$ the partial derivatives form the *Jacobian* matrix.

**Definition 4.1** (Jacobian, numerator layout)**.** For $f : \mathbb{R}^n \to \mathbb{R}^m$, the Jacobian $\frac{\partial f}{\partial x} \in \mathbb{R}^{m \times n}$ has entries $\left[\frac{\partial f}{\partial x}\right]_{ij} = \frac{\partial f_i}{\partial x_j}$. Row $i$ is the gradient of the $i$-th output (transposed); column $j$ is the sensitivity of all outputs to the $j$-th input.

The Jacobian is the matrix of the best linear approximation of $f$ near $x$:

$$f(x + \delta) = f(x) + \frac{\partial f}{\partial x}\,\delta + o(\|\delta\|), \tag{4.1}$$

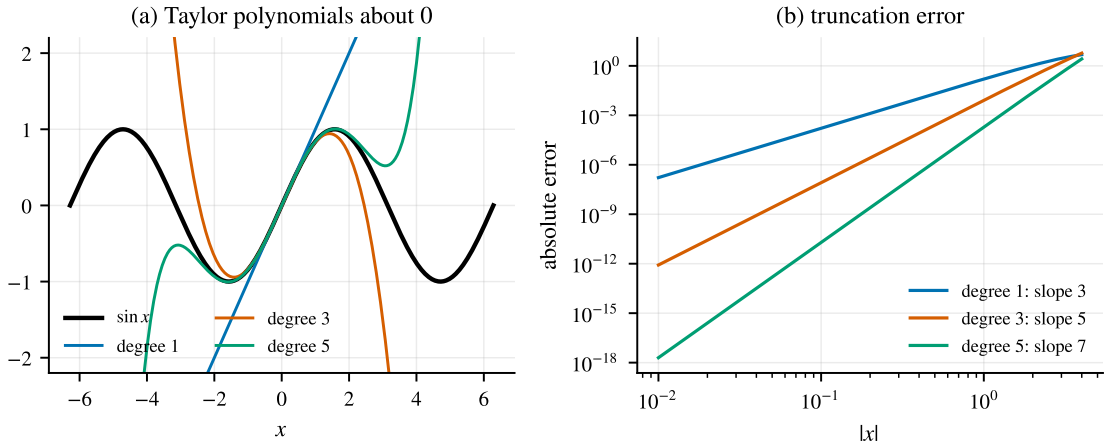



**Figure 4.1:** Taylor polynomials of $\sin x$ about 0 (left) and the absolute error of each (right, log-log scale). Near the expansion point the error of the degree-$n$ polynomial falls like $|x|^{n+1}$ or faster. Because the even-order terms of $\sin x$ vanish, the polynomials of degree 1, 3 and 5 coincide with those of degree 2, 4 and 6, and their errors fall like $|x|^3$, $|x|^5$ and $|x|^7$ (slopes 3, 5 and 7). Far from the expansion point, every truncated series fails.

where $o(\|\delta\|)$ denotes a remainder that goes to zero faster than $\|\delta\|$. Column $j$ is exactly what a finite-difference test computes by perturbing the $j$-th input (Section 4.4).

**Proposition 4.2** (Chain rule). *If $y = f(x)$ and $z = g(y)$, then* $\dfrac{\partial z}{\partial x} = \dfrac{\partial g}{\partial y}\Big|_{y=f(x)} \dfrac{\partial f}{\partial x}$.

*Proof.* Substitute the linear approximation of $f$ into that of $g$: $g(f(x+\delta)) = g\big(f(x) + J_f\delta + o(\|\delta\|)\big) = g(f(x)) + J_g J_f \delta + o(\|\delta\|)$. ∎

With the numerator layout the factors appear in the same order as the composition $g \circ f$, which makes long chains easy to write: the Jacobian of a camera measurement with respect to a pose is "(projection) times (frame change) times (pose perturbation)" (Chapter 26).

The *Hessian* of a scalar function is the matrix of second derivatives, $[\nabla^2 f]_{ij} = \partial^2 f / \partial x_i \partial x_j$. For smooth $f$ it is symmetric. It describes curvature: the second-order behavior of $f$ near a point.

### 4.1.2 Taylor's theorem

**Theorem 4.3** (Taylor's theorem in one variable). *If $f$ has $n+1$ continuous derivatives, then*

$$f(x+h) = \sum_{k=0}^{n} \frac{f^{(k)}(x)}{k!} h^k + \frac{f^{(n+1)}(\xi)}{(n+1)!} h^{n+1} \tag{4.2}$$

*for some $\xi$ between $x$ and $x+h$ (Lagrange form of the remainder).*

The theorem says more than "$f$ is close to its Taylor polynomial": it bounds the error. If $|f^{(n+1)}| \le M$ on the interval, the error of the degree-$n$ polynomial is at most $Mh^{n+1}/(n+1)!$. This is how we will judge every approximation in these notes.

**Big-O and little-o.** We write $g(h) = O(h^p)$ if $|g(h)| \le C h^p$ for some constant $C$ as $h \to 0$, and $g(h) = o(h^p)$ if $g(h)/h^p \to 0$. An approximation is *first-order accurate* if its error is $O(h^2)$: the error of a linearization shrinks quadratically with the size of the perturbation. "Keeping terms to first order" in a derivation means writing the result as linear terms plus an $O(\|\delta\|^2)$ remainder, and then dropping the remainder.

For functions of several variables, Taylor's theorem to second order reads

$$f(x+\delta) = f(x) + \nabla f(x)^{\mathsf{T}}\delta + \tfrac{1}{2}\delta^{\mathsf{T}}\nabla^2 f(x)\,\delta + O(\|\delta\|^3), \tag{4.3}$$

and for vector functions each component expands this way. The size of the second-order term relative to the first measures how good a linearization is: when uncertainties are small compared with the scale over which the Jacobian changes, linearization is accurate. This is the quantitative content of the statement that an extended Kalman filter works well when errors are small (Chapter 13).

### 4.1.3 Matrix calculus

A few derivatives recur throughout estimation. We write them as differentials ($\mathrm{d}f$ = the linear change of $f$ for a small change of the argument):

$$\mathrm{d}(Ax) = A\,\mathrm{d}x, \qquad \frac{\partial (Ax)}{\partial x} = A, \tag{4.4}$$

$$\mathrm{d}(x^{\mathsf{T}}Ax) = x^{\mathsf{T}}(A + A^{\mathsf{T}})\,\mathrm{d}x, \qquad \nabla_x (x^{\mathsf{T}}Ax) = (A + A^{\mathsf{T}})x \;\; (= 2Ax \text{ if } A \text{ symmetric}), \tag{4.5}$$

$$\mathrm{d}(a \times x) = [a]_\times\,\mathrm{d}x, \qquad \mathrm{d}(x \times a) = -[a]_\times\,\mathrm{d}x, \tag{4.6}$$

$$\mathrm{d}(A^{-1}) = -A^{-1}(\mathrm{d}A)A^{-1}, \qquad \mathrm{d}\log\det A = \operatorname{tr}(A^{-1}\mathrm{d}A). \tag{4.7}$$

*Derivations.* The first and third lines are linear maps, their own derivatives. For the quadratic form, $(x+\mathrm{d}x)^{\mathsf{T}}A(x+\mathrm{d}x) - x^{\mathsf{T}}Ax = \mathrm{d}x^{\mathsf{T}}Ax + x^{\mathsf{T}}A\,\mathrm{d}x + O(\|\mathrm{d}x\|^2) = x^{\mathsf{T}}(A^{\mathsf{T}} + A)\mathrm{d}x + O(\|\mathrm{d}x\|^2)$. For the inverse, differentiate $AA^{-1} = I$: $(\mathrm{d}A)A^{-1} + A\,\mathrm{d}(A^{-1}) = 0$. For the log-determinant of a positive-definite $A = U\Lambda U^{\mathsf{T}}$, a small change $\mathrm{d}A$ changes each eigenvalue by $u_i^{\mathsf{T}}(\mathrm{d}A)u_i$ to first order, so $\mathrm{d}\sum_i \log\lambda_i = \sum_i u_i^{\mathsf{T}}(\mathrm{d}A)u_i/\lambda_i = \operatorname{tr}(U\Lambda^{-1}U^{\mathsf{T}}\mathrm{d}A) = \operatorname{tr}(A^{-1}\mathrm{d}A)$. ∎

### 4.1.4 Stationary points

A smooth function has a local minimum at $x^\star$ only if $\nabla f(x^\star) = 0$, and it does have one if, in addition, $\nabla^2 f(x^\star) \succ 0$: by the second-order Taylor expansion, $f(x^\star+\delta) - f(x^\star) = \tfrac{1}{2}\delta^{\mathsf{T}}\nabla^2 f\,\delta + O(\|\delta\|^3) > 0$ for small $\delta \neq 0$. Every least-squares problem in these notes is solved by setting a gradient to zero; Chapter 10 develops the iterative methods needed when the resulting equations are nonlinear.

## 4.2 Ordinary differential equations

### 4.2.1 What a differential equation is

An *ordinary differential equation* (ODE) in state-space form is

$$\dot{x}(t) = f\big(x(t), t\big), \qquad x(t_0) = x_0, \tag{4.8}$$

where $x(t) \in \mathbb{R}^n$ is the *state* and $\dot{x} = \mathrm{d}x/\mathrm{d}t$. Any higher-order equation can be put in this form by adding derivatives to the state: Newton's law $\ddot{p} = a$ becomes the first-order system $\dot{p} = v$, $\dot{v} = a$ with state $(p, v)$. The kinematics of a navigating vehicle are exactly such a system, with the IMU supplying the right-hand side.

**Theorem 4.4** (Existence and uniqueness, Picard–Lindelöf)**.** *If $f$ is continuous in $t$ and Lipschitz continuous in $x$ (there is an $L$ with $\|f(x,t) - f(y,t)\| \le L\|x - y\|$), the initial value problem has a unique solution on some interval around $t_0$.*

Uniqueness is what makes prediction possible: the present state and the inputs determine the future. All the systems in these notes are smooth enough for the theorem to apply. (A non-example is $\dot{x} = \sqrt{|x|}$, $x(0) = 0$, solved both by $x \equiv 0$ and by $x = t^2/4$.)

### 4.2.2 Scalar linear equations

The scalar equation $\dot{x} = ax + b(t)$ is solved with an *integrating factor*. Multiplying by $e^{-at}$ gives $\frac{\mathrm{d}}{\mathrm{d}t}\big(e^{-at}x\big) = e^{-at}b(t)$; integrating from $t_0$ to $t$,

$$x(t) = e^{a(t-t_0)}x_0 + \int_{t_0}^{t} e^{a(t-s)}\, b(s)\, \mathrm{d}s. \tag{4.9}$$

The solution is the free response of the initial condition plus a weighted sum of the inputs, each propagated from the time it was applied. Every linear system has this structure.

### 4.2.3 Linear time-invariant systems

**Theorem 4.5** (Solution of linear time-invariant systems)**.** *The solution of $\dot{x} = Ax + Bu(t)$, $x(t_0) = x_0$, is*

$$x(t) = e^{A(t-t_0)}x_0 + \int_{t_0}^{t} e^{A(t-s)}Bu(s)\, \mathrm{d}s. \tag{4.10}$$

*In particular $\dot{x} = Ax$ has the unique solution $x(t) = e^{A(t-t_0)}x_0$.*

*Proof.* By Proposition 3.14, $\frac{\mathrm{d}}{\mathrm{d}t}\big(e^{-At}x\big) = e^{-At}(\dot{x} - Ax) = e^{-At}Bu$. Integrating from $t_0$ to $t$ and multiplying by $e^{At}$ gives (4.10). The same computation shows that *any* solution satisfies (4.10), which proves uniqueness. ∎

The matrix $e^{A\Delta t}$ propagates the state over an interval $\Delta t$. If $A = V\Lambda V^{-1}$, the solution is a combination of modes $e^{\lambda_i t}$: decaying for $\operatorname{Re}\lambda_i < 0$, growing for $\operatorname{Re}\lambda_i > 0$, oscillating for imaginary parts. Error dynamics of inertial navigation have eigenvalues at zero, so their errors grow polynomially rather than exponentially (Chapter 17).

### 4.2.4 Linear time-varying systems and the state transition matrix

When the system matrix changes with time, $\dot{x} = A(t)x$, the exponential no longer applies directly, but its key property survives.

**Definition 4.6** (State transition matrix)**.** The *state transition matrix* $\Phi(t, s)$ of $\dot{x} = A(t)x$ is the solution of the matrix equation $\frac{\partial}{\partial t}\Phi(t, s) = A(t)\Phi(t, s)$ with $\Phi(s, s) = I$.

**Proposition 4.7** (Properties of the state transition matrix)**.**

1. $x(t) = \Phi(t, s)\, x(s)$ *for every solution:* $\Phi$ *maps states at time* $s$ *to states at time* $t$.
2. $\Phi(t, s)\,\Phi(s, r) = \Phi(t, r)$ *(the semigroup property) and* $\Phi(t, s)^{-1} = \Phi(s, t)$.
3. *For constant* $A$, $\Phi(t, s) = e^{A(t-s)}$.
4. *If* $A(t)$ *commutes with* $A(s)$ *for all* $t, s$*, then* $\Phi(t, s) = \exp\left(\int_s^t A(\tau)\,\mathrm{d}\tau\right)$*. In general this formula is* wrong.
5. *The solution of* $\dot{x} = A(t)x + B(t)u(t)$ *is* $x(t) = \Phi(t, t_0)x_0 + \int_{t_0}^{t} \Phi(t, s)B(s)u(s)\,\mathrm{d}s$.

*Proof.* (1) Both $x(t)$ and $\Phi(t, s)x(s)$ solve the ODE with the same value at $t = s$; by uniqueness they agree. (2) Both sides of the first identity, as functions of $t$, solve the matrix ODE with the value $\Phi(s, r)$ at $t = s$. Setting $r = t$ gives the second. (3) Check that $e^{A(t-s)}$ satisfies the definition. (4) If the $A(\tau)$ commute, so do $A(t)$ and $M(t) = \int_s^t A$, and then $\frac{\mathrm{d}}{\mathrm{d}t}e^{M(t)} = A(t)e^{M(t)}$ by the commuting case of the series; without commutativity this derivative formula fails. (5) Differentiate the right-hand side and use (1) and $\frac{\partial}{\partial t}\Phi = A\Phi$. ∎

Property 4 matters for attitude. The kinematics $\dot{R} = R[\omega(t)]_\times$ is a linear matrix ODE, and when the angular velocity changes direction over time the rotation is *not* $\exp\left(\int [\omega]_\times\right)$: rotations about different axes do not commute. Integrating the angular velocity vector and exponentiating the result produces the "coning" error of Chapter 16.

A general series for $\Phi$, the *Peano–Baker series*

$$\Phi(t, s) = I + \int_s^t A(\tau_1)\,\mathrm{d}\tau_1 + \int_s^t \int_s^{\tau_1} A(\tau_1)A(\tau_2)\,\mathrm{d}\tau_2\,\mathrm{d}\tau_1 + \cdots,$$

obtained by repeatedly substituting the integral form of the ODE into itself, shows how products of non-commuting matrices enter. In practice $\Phi$ is approximated over short intervals, where $A$ is nearly constant: $\Phi(t + \Delta t, t) \approx \exp(A(t)\Delta t) \approx I + A(t)\Delta t$, the discretization used by every filter in these notes.

## 4.3 Numerical integration of ODEs

### 4.3.1 Euler's method

Truncating the Taylor expansion $x(t + h) = x(t) + h\dot{x}(t) + O(h^2)$ gives *Euler's method*:

$$x_{k+1} = x_k + h\, f(x_k, t_k). \tag{4.11}$$

Each step makes a *local truncation error* of $O(h^2)$. Over a fixed interval $T$ there are $T/h$ steps, so one expects a *global error* of $O(h)$. The following proposition makes this precise; it also explains why local errors do not simply add up, but can be amplified by the dynamics.

**Proposition 4.8** (Global error of Euler's method)**.** *If $f$ is Lipschitz with constant $L$ and the exact solution has a bounded second derivative $\|\ddot{x}\| \le M$, the error $e_k = x_k - x(t_k)$ of Euler's method satisfies $\|e_k\| \le \frac{Mh}{2L}\big(e^{L(t_k - t_0)} - 1\big)$.*

*Proof.* The exact solution satisfies $x(t_{k+1}) = x(t_k) + h f(x(t_k)) + \tau_k$ with $\|\tau_k\| \le Mh^2/2$ by Taylor's theorem. Subtracting from the numerical step, $e_{k+1} = e_k + h\big(f(x_k) - f(x(t_k))\big) - \tau_k$, so $\|e_{k+1}\| \le (1 + hL)\|e_k\| + Mh^2/2$. With $e_0 = 0$, induction gives $\|e_k\| \le \frac{Mh^2}{2}\sum_{j<k}(1+hL)^j = \frac{Mh}{2L}\big((1+hL)^k - 1\big) \le \frac{Mh}{2L}\big(e^{Lkh} - 1\big)$. ∎

**Definition 4.9** (Order of a method)**.** A method has *order* $p$ if its global error over a fixed interval is $O(h^p)$; equivalently its local error is $O(h^{p+1})$.

### 4.3.2 Higher-order methods

*Runge–Kutta* methods evaluate $f$ at several points inside the step and combine the results so that the Taylor expansion of the step matches the true solution to higher order.

- **Midpoint method** (order 2): $k_1 = f(x_k, t_k)$, $x_{k+1} = x_k + h f(x_k + \tfrac{h}{2}k_1, t_k + \tfrac{h}{2})$.
- **Heun's method / trapezoidal rule** (order 2): $k_1 = f(x_k, t_k)$, $k_2 = f(x_k + hk_1, t_k + h)$, $x_{k+1} = x_k + \tfrac{h}{2}(k_1 + k_2)$.
- **Classical RK4** (order 4): $k_1 = f(x_k, t_k)$, $k_2 = f(x_k + \tfrac{h}{2}k_1, t_k + \tfrac{h}{2})$, $k_3 = f(x_k + \tfrac{h}{2}k_2, t_k + \tfrac{h}{2})$, $k_4 = f(x_k + hk_3, t_k + h)$, $x_{k+1} = x_k + \tfrac{h}{6}(k_1 + 2k_2 + 2k_3 + k_4)$.

Verifying the order means expanding both the numerical step and the exact solution in Taylor series and comparing coefficients. For Heun's method on $\dot{x} = f(x)$: $k_2 = f(x + hf) = f + hf'f + O(h^2)$, so the step is $x + hf + \frac{h^2}{2}f'f + O(h^3)$, which matches $x(t+h) = x + h\dot{x} + \frac{h^2}{2}\ddot{x} + O(h^3)$ because $\ddot{x} = f'f$.

**Verifying the order.** If the error behaves as $Ch^p$, then halving the step divides the error by $2^p$, and the order can be *measured*: $p \approx \log_2\big(e(h)/e(h/2)\big)$. Figure 4.2(a) shows this for three methods. A convergence-order test of this kind is one of the most powerful tests of an integrator: an implementation bug almost always destroys the expected order (Milestone 4).

**Stability.** Euler's method applied to the decaying equation $\dot{x} = -\lambda x$ gives $x_{k+1} = (1 - h\lambda)x_k$, which blows up when $h > 2/\lambda$, although the true solution decays. Stiff systems, with very fast decaying modes, need tiny steps or implicit methods. Applied to an oscillator, Euler's method multiplies the amplitude by $\sqrt{1 + h^2\omega^2} > 1$ per step and spirals outward (Figure 4.2b). Inertial navigation is not stiff, but this effect is the reason a naive attitude integrator slowly inflates the norm of its rotation matrix, as we now see.

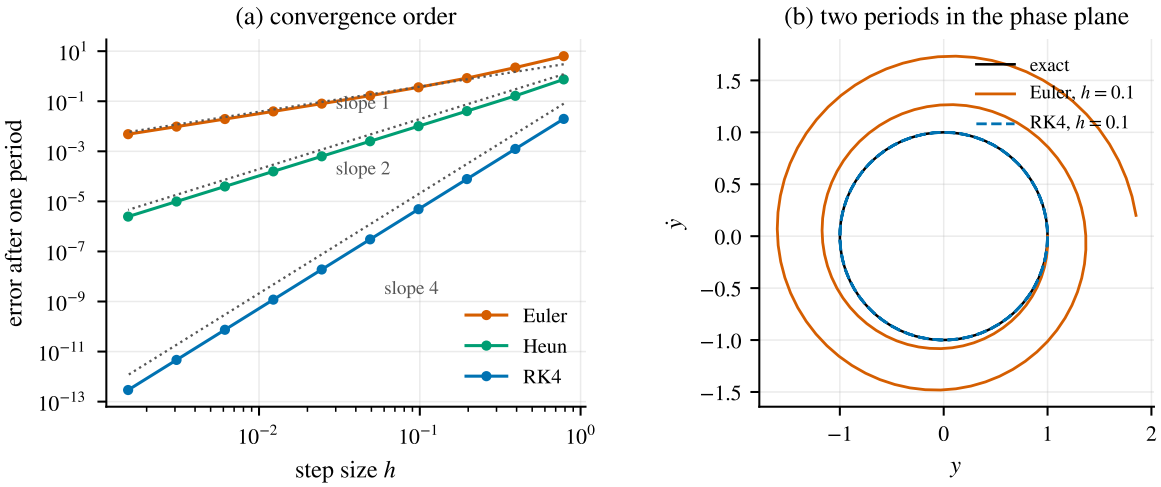



**Figure 4.2:** Integrating the harmonic oscillator $\ddot{y} = -y$. (a) Global error after one period versus step size: slopes 1, 2 and 4 confirm the orders of Euler, Heun and RK4. (b) With $h = 0.1$, Euler's method spirals outward, gaining energy every step, while RK4 stays on the circle to plotting accuracy.

### 4.3.3 Integrating on a curved space

Apply Euler's method to the attitude kinematics $\dot{R} = R[\omega]_\times$: $R_{k+1} = R_k + hR_k[\omega]_\times = R_k(I + h[\omega]_\times)$. The result is not a rotation matrix:

$$(I + h[\omega]_\times)^\mathsf{T}(I + h[\omega]_\times) = I - h^2[\omega]_\times^2 \neq I, \tag{4.12}$$

so every step stretches vectors perpendicular to $\omega$ by a factor of about $1 + \frac{1}{2}h^2\|\omega\|^2$, and the matrix drifts off the set of rotations. The remedy is to integrate in a way that respects the structure of the space. For constant $\omega$ over the step, the exact solution is $R_k \exp(h[\omega]_\times)$ (Theorem 4.5), so the *Lie–Euler* method

$$R_{k+1} = R_k \exp(h[\omega_k]_\times) \tag{4.13}$$

stays exactly on the set of rotations (Proposition 3.15) and is first order in general, exact when $\omega$ is constant. Higher-order generalizations (Runge–Kutta–Munthe-Kaas methods) apply Runge–Kutta to a vector-space parameterization of the increment. Every attitude update in these notes is multiplicative in this sense (AGENTS.md F1).

## 4.4 Numerical differentiation

Analytic Jacobians are derived by hand and verified numerically (AGENTS.md E6). Numerical differentiation is easy to write and easy to get subtly wrong, because it is a subtraction of nearly equal numbers.

**Forward differences.** By Taylor's theorem,

$$\frac{f(x + h) - f(x)}{h} = f'(x) + \frac{h}{2}f''(\xi), \tag{4.14}$$

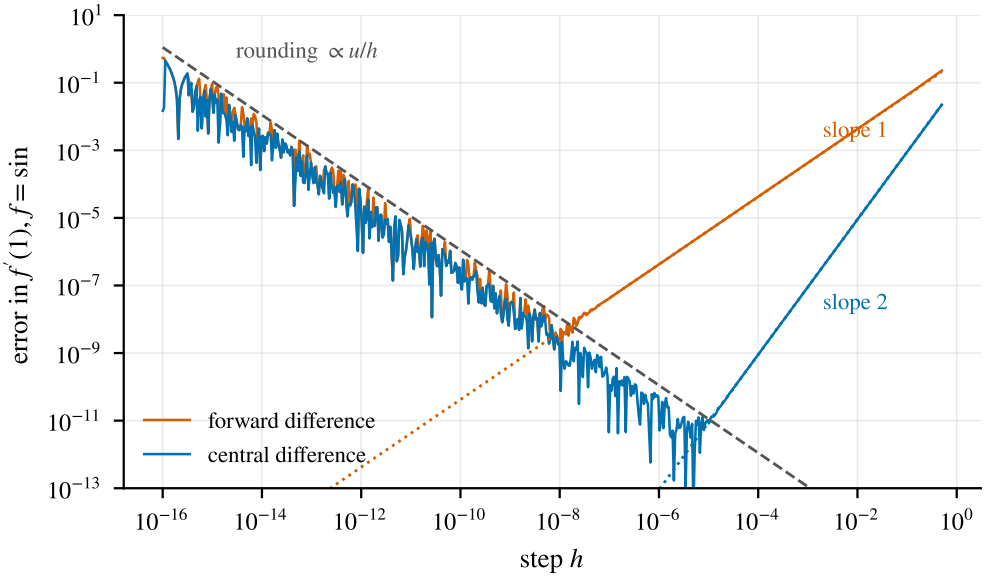



**Figure 4.3:** Error of finite-difference derivatives of $\sin x$ at $x = 1$ versus step size. To the right of the optimum, truncation error dominates (slopes 1 and 2); to the left, rounding error grows like $u/h$. Central differences reach about $10^{-11}$; forward differences only about $10^{-8}$.

so the *truncation error* is about $\frac{h}{2}|f''|$. But $f(x+h)$ and $f(x)$ are each computed with a rounding error of about $u|f|$, and their difference is divided by $h$, which adds a *rounding error* of about $2u|f|/h$. The total $\frac{h}{2}|f''| + \frac{2u|f|}{h}$ is minimized at $h^\star = 2\sqrt{u|f|/|f''|} \approx 10^{-8}$ for quantities of order one, with a total error of about $10^{-8}$.

**Central differences.** Expanding both $f(x \pm h)$,

$$\frac{f(x+h) - f(x-h)}{2h} = f'(x) + \frac{h^2}{6} f'''(\xi), \tag{4.15}$$

because the even-order terms cancel. The total error $\frac{h^2}{6}|f'''| + \frac{u|f|}{h}$ is minimized at

$$h^\star = \left(\frac{3\,u\,|f|}{|f'''|}\right)^{1/3} \approx 10^{-5} \text{ to } 10^{-6}, \tag{4.16}$$

with a total error of order $u^{2/3} \approx 10^{-11}$.

Figure 4.3 shows both error regimes. This is why the Jacobian tests of the project use central differences with $h \approx 10^{-6}$ and tolerances of about $10^{-6}$ to $10^{-8}$ relative to the size of the entries. A tolerance tighter than the achievable accuracy makes a correct implementation fail; a much looser one lets a wrong implementation pass.

**Jacobians.** For $f : \mathbb{R}^n \to \mathbb{R}^m$, column $j$ of the numerical Jacobian is $\big(f(x + he_j) - f(x - he_j)\big)/2h$, costing $2n$ evaluations of $f$. On manifolds the perturbation and the difference are replaced by $\boxplus$ and $\boxminus$ (Chapter 8); nothing else changes.

**Going deeper: the complex-step derivative**

If $f$ is analytic and can be evaluated with complex arguments, $f'(x) = \operatorname{Im} f(x + ih)/h + O(h^2)$, with no subtraction at all. With $h = 10^{-20}$ the result is exact to machine precision. The technique requires that every operation in $f$ be implemented for complex numbers and avoid non-analytic functions (absolute values, comparisons), which rules it out for most estimator code. It is a superb way to generate reference Jacobians in Python, though.

**Key takeaways**

- The Jacobian is the matrix of the best linear approximation; the chain rule multiplies Jacobians in composition order.
- Taylor's theorem bounds approximation errors. "First order" means an error of $O(\|\delta\|^2)$.
- $\mathrm{d}(A^{-1}) = -A^{-1}\mathrm{d}A\,A^{-1}$ and $\mathrm{d}\log\det A = \operatorname{tr}(A^{-1}\mathrm{d}A)$.
- $\dot{x} = Ax + Bu$ is solved by $e^{At}$ plus a convolution of the inputs; time-varying systems use the state transition matrix, which is *not* the exponential of the integrated system matrix unless the matrices commute.
- A method of order $p$ has global error $O(h^p)$; halving the step should divide the error by $2^p$. Measure it.
- Euler's method leaves the set of rotations; multiplicative updates $R\exp(h[\omega]_\times)$ do not.
- Central differences with $h \approx 10^{-6}$ reach about $10^{-11}$ accuracy; forward differences only about $10^{-8}$.

## Exercises

**4.1** Compute the Jacobian of $f(x, y) = (x^2 y, \sin(xy), e^x)$ and verify it with central differences.

**4.2** Use Taylor's theorem to bound the error of $\cos h \approx 1 - h^2/2$ for $|h| \le 0.1$.

**4.3** Show that $\nabla_x \|Ax - b\|^2 = 2A^\mathsf{T}(Ax - b)$ and $\nabla_x^2 \|Ax - b\|^2 = 2A^\mathsf{T}A$.

**4.4** Solve $\dot{x} = -2x + 1$, $x(0) = 3$, and check the solution by substitution.

**4.5** For $A = \begin{bmatrix} 0 & 1 \\ -1 & 0 \end{bmatrix}$, compute $e^{At}$ and interpret the solution of $\dot{x} = Ax$.

**4.6** Find the state transition matrix of $\dot{x} = \begin{bmatrix} 0 & t \\ 0 & 0 \end{bmatrix} x$. Do the matrices $A(t)$ commute?

**4.7** Construct two angular velocity profiles with the same integral $\int \omega\,\mathrm{d}t$ that produce different final rotations.

**4.8** Implement Euler, Heun and RK4 for the harmonic oscillator and reproduce Figure 4.2(a).

**4.9** Show that one Euler step on $\dot{R} = R[\omega]_\times$ increases $\det R$ by a factor $1 + h^2\|\omega\|^2$, to leading order.

**4.10** Reproduce Figure 4.3 and compare the observed optimal step sizes with the formulas of Section 4.4.

## Solutions to the exercises

**4.1** Differentiating each component with respect to $x$ and $y$,

$$\frac{\partial f}{\partial(x,y)} = \begin{bmatrix} 2xy & x^2 \\ y\cos(xy) & x\cos(xy) \\ e^x & 0 \end{bmatrix}.$$

At $(x,y) = (0.7, -1.3)$ this is $\begin{bmatrix} -1.82 & 0.49 \\ -0.798 & 0.430 \\ 2.014 & 0 \end{bmatrix}$, and the central-difference Jacobian with $h = 10^{-6}$, column $j$ being $\big(f(x + he_j) - f(x - he_j)\big)/2h$, agrees to $10^{-10}$, the accuracy predicted in Section 4.4.

**4.2** The cubic Taylor term of cos at 0 vanishes, so $1 - h^2/2$ is also the degree-3 Taylor polynomial, and Theorem 4.3 with $n = 3$ gives the remainder $\cos(\xi)\, h^4/4!$. Hence $|\cos h - (1 - h^2/2)| \le h^4/24 \le 4.2 \times 10^{-6}$ for $|h| \le 0.1$. The bound is tight: at $h = 0.1$ the actual error is $4.165 \times 10^{-6}$. Using $n = 2$ instead would give the much weaker bound $|h|^3/6 \approx 1.7 \times 10^{-4}$; knowing which terms vanish pays off.

**4.3** Expand $f(x) = \|Ax - b\|^2 = x^\mathsf{T}A^\mathsf{T}Ax - 2b^\mathsf{T}Ax + b^\mathsf{T}b$. The quadratic-form rule with the symmetric matrix $A^\mathsf{T}A$ gives $\nabla(x^\mathsf{T}A^\mathsf{T}Ax) = 2A^\mathsf{T}Ax$, and $\nabla(b^\mathsf{T}Ax) = A^\mathsf{T}b$, so

$$\nabla_x f = 2A^\mathsf{T}Ax - 2A^\mathsf{T}b = 2A^\mathsf{T}(Ax - b), \qquad \nabla_x^2 f = \frac{\partial}{\partial x}\big(2A^\mathsf{T}Ax - 2A^\mathsf{T}b\big) = 2A^\mathsf{T}A.$$

Setting the gradient to zero gives the normal equations; the Hessian $2A^\mathsf{T}A \succeq 0$ shows that any such point is a minimum.

**4.4** With $a = -2$ and $b = 1$ the integrating-factor formula gives

$$x(t) = 3e^{-2t} + \int_0^t e^{-2(t-s)}\,\mathrm{d}s = 3e^{-2t} + \tfrac{1}{2}\big(1 - e^{-2t}\big) = \tfrac{1}{2} + \tfrac{5}{2}e^{-2t}.$$

Check: $\dot{x} = -5e^{-2t}$ and $-2x + 1 = -1 - 5e^{-2t} + 1 = -5e^{-2t}$; $x(0) = \frac{1}{2} + \frac{5}{2} = 3$. The solution decays from 3 to the equilibrium $\frac{1}{2}$ with time constant $\frac{1}{2}$.

**4.5** $A^2 = -I$, so as in the solution of Exercise 3.7 the series splits into the cosine and sine series:

$$e^{At} = \cos t\, I + \sin t\, A = \begin{bmatrix} \cos t & \sin t \\ -\sin t & \cos t \end{bmatrix}.$$

This is a rotation by $-t$. The system is $\dot{x}_1 = x_2$, $\dot{x}_2 = -x_1$, the harmonic oscillator $\ddot{x}_1 = -x_1$ with $x_1$ = position and $x_2$ = velocity. Its solutions move clockwise around circles at unit angular rate; $\|x\|^2$, the energy, is conserved. (Euler's method fails to conserve it, Figure 4.2b.)

**4.6** The second equation gives $x_2(t) = x_2(s)$, and then $\dot{x}_1 = t\, x_2(s)$ integrates to $x_1(t) =$

$x_1(s) + \frac{1}{2}(t^2 - s^2)x_2(s)$, so

$$\Phi(t,s) = \begin{bmatrix} 1 & \frac{1}{2}(t^2 - s^2) \\ 0 & 1 \end{bmatrix}.$$

The matrices do commute: $A(t)A(s) = \begin{bmatrix} 0 & t \\ 0 & 0 \end{bmatrix}\begin{bmatrix} 0 & s \\ 0 & 0 \end{bmatrix} = 0 = A(s)A(t)$. Accordingly property 4 of Proposition 4.7 applies: $\int_s^t A = \begin{bmatrix} 0 & \frac{1}{2}(t^2 - s^2) \\ 0 & 0 \end{bmatrix}$ is nilpotent and its exponential is exactly $\Phi(t,s)$.

**4.7** Profile A: rotate about $x$ at $\pi/2$ rad/s for one second, then about $y$ at $\pi/2$ rad/s for one second. Profile B: the same two segments in the opposite order. Both have $\int \omega \, dt = (\pi/2, \pi/2, 0)$. With body rates, $R = R(0)\exp(\cdot)\exp(\cdot)$, so the final rotations are

$$R_A = R_x(90°)R_y(90°) = \begin{bmatrix} 0 & 0 & 1 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix}, \qquad R_B = R_y(90°)R_x(90°) = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & -1 \\ -1 & 0 & 0 \end{bmatrix},$$

both 120° rotations but about different axes, 120° apart from each other. Neither equals $\exp([(\pi/2, \pi/2, 0)]_\times)$, a 127° rotation about $(1,1,0)/\sqrt{2}$. The integral of $\omega$ does not determine the rotation; the order of the rotations does.

**4.8** The implementation follows the formulas of Section 4.3, with $f(y) = (y_2, -y_1)$, $y_0 = (1,0)$, and $N$ steps of $h = 2\pi/N$ over one period:

```
def step(method, y, h):
    f = lambda y: np.array([y[1], -y[0]])
    if method == "Euler": return y + h * f(y)
    if method == "Heun":
        k1 = f(y); k2 = f(y + h * k1); return y + h / 2 * (k1 + k2)
    k1 = f(y); k2 = f(y + h/2 * k1); k3 = f(y + h/2 * k2); k4 = f(y + h * k3)
    return y + h / 6 * (k1 + 2 * k2 + 2 * k3 + k4)
```

The final errors $\|y_N - y_0\|$ for $N = 32, 64, 128, 256$ are $0.84, 0.36, 0.17, 0.080$ (Euler), $4.1 \times 10^{-2}, 1.0 \times 10^{-2}, 2.5 \times 10^{-3}, 6.3 \times 10^{-4}$ (Heun) and $7.8 \times 10^{-5}, 4.9 \times 10^{-6}, 3.0 \times 10^{-7}, 1.9 \times 10^{-8}$ (RK4). The ratios between successive errors give measured orders $\log_2(e_h/e_{h/2}) \approx 1.1, 2.0$ and $4.0$. Euler approaches order 1 only slowly because its errors are still large: at $N = 32$ the amplitude has already grown by $\left(1 + (2\pi/32)^2\right)^{16} \approx 1.8$.

**4.9** One Euler step is $R_{k+1} = R_k(I + h[\omega]_\times)$, so $\det R_{k+1} = \det R_k \det(I + h[\omega]_\times)$. The eigenvalues of $[\omega]_\times$ are $0$ and $\pm i\|\omega\|$ (Exercise 2.7), so those of $I + h[\omega]_\times$ are $1$ and $1 \pm ih\|\omega\|$, and

$$\det(I + h[\omega]_\times) = 1 \cdot (1 + ih\|\omega\|)(1 - ih\|\omega\|) = 1 + h^2\|\omega\|^2.$$

The factor is in fact exact, not only leading order. After $n$ steps $\det R = (1 + h^2\|\omega\|^2)^n \approx e^{nh^2\|\omega\|^2}$: at 200 Hz and 1 rad/s this is $e^{2.5\times10^{-5}\,n}$, a 2.5% inflation per thousand steps. The Lie–Euler update $R_k \exp(h[\omega]_\times)$ keeps $\det R = 1$ exactly.

**4.10** Evaluating the two formulas of Section 4.4 on a log-spaced grid of $h$ for $f = \sin$ at

$x = 1$ reproduces the figure. The theory predicts, with $u = 2^{-53}$, $|f| = \sin 1 = 0.84$, $|f''| = 0.84$, $|f'''| = \cos 1 = 0.54$:

- forward differences: $h^\star = 2\sqrt{u|f|/|f''|} = 2.1 \times 10^{-8}$, with error $2\sqrt{u|f||f''|} = 1.8 \times 10^{-8}$;
- central differences: $h^\star = (3u|f|/|f'''|)^{1/3} = 8.0 \times 10^{-6}$, with error $1.7 \times 10^{-11}$.

The observed minima (taking the median error in a small window of $h$, since the rounding part is erratic) lie at $h \approx 10^{-8}$ and $5 \times 10^{-6}$, with errors of about $3 \times 10^{-9}$ and $3 \times 10^{-12}$. The optimal steps agree with the formulas to within a factor of two, and the observed errors are a few times smaller than the predicted ones, because the formulas add worst-case rounding errors while the actual rounding errors of $f(x + h)$ and $f(x - h)$ are partly random and partly cancel.

Chapter 5

# Probability and Random Vectors

**In this chapter**

- Build probability from its axioms: conditional probability, independence and Bayes' rule.
- Work with random variables and random vectors: densities, expectations, covariances and changes of variables.
- Derive the Gaussian distribution and its key properties: affine maps, marginals, conditionals and the fusion of estimates.
- Understand the law of large numbers, the central limit theorem and Monte Carlo methods.
- Derive the $\chi^2$ distribution and use it for hypothesis tests, the basis of gating and consistency checks.
- Understand how nonlinear functions distort distributions, and what linearization keeps and loses.

A filter does not merely estimate the state; it maintains a probability distribution over it. The estimate is the center of that distribution, and the covariance describes its spread. This chapter develops the probability theory that gives these words a precise meaning.

## 5.1 Probability

### 5.1.1 Events and the axioms

A random experiment has a set $\Omega$ of possible outcomes, the *sample space*. An *event* is a subset of outcomes, and a *probability* assigns to each event $A$ a number $P(A)$ obeying three axioms (Kolmogorov):

1. $P(A) \geq 0$ for every event;
2. $P(\Omega) = 1$;
3. if $A_1, A_2, \ldots$ are mutually exclusive (pairwise disjoint), $P(A_1 \cup A_2 \cup \cdots) = \sum_i P(A_i)$.

Everything else follows: $P(\text{not } A) = 1 - P(A)$, $P(A \cup B) = P(A) + P(B) - P(A \cap B)$, and so on. Probability can be read as a long-run frequency (the fraction of repetitions in which $A$ occurs) or as a degree of belief; the mathematics is the same, and filters use both readings.

### 5.1.2 Conditional probability and independence

**Definition 5.1** (Conditional probability). For $P(B) > 0$, the probability of $A$ given $B$ is $P(A \mid B) = P(A \cap B)/P(B)$.

Conditioning restricts attention to the outcomes in which $B$ happened and renormalizes. Two events are *independent* if $P(A \cap B) = P(A)P(B)$, equivalently $P(A \mid B) = P(A)$: knowing that $B$ occurred tells nothing about $A$.

**Proposition 5.2** (Law of total probability and Bayes' rule). *If $B_1, \dots, B_n$ are mutually exclusive and cover $\Omega$, then $P(A) = \sum_i P(A \mid B_i)P(B_i)$, and*

$$P(B_i \mid A) = \frac{P(A \mid B_i)\,P(B_i)}{\sum_j P(A \mid B_j)\,P(B_j)}. \tag{5.1}$$

*Proof.* $A$ is the disjoint union of the $A \cap B_i$, and $P(A \cap B_i) = P(A \mid B_i)P(B_i)$. Bayes' rule is the definition of conditional probability applied twice: $P(B_i \mid A)P(A) = P(A \cap B_i) = P(A \mid B_i)P(B_i)$. ∎

Bayes' rule turns the probability of an observation given a hypothesis (which a sensor model provides) into the probability of the hypothesis given the observation (which we want).

**Worked example: how informative is a passed test?**

Suppose 10% of the feature tracks reaching an outlier test are wrong. The test rejects 90% of wrong tracks, and (being a 95% gate) also rejects 5% of correct ones. A track passes. What is the probability that it is wrong? With $W$ = "wrong" and $A$ = "passes": $P(A \mid W) = 0.1$, $P(W) = 0.1$, $P(A \mid \text{correct}) = 0.95$, $P(\text{correct}) = 0.9$. Bayes' rule gives

$$P(W \mid A) = \frac{0.1 \times 0.1}{0.1 \times 0.1 + 0.95 \times 0.9} = \frac{0.01}{0.865} \approx 1.2\%.$$

The test reduces the outlier fraction from 10% to about 1%: very useful, but not perfect, which is why the estimator adds further checks downstream.

## 5.2 Random variables

### 5.2.1 Distributions, densities and expectations

A *random variable* $X$ is a numerical quantity determined by the outcome of an experiment. Its *cumulative distribution function* is $F(x) = P(X \le x)$. A discrete random variable takes countably many values with probabilities $p(x) = P(X = x)$; a continuous one has a *probability density function* (pdf) $p(x) \ge 0$ with

$$P(a \le X \le b) = \int_a^b p(x)\,\mathrm{d}x, \qquad \int_{-\infty}^{\infty} p(x)\,\mathrm{d}x = 1. \tag{5.2}$$

A density is not a probability: $p(x)\,\mathrm{d}x$ is the probability of falling in a small interval of width $\mathrm{d}x$ around $x$, and a density can exceed one.

**Definition 5.3** (Expectation and variance). The *expectation* (mean) of $X$ is $\mathbb{E}[X] = \int x\, p(x)\,\mathrm{d}x$ (a sum for discrete variables). The expectation of a function of $X$ is $\mathbb{E}[g(X)] = \int g(x)p(x)\,\mathrm{d}x$. The *variance* is $\operatorname{Var}(X) = \mathbb{E}[(X - \mathbb{E}X)^2] = \mathbb{E}[X^2] - (\mathbb{E}X)^2$, and its square root is the *standard deviation* $\sigma$.

Expectation is linear: $\mathbb{E}[aX + bY + c] = a\mathbb{E}[X] + b\mathbb{E}[Y] + c$ for any random variables, dependent or not. Variance scales quadratically and ignores shifts: $\operatorname{Var}(aX + c) = a^2 \operatorname{Var}(X)$. The standard deviation has the units of $X$ and measures its typical spread.

**Example 5.4** (Uniform distribution). $X$ uniform on $[a, b]$ has $p(x) = 1/(b - a)$ there, mean $(a + b)/2$ and variance $(b - a)^2/12$. Rounding a reading to a resolution $\Delta$ produces an error that is approximately uniform on $[-\Delta/2, \Delta/2]$, with standard deviation $\Delta/\sqrt{12}$: the quantization noise of a sensor.

### 5.2.2 The Gaussian distribution

**Definition 5.5** (Gaussian distribution). $X \sim \mathcal{N}(\mu, \sigma^2)$ has density

$$p(x) = \frac{1}{\sqrt{2\pi}\,\sigma} \exp\!\Big(-\frac{(x-\mu)^2}{2\sigma^2}\Big). \tag{5.3}$$

The *standard normal* distribution is $\mathcal{N}(0, 1)$.

**Proposition 5.6** (Normalization). $\int_{-\infty}^{\infty} e^{-x^2/2}\,\mathrm{d}x = \sqrt{2\pi}$.

*Proof.* Let $I$ be the integral. Then $I^2 = \iint e^{-(x^2+y^2)/2}\,\mathrm{d}x\,\mathrm{d}y$. In polar coordinates, with area element $r\,\mathrm{d}r\,\mathrm{d}\theta$, $I^2 = \int_0^{2\pi}\int_0^{\infty} e^{-r^2/2} r\,\mathrm{d}r\,\mathrm{d}\theta = 2\pi\big[-e^{-r^2/2}\big]_0^{\infty} = 2\pi$. ∎

Substituting $x \to (x - \mu)/\sigma$ shows that the general density integrates to one, and similar integrals (using symmetry and integration by parts) give $\mathbb{E}[X] = \mu$ and $\operatorname{Var}(X) = \sigma^2$. If $X \sim \mathcal{N}(\mu, \sigma^2)$ then $(X - \mu)/\sigma \sim \mathcal{N}(0, 1)$, and the probabilities of falling within one, two and three standard deviations of the mean are 68.27%, 95.45% and 99.73%. A Gaussian is completely determined by its mean and variance, and is closed under the operations a linear filter performs, which is why Kalman filters can work with means and covariances alone.

## 5.3 Several random variables

### 5.3.1 Joint, marginal and conditional densities

Two random variables $X, Y$ have a *joint density* $p(x, y)$, with $P((X, Y) \in A) = \iint_A p(x, y)\,\mathrm{d}x\,\mathrm{d}y$. From it:

$$\text{marginal:} \quad p(x) = \int p(x, y)\,\mathrm{d}y, \tag{5.4}$$

$$\text{conditional:} \quad p(x \mid y) = \frac{p(x, y)}{p(y)}, \tag{5.5}$$

$$\text{Bayes' rule:} \quad p(x \mid y) = \frac{p(y \mid x)\,p(x)}{p(y)} = \frac{p(y \mid x)\,p(x)}{\int p(y \mid x')p(x')\,\mathrm{d}x'}. \tag{5.6}$$

$X$ and $Y$ are independent if $p(x, y) = p(x)p(y)$. In estimation, $x$ is the unknown state and $y$ the measurement: $p(y \mid x)$ is the sensor model (the *likelihood*), $p(x)$ is the *prior*, and $p(x \mid y)$ the *posterior*.

### 5.3.2 Covariance and correlation

The *covariance* $\operatorname{Cov}(X, Y) = \mathbb{E}[(X - \mathbb{E}X)(Y - \mathbb{E}Y)]$ measures how two variables vary together, and the *correlation coefficient* $\rho = \operatorname{Cov}(X, Y)/(\sigma_X \sigma_Y) \in [-1, 1]$ normalizes it (the bound is the Cauchy–Schwarz inequality). Independent variables have zero covariance, and then $\operatorname{Var}(X + Y) = \operatorname{Var}(X) + \operatorname{Var}(Y)$: variances of independent errors add.

The converse fails: zero correlation does not imply independence. If $X \sim \mathcal{N}(0, 1)$ and $Y = X^2$, then $\operatorname{Cov}(X, Y) = \mathbb{E}[X^3] = 0$, yet $Y$ is a function of $X$. Correlation measures only *linear* dependence. (For jointly Gaussian variables the converse does hold, as shown below.)

## 5.4 Random vectors

### 5.4.1 Mean and covariance

For a random vector $x \in \mathbb{R}^n$ with density $p(x)$, the mean and *covariance matrix* are

$$\mu = \mathbb{E}[x], \qquad \Sigma = \operatorname{Cov}(x) = \mathbb{E}\big[(x - \mu)(x - \mu)^{\mathsf{T}}\big] = \mathbb{E}[xx^{\mathsf{T}}] - \mu\mu^{\mathsf{T}}. \tag{5.7}$$

The diagonal of $\Sigma$ holds the variances $\sigma_i^2$ and its off-diagonal entries the covariances. $\Sigma$ is symmetric and positive semi-definite: for any fixed $a$, $a^{\mathsf{T}}\Sigma a = \mathbb{E}\big[(a^{\mathsf{T}}(x - \mu))^2\big] \geq 0$. The *cross-covariance* of two random vectors is $\Sigma_{xy} = \mathbb{E}[(x - \mu_x)(y - \mu_y)^{\mathsf{T}}]$, and $\Sigma_{yx} = \Sigma_{xy}^{\mathsf{T}}$.

**Proposition 5.7** (Affine transformations)**.** *If $y = Ax + b$ then $\mathbb{E}[y] = A\mu + b$ and $\operatorname{Cov}(y) = A\Sigma A^{\mathsf{T}}$. If $x$ and $w$ are uncorrelated, $\operatorname{Cov}(Ax + Bw) = A\Sigma_x A^{\mathsf{T}} + B\Sigma_w B^{\mathsf{T}}$.*

*Proof.* Linearity of expectation gives the mean. Then $\operatorname{Cov}(y) = \mathbb{E}[A(x-\mu)(x-\mu)^{\mathsf{T}}A^{\mathsf{T}}] = A\Sigma A^{\mathsf{T}}$. With uncorrelated $x$ and $w$, the cross terms $A\Sigma_{xw}B^{\mathsf{T}}$ vanish. ∎

This one proposition is the covariance propagation of the Kalman filter ($P \leftarrow \Phi P \Phi^{\mathsf{T}} + Q$), the covariance of a stacked measurement, and the augmentation formula of stochastic cloning ($P \leftarrow JPJ^{\mathsf{T}}$).

**Proposition 5.8** (Expected value of a quadratic form)**.** *For any matrix $A$, $\mathbb{E}[x^\mathsf{T} A x] = \operatorname{tr}(A\Sigma) + \mu^\mathsf{T} A \mu$. In particular, if $\mu = 0$ then $\mathbb{E}[x^\mathsf{T}\Sigma^{-1}x] = \operatorname{tr}(I_n) = n$.*

*Proof.* $x^\mathsf{T} A x = \operatorname{tr}(A x x^\mathsf{T})$, and expectation commutes with the trace: $\mathbb{E}[x^\mathsf{T} A x] = \operatorname{tr}(A\,\mathbb{E}[x x^\mathsf{T}]) = \operatorname{tr}(A(\Sigma + \mu\mu^\mathsf{T}))$. ∎

The special case is the reason a consistent filter's normalized estimation error squared averages to the dimension of the state (Chapter 19).

### 5.4.2 Changing variables

**Proposition 5.9** (Change of variables)**.** *If $y = g(x)$ with $g$ invertible and differentiable, the densities are related by $p_y(y) = p_x\big(g^{-1}(y)\big)\left|\det \frac{\partial g^{-1}}{\partial y}\right|$.*

In one dimension this follows from equating probabilities of corresponding small intervals, $p_y(y)\,|\mathrm{d}y| = p_x(x)\,|\mathrm{d}x|$; in several dimensions the determinant measures how $g^{-1}$ stretches volumes (Section 2.6). For an invertible linear map $y = Ax$ the factor is the constant $1/|\det A|$.

## 5.5 The multivariate Gaussian

### 5.5.1 Definition

**Definition 5.10** (Multivariate Gaussian)**.** A random vector $x \in \mathbb{R}^n$ is Gaussian, $x \sim \mathcal{N}(\mu, \Sigma)$, if it can be written as $x = \mu + Ls$ where $s$ has independent standard normal components and $LL^\mathsf{T} = \Sigma$. If $\Sigma > 0$ its density is

$$p(x) = \frac{1}{\sqrt{(2\pi)^n \det \Sigma}} \exp\Big( -\tfrac{1}{2}(x-\mu)^\mathsf{T}\Sigma^{-1}(x-\mu)\Big). \tag{5.8}$$

The quantity $d_M^2(x) = (x-\mu)^\mathsf{T}\Sigma^{-1}(x-\mu)$ is the squared *Mahalanobis distance* of $x$ from the mean.

*Derivation of the density.* The density of $s$ is the product of $n$ standard normal densities, $(2\pi)^{-n/2}\exp(-\tfrac{1}{2}s^\mathsf{T}s)$. By Proposition 5.9 with $s = L^{-1}(x-\mu)$, $p(x) = (2\pi)^{-n/2}\exp\big(-\tfrac{1}{2}(x-\mu)^\mathsf{T}L^{-\mathsf{T}}L^{-1}(x-\mu)\big)/|\det L|$. Since $L^{-\mathsf{T}}L^{-1} = (LL^\mathsf{T})^{-1} = \Sigma^{-1}$ and $|\det L| = \sqrt{\det\Sigma}$, this is (5.8). ∎

By Proposition 5.7, the mean of $x$ is $\mu$ and its covariance is $L\,\mathbb{E}[ss^\mathsf{T}]L^\mathsf{T} = \Sigma$. The definition also handles singular covariances (with $L$ not invertible), which arise naturally in stochastic cloning (Chapter 25).

**Geometry.** The density is constant on the ellipsoids $d_M^2(x) = c$, whose axes point along the eigenvectors of $\Sigma$ with lengths proportional to the square roots of its eigenvalues (Figures 2.4 and 5.1). The Mahalanobis distance measures distance in units of standard deviations along each principal axis, which makes it the natural way to ask whether a vector is "far" from a distribution.

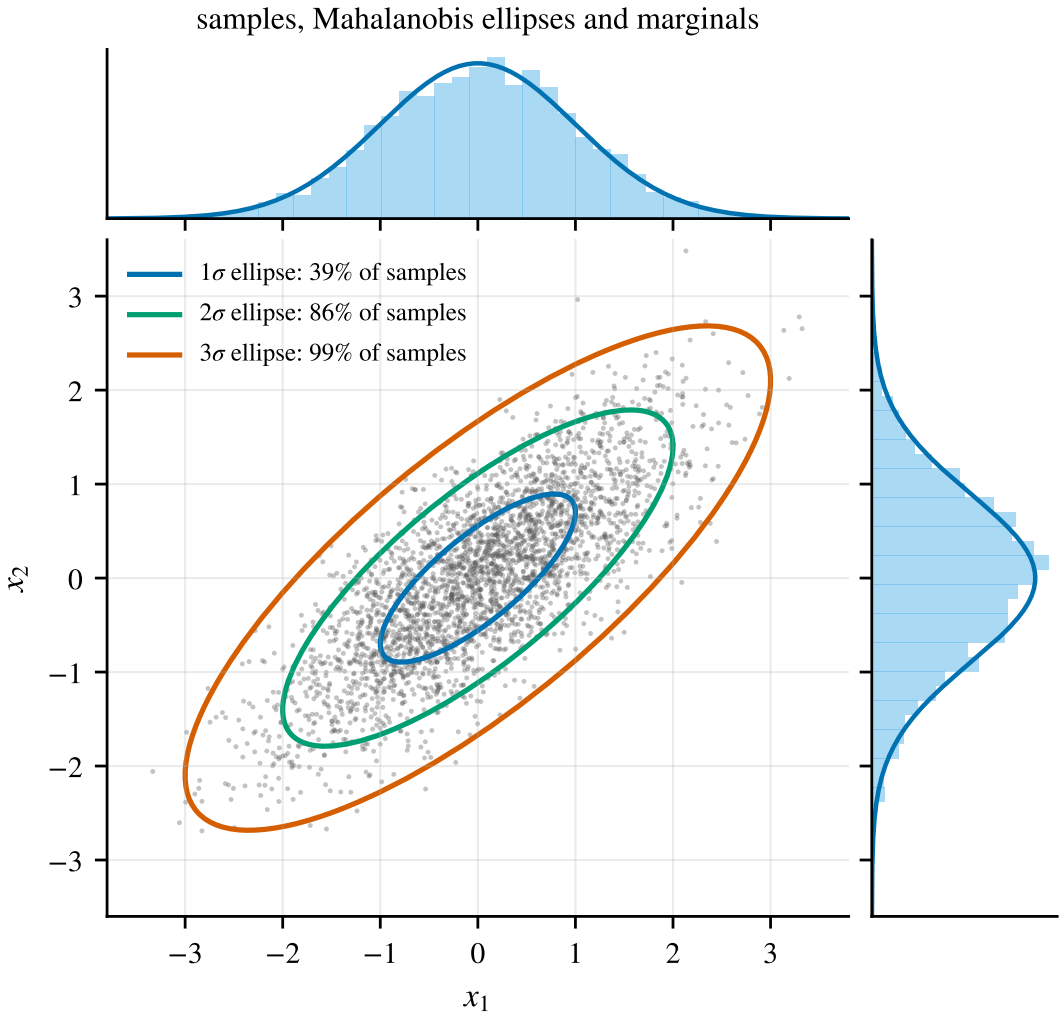



**Figure 5.1:** Samples of a correlated 2D Gaussian with the $1\sigma$, $2\sigma$ and $3\sigma$ Mahalanobis ellipses, and the two marginal densities. The ellipses are aligned with the eigenvectors of $\Sigma$. In two dimensions they contain 39%, 86% and 99% of the probability, not the familiar 68–95–99.7% of one dimension.

**Sampling.** To draw from $\mathcal{N}(\mu, \Sigma)$, factor $\Sigma = LL^\mathsf{T}$ (Cholesky), draw $s \sim \mathcal{N}(0, I)$, and return $\mu + Ls$. Monte Carlo tests of covariance propagation (Milestone 5) use exactly this.

**Closure.** Affine maps of Gaussian vectors are Gaussian (directly from the definition). Marginals, conditionals and products of Gaussian densities are Gaussian (next section). Hence a Gaussian belief propagated through a linear system with Gaussian noise remains exactly Gaussian, and the Kalman filter is exact in that case. For jointly Gaussian vectors, uncorrelated implies independent: if the covariance is block diagonal, the density factors.

**Information form.** A Gaussian can equally be parameterized by the *information matrix* $\Lambda = \Sigma^{-1}$ and the *information vector* $\eta = \Sigma^{-1}\mu$. Then $-\log p(x) = \frac{1}{2}x^\mathsf{T}\Lambda x - \eta^\mathsf{T}x + \text{const}$. The information form is natural for combining independent pieces of evidence, since their information adds, and it is the form in which optimization-based estimators work.

### 5.5.2 Marginals and conditionals

Partition a jointly Gaussian vector as

$$\begin{bmatrix} a \\ b \end{bmatrix} \sim \mathcal{N}\left( \begin{bmatrix} \mu_a \\ \mu_b \end{bmatrix}, \begin{bmatrix} \Sigma_{aa} & \Sigma_{ab} \\ \Sigma_{ba} & \Sigma_{bb} \end{bmatrix} \right), \qquad \Lambda = \Sigma^{-1} = \begin{bmatrix} \Lambda_{aa} & \Lambda_{ab} \\ \Lambda_{ba} & \Lambda_{bb} \end{bmatrix}. \tag{5.9}$$

**Theorem 5.11** (Gaussian marginalization and conditioning). *1. The marginal of $a$ is $\mathcal{N}(\mu_a, \Sigma_{aa})$.*

*2. The conditional of $a$ given $b$ is $\mathcal{N}(\mu_{a|b}, \Sigma_{a|b})$ with*

$$\mu_{a|b} = \mu_a + \Sigma_{ab}\Sigma_{bb}^{-1}(b - \mu_b), \qquad \Sigma_{a|b} = \Sigma_{aa} - \Sigma_{ab}\Sigma_{bb}^{-1}\Sigma_{ba}. \tag{5.10}$$

*Proof.* The marginal follows from Proposition 5.7 with the selection matrix $A = [I \;\; 0]$. For the conditional, define $\tilde{a} = a - \Sigma_{ab}\Sigma_{bb}^{-1}b$. Then $\mathrm{Cov}(\tilde{a}, b) = \Sigma_{ab} - \Sigma_{ab}\Sigma_{bb}^{-1}\Sigma_{bb} = 0$, so $\tilde{a}$ and $b$ are uncorrelated, and being jointly Gaussian they are independent. By Proposition 5.7, $\tilde{a} \sim \mathcal{N}(\mu_a - \Sigma_{ab}\Sigma_{bb}^{-1}\mu_b,\ \Sigma_{aa} - \Sigma_{ab}\Sigma_{bb}^{-1}\Sigma_{ba})$. Conditioning on $b$ leaves the distribution of $\tilde{a}$ unchanged (independence), and $a = \tilde{a} + \Sigma_{ab}\Sigma_{bb}^{-1}b$, which gives (5.10). ∎

The conditional mean moves away from $\mu_a$ in proportion to how far $b$ is from its mean, by the "regression" matrix $\Sigma_{ab}\Sigma_{bb}^{-1}$, and the conditional covariance shrinks by a positive semi-definite amount. It does not depend on the observed value of $b$, only on the fact that it was observed. The conditional covariance is the Schur complement $\Sigma/\Sigma_{bb}$; applying Proposition 3.11 to $\Sigma$ shows that $\Lambda_{aa} = \Sigma_{a|b}^{-1}$ and that the marginal information matrix is a Schur complement of $\Lambda$. The two parameterizations therefore swap the roles of the two operations:

| | covariance form $(\mu, \Sigma)$ | information form $(\eta, \Lambda)$ |
|---|---|---|
| marginalize out $b$ | $\Sigma_{aa}$ (**delete rows/columns**) | $\Lambda_{aa} - \Lambda_{ab}\Lambda_{bb}^{-1}\Lambda_{ba}$ (Schur compl.) |
| condition on $b$ | $\Sigma_{aa} - \Sigma_{ab}\Sigma_{bb}^{-1}\Sigma_{ba}$ (Schur compl.) | $\Lambda_{aa}$ (**delete rows/columns**) |

**Key idea: marginalization is free in covariance form**

A Kalman filter stores covariances, so discarding a variable (the oldest clone of the MSCKF window) is literally deleting its rows and columns from $P$. Optimization-based estimators store information matrices, so the same operation requires a Schur complement, which creates fill-in and the "marginalization prior" of sliding-window smoothers (Chapter 10).

## 5.6 Fusing information: Bayes' rule for Gaussians

### 5.6.1 Combining two estimates

Suppose two independent sensors measure the same scalar $x$, with readings $z_1 = x + n_1$ and $z_2 = x + n_2$ and noise variances $\sigma_1^2$ and $\sigma_2^2$. With no other knowledge of $x$, the posterior

density is proportional to the product of the two likelihoods,

$$p(x \mid z_1, z_2) \propto \exp\Big(-\frac{(x-z_1)^2}{2\sigma_1^2}\Big)\exp\Big(-\frac{(x-z_2)^2}{2\sigma_2^2}\Big). \tag{5.11}$$

The exponent is a quadratic in $x$; completing the square shows that the posterior is Gaussian with

$$\frac{1}{\sigma^2} = \frac{1}{\sigma_1^2} + \frac{1}{\sigma_2^2}, \qquad \hat{x} = \sigma^2\Big(\frac{z_1}{\sigma_1^2} + \frac{z_2}{\sigma_2^2}\Big) = z_1 + \frac{\sigma_1^2}{\sigma_1^2+\sigma_2^2}(z_2 - z_1). \tag{5.12}$$

*Inverse variances (information) add*, and the fused estimate is an information-weighted average. The second form already has the shape of a Kalman update: start from $z_1$ and correct it by a gain times the discrepancy $z_2 - z_1$, with a gain between 0 and 1 that is large when the first estimate is poor. The fused variance is smaller than both, so combining independent information always helps.

### 5.6.2 The linear-Gaussian model

**Proposition 5.12** (Linear-Gaussian posterior)**.** *If $x \sim \mathcal{N}(\mu, P)$ and $z = Hx + n$ with $n \sim \mathcal{N}(0, R)$ independent of $x$, the posterior $p(x \mid z)$ is Gaussian, and its mean (which is also its mode) solves the weighted least-squares problem*

$$\hat{x} = \arg\min_x \ \|x-\mu\|_{P^{-1}}^2 + \|z - Hx\|_{R^{-1}}^2, \qquad \|e\|_W^2 := e^{\mathsf{T}} W e. \tag{5.13}$$

*Its covariance is $(P^{-1} + H^{\mathsf{T}}R^{-1}H)^{-1}$.*

*Proof.* By Bayes' rule $p(x \mid z) \propto p(z \mid x)p(x)$, and $-\log p(x \mid z) = \tfrac{1}{2}\|x-\mu\|_{P^{-1}}^2 + \tfrac{1}{2}\|z-Hx\|_{R^{-1}}^2 +$ const. This is a convex quadratic in $x$ whose quadratic term is $\tfrac{1}{2}x^{\mathsf{T}}(P^{-1} + H^{\mathsf{T}}R^{-1}H)x$, so the posterior is Gaussian with that information matrix, and its mode, which for a Gaussian is the mean, minimizes the quadratic. ∎

This is the scalar fusion rule in matrix form: the prior contributes information $P^{-1}$, the measurement contributes $H^{\mathsf{T}}R^{-1}H$, and they add. Chapter 9 develops this into the general theory of estimators, and Chapter 12 turns it into the Kalman filter.

## 5.7 Limit theorems and Monte Carlo

### 5.7.1 The law of large numbers

Let $X_1, X_2, \dots$ be independent draws from the same distribution, with mean $\mu$ and variance $\sigma^2$, and let $\bar{X}_N = \frac{1}{N}\sum_{i=1}^N X_i$ be their *sample mean*. Then $\mathbb{E}[\bar{X}_N] = \mu$ and, because variances of independent terms add, $\operatorname{Var}(\bar{X}_N) = \sigma^2/N$.

**Theorem 5.13** (Weak law of large numbers)**.** *For every $\epsilon > 0$, $P(|\bar{X}_N - \mu| > \epsilon) \to 0$ as $N \to \infty$.*

*Proof.* Chebyshev's inequality $P(|Y - \mathbb{E}Y| \ge \epsilon) \le \operatorname{Var}(Y)/\epsilon^2$ (which follows from $\operatorname{Var}(Y) \ge \mathbb{E}[(Y-\mathbb{E}Y)^2\mathbf{1}_{|Y-\mathbb{E}Y|\ge\epsilon}] \ge \epsilon^2 P(|Y-\mathbb{E}Y|\ge\epsilon)$) applied to $\bar{X}_N$ gives the bound $\sigma^2/(N\epsilon^2) \to 0$. ∎

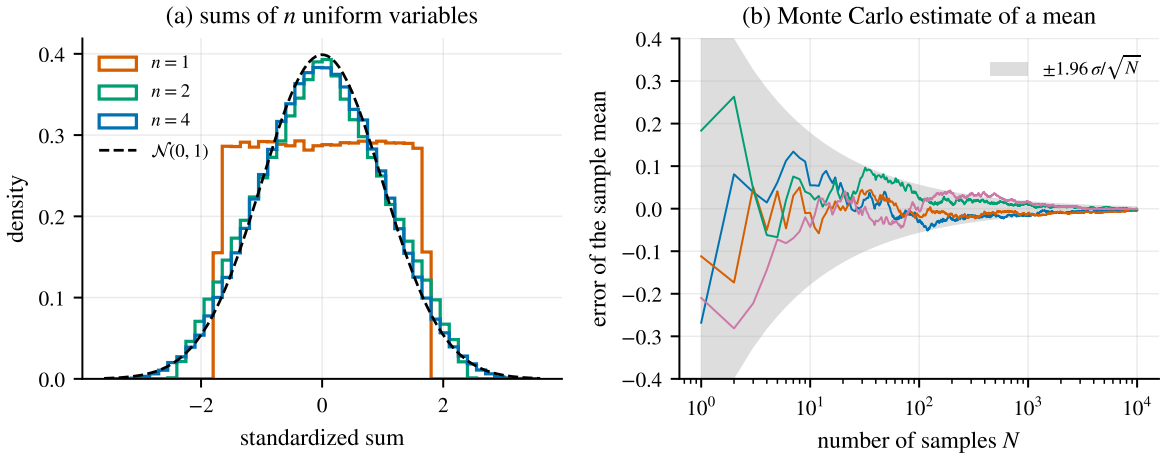



**Figure 5.2:** (a) The central limit theorem: histograms of the standardized sum of $n$ independent uniform variables approach the standard normal density already for $n = 4$. (b) Monte Carlo estimation of a mean: the error of the sample mean shrinks like $1/\sqrt{N}$ (gray band: $\pm 1.96\,\sigma/\sqrt{N}$, the 95% interval).

The law of large numbers justifies *Monte Carlo* methods: to estimate an expectation, average many independent samples. The error shrinks only like $\sigma/\sqrt{N}$, so each additional digit of accuracy costs a hundred times more samples.

### 5.7.2 The central limit theorem

**Theorem 5.14** (Central limit theorem)**.** *Under the same assumptions, the distribution of* $\sqrt{N}(\bar{X}_N - \mu)/\sigma$ *converges to* $\mathcal{N}(0, 1)$.

Sums of many small independent effects are approximately Gaussian, whatever the distribution of each effect (Figure 5.2). Electronic sensor noise is the sum of many microscopic fluctuations, and integrating a noisy signal sums many samples; both are why Gaussian noise models work well in navigation. They work less well for rare large errors (outliers), which is why estimators also need gating and robust methods (Chapters 10 and 18).

## 5.8 The chi-squared distribution

**Definition 5.15.** If $s_1, \dots, s_k$ are independent standard normal variables, $\gamma = \sum_{i=1}^{k} s_i^2$ has the $\chi^2$ distribution with $k$ degrees of freedom, written $\gamma \sim \chi^2_k$.

**Proposition 5.16** (Properties of $\chi^2_k$)**.** $\mathbb{E}[\gamma] = k$ *and* $\mathrm{Var}(\gamma) = 2k$. *Its density is*

$$p(\gamma) = \frac{\gamma^{k/2-1} e^{-\gamma/2}}{2^{k/2}\,\Gamma(k/2)}, \qquad \gamma > 0, \tag{5.14}$$

*where* $\Gamma$ *is the gamma function* ($\Gamma(m) = (m-1)!$ *for integers,* $\Gamma(\tfrac{1}{2}) = \sqrt{\pi}$).

*Proof of the moments and of the case* $k = 1$. For $s \sim \mathcal{N}(0, 1)$, $\mathbb{E}[s^2] = 1$ and $\mathbb{E}[s^4] = 3$ (integration by parts), so $\mathrm{Var}(s^2) = 2$; the moments of the sum follow by additivity over independent terms.

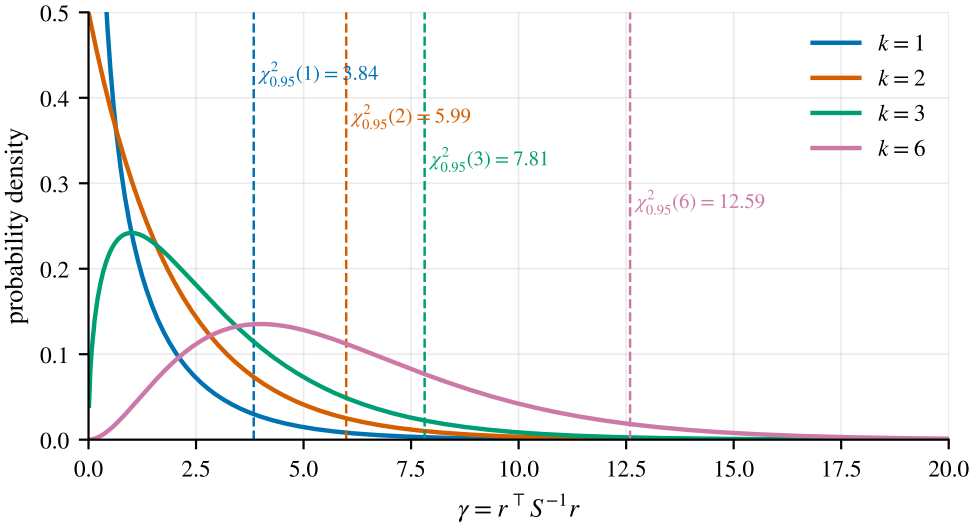



**Figure 5.3:** $\chi^2$ densities and their 95% quantiles. A 2D image measurement whose normalized innovation squared exceeds 5.99 would occur by chance only 5% of the time if the filter's covariance were correct.

For $k = 1$, $\gamma = s^2$ takes the value $\gamma$ when $s = \pm\sqrt{\gamma}$, so $p(\gamma) = 2 \cdot \frac{1}{\sqrt{2\pi}} e^{-\gamma/2} \cdot \frac{\mathrm{d}\sqrt{\gamma}}{\mathrm{d}\gamma} = \frac{1}{\sqrt{2\pi\gamma}} e^{-\gamma/2}$, which is the formula with $k = 1$. The general case follows by convolving densities (or by integrating the Gaussian density over spherical shells). ∎

**Theorem 5.17** (Mahalanobis distance of a Gaussian). *If $x \sim \mathcal{N}(\mu, \Sigma)$ in $\mathbb{R}^k$ with $\Sigma \succ 0$, then $(x-\mu)^\top \Sigma^{-1}(x-\mu) \sim \chi^2_k$.*

*Proof.* With $\Sigma = LL^\top$, the whitened vector $s = L^{-1}(x-\mu)$ is $\mathcal{N}(0, I)$ by Proposition 5.7, and $(x-\mu)^\top\Sigma^{-1}(x-\mu) = s^\top s = \sum_{i} s_i^2$. ∎

The *quantile* $\chi^2_p(k)$ is the value below which a $\chi^2_k$ variable falls with probability $p$ (Figure 5.3; tables in Appendix C). Because independent $\chi^2$ variables add, with their degrees of freedom adding, the sum of $N$ independent squared Mahalanobis distances of $n$-dimensional Gaussians is $\chi^2_{Nn}$. As $k$ grows, $\chi^2_k$ is approximately $\mathcal{N}(k, 2k)$, so its quantiles approach $k \pm 1.96\sqrt{2k}$.

## 5.9 Sample statistics and hypothesis tests

### 5.9.1 Estimating a mean and a variance

Given independent samples $X_1, \dots, X_N$ of a distribution with unknown mean and variance, the natural estimates are the sample mean $\bar{X}$ and the *sample variance*

$$s^2 = \frac{1}{N-1} \sum_{i=1}^{N} (X_i - \bar{X})^2. \tag{5.15}$$

The divisor $N-1$ makes $s^2$ unbiased. Expanding, $\sum_i (X_i - \bar{X})^2 = \sum_i (X_i - \mu)^2 - N(\bar{X} - \mu)^2$, whose expectation is $N\sigma^2 - N \cdot \sigma^2/N = (N-1)\sigma^2$: one degree of freedom is used up by estimating

the mean. For Gaussian samples one can show moreover that $(N-1)s^2/\sigma^2 \sim \chi^2_{N-1}$. This gives exact acceptance intervals for comparing a Monte Carlo sample variance with a predicted variance, as Milestone 5 requires: the ratio $s^2/\sigma^2$ should lie between $\chi^2_{0.025}(N-1)/(N-1)$ and $\chi^2_{0.975}(N-1)/(N-1)$ 95% of the time (for $N = 500$, between 0.880 and 1.128; Appendix C).

### 5.9.2 Hypothesis testing

A *hypothesis test* decides whether data are compatible with a model. The recipe:

1. State a *null hypothesis* $H_0$, for example "this measurement is consistent with the filter's prediction".
2. Choose a *test statistic* whose distribution under $H_0$ is known, for example the squared Mahalanobis distance of the innovation, which is $\chi^2_m$ under $H_0$.
3. Choose a *significance level* $\alpha$ (often 5%) and an *acceptance region* that contains the statistic with probability $1-\alpha$ under $H_0$.
4. Reject $H_0$ if the statistic falls outside the region.

Two errors are possible. A *type I error* rejects a true $H_0$; by construction it happens with probability $\alpha$. A *type II error* accepts a false $H_0$; its probability depends on how different the truth is from $H_0$, and one minus it is the *power* of the test. Lowering $\alpha$ reduces false rejections at the price of more missed detections.

*One-sided* tests reject only large values. Measurement gating is one-sided: a measurement is rejected when its Mahalanobis distance exceeds $\chi^2_{1-\alpha}(m)$, because only large innovations indicate outliers (Chapter 18). *Two-sided* tests reject both unusually large and unusually small values. Filter consistency tests are two-sided: an average normalized error that is too small reveals an underconfident filter just as one that is too large reveals an overconfident one (Chapter 19).

**Pitfall: a 5% test rejects 5% of good data**

At a 95% gate, one in twenty perfectly good measurements is rejected. Over thousands of measurements this is expected and harmless, provided rejections are counted. A rejection rate far from the design value is itself a symptom worth investigating.

## 5.10 Nonlinear transformations

If $y = f(x)$ with $f$ nonlinear and $x \sim \mathcal{N}(\mu, \Sigma)$, then $y$ is generally *not* Gaussian. The extended Kalman filter approximates it by a Gaussian, linearizing $f$ about the mean:

$$y \approx f(\mu) + J(x-\mu), \quad J = \left.\frac{\partial f}{\partial x}\right|_{\mu} \qquad \Longrightarrow \qquad y \mathrel{\dot\sim} \mathcal{N}\big(f(\mu),\, J\Sigma J^{\mathsf{T}}\big). \tag{5.16}$$

How much does this miss? In one dimension, Taylor expansion to second order gives $f(x) \approx f(\mu) + f'(\mu)(x-\mu) + \tfrac{1}{2}f''(\mu)(x-\mu)^2$, and taking expectations,

$$\mathbb{E}[f(x)] \approx f(\mu) + \tfrac{1}{2} f''(\mu)\,\sigma^2. \tag{5.17}$$

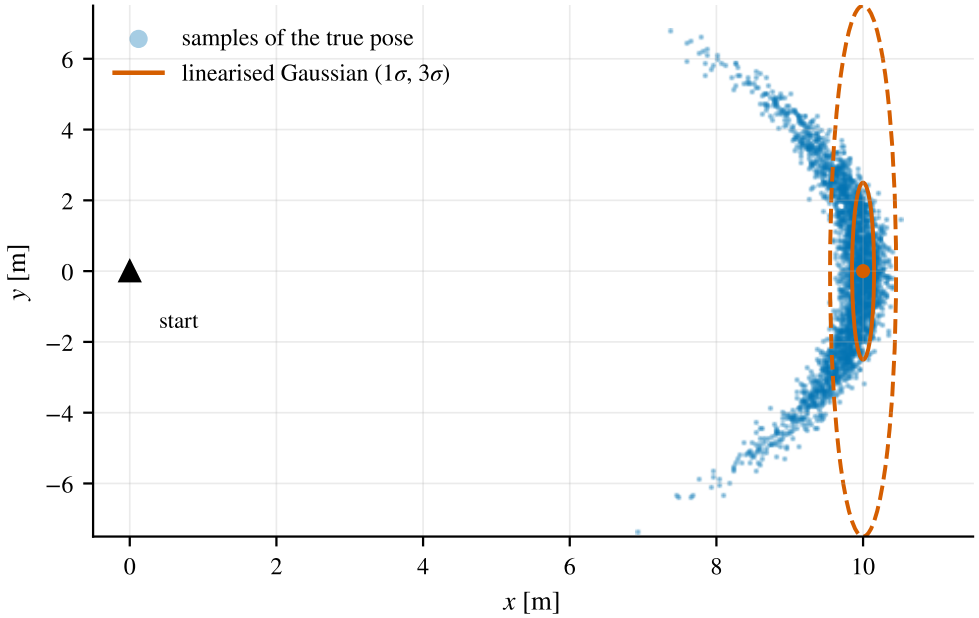



**Figure 5.4:** A robot drives 10 m with a heading uncertainty of $\sigma_\psi = 0.25$ rad. The true distribution of its final position (samples) is a curved "banana". The linearized Gaussian (ellipses) matches its first two moments only locally, puts probability where the robot cannot be, and misses the curvature. Errors of this kind are why an estimator must keep its errors small, the central design principle of the error-state filter.

Linearization therefore ignores a *bias* proportional to the curvature times the variance. The approximation is good when $f$ is nearly linear over the region where $x$ has most of its probability mass, a few standard deviations around $\mu$.

Figure 5.4 shows a classic failure. When heading uncertainty is large, positions are distributed along an arc, and the linearized Gaussian is a poor description: its mean lies outside the arc, and it assigns probability to positions the robot cannot reach. Two remedies exist. One is to reduce the uncertainty that must be linearized: the error-state filter of Chapter 14 keeps the estimation error, not the state, as the quantity it linearizes, and continually resets it to zero. The other is to choose coordinates in which the distribution is close to Gaussian: a Gaussian on the heading angle and travelled distance, pushed through the exact kinematics, reproduces the banana. Chapter 8 develops that idea for rotations, and Chapter 13 presents a third remedy, sigma-point methods that propagate a few carefully chosen samples instead of a linearization.

**Key takeaways**

- Bayes' rule converts a sensor model $p(z \mid x)$ and a prior $p(x)$ into the posterior $p(x \mid z)$.
- Affine maps propagate covariances as $A\Sigma A^\mathsf{T}$. This single fact drives prediction, cloning and stacking.
- $\mathbb{E}[x^\mathsf{T} A x] = \operatorname{tr}(A\Sigma) + \mu^\mathsf{T} A \mu$; the normalized squared error of an $n$-dimensional Gaussian averages to $n$.

- In covariance form, marginalization deletes rows and columns and conditioning takes a Schur complement. Information form is the reverse.
- Fusing independent Gaussian information adds inverse covariances; the result is a gain-weighted correction.
- Monte Carlo errors shrink like $1/\sqrt{N}$; sums of many small effects are nearly Gaussian.
- The squared Mahalanobis distance of an $n$-dimensional Gaussian is $\chi^2_n$: the basis of gating and consistency tests.
- Linearization ignores curvature-induced bias and fails when uncertainty is large relative to curvature.

## Exercises

**5.1** A gyro is either healthy (99%) or faulty (1%). A self-test flags 98% of faulty units and 3% of healthy ones. A unit is flagged; what is the probability that it is faulty?

**5.2** Let $x \sim \mathcal{N}(0, \mathrm{diag}(1, 4))$ and $y = Ax$ with $A$ a rotation by 30°. Compute $\mathrm{Cov}(y)$ and sketch the $1\sigma$ ellipses of $x$ and $y$.

**5.3** Prove that $\Sigma_{a|b} \preceq \Sigma_{aa}$: conditioning never increases uncertainty in the Loewner order. When is the inequality an equality?

**5.4** Derive the information-form marginal $\Lambda_{aa} - \Lambda_{ab}\Lambda_{bb}^{-1}\Lambda_{ba}$ from Proposition 3.11 and show that it equals $\Sigma_{aa}^{-1}$.

**5.5** Complete the square to derive (5.12).

**5.6** Solve (5.13) by setting the gradient to zero, and show that the solution can be written $\hat{x} = \mu + K(z - H\mu)$ for $K = (P^{-1} + H^\mathsf{T}R^{-1}H)^{-1}H^\mathsf{T}R^{-1}$.

**5.7** For $x \sim \mathcal{N}(0, \sigma^2)$ and $y = x^2$, compute the exact mean of $y$ and its first-order linearized prediction. Explain the discrepancy.

**5.8** What fraction of a 2D Gaussian's probability lies inside its $1\sigma$ Mahalanobis ellipse? (Hint: $P(\chi^2_2 \le 1)$.) Inside its $3\sigma$ ellipse?

**5.9** Show that $\mathbb{E}[s^4] = 3$ for $s \sim \mathcal{N}(0, 1)$ by integrating by parts.

**5.10** A Monte Carlo test with $N = 100$ runs finds a sample variance 25% larger than predicted. Is this evidence of an error at the 5% level?

## Solutions to the exercises

**5.1** Let $F$ = faulty and $T$ = flagged. By the law of total probability $P(T) = 0.98 \cdot 0.01 + 0.03 \cdot 0.99 = 0.0098 + 0.0297 = 0.0395$, and by Bayes' rule

$$P(F \mid T) = \frac{P(T \mid F)P(F)}{P(T)} = \frac{0.0098}{0.0395} = 0.248.$$

Only one flagged unit in four is actually faulty. The test is good, but faults are rare: the 3% false-alarm rate applied to the 99% of healthy units produces three times as many flags as the faulty units do. The prior matters as much as the likelihood.

**5.2** With $c = \cos 30^\circ$ and $s = \sin 30^\circ$, Proposition 5.7 gives

$$\operatorname{Cov}(y) = A \operatorname{diag}(1,4) A^{\mathsf{T}} = \begin{bmatrix} c^2 + 4s^2 & -3cs \\ -3cs & s^2 + 4c^2 \end{bmatrix} = \begin{bmatrix} 1.75 & -1.299 \\ -1.299 & 3.25 \end{bmatrix}.$$

A rotation does not change the eigenvalues, still 1 and 4. The $1\sigma$ ellipse of $x$ has semi-axes 1 along $x_1$ and 2 along $x_2$; that of $y$ is the same ellipse rotated by $30^\circ$, its long axis (length 2) along $Ae_2 = (-\tfrac{1}{2}, \tfrac{\sqrt{3}}{2})$, at $120^\circ$ from the first axis. The negative covariance says that $y_1$ and $y_2$ tend to have opposite signs, as the tilt of the ellipse shows.

**5.3** The difference is

$$\Sigma_{aa} - \Sigma_{a|b} = \Sigma_{ab}\Sigma_{bb}^{-1}\Sigma_{ba} = \left(\Sigma_{bb}^{-1/2}\Sigma_{ba}\right)^{\mathsf{T}}\left(\Sigma_{bb}^{-1/2}\Sigma_{ba}\right) \succeq 0,$$

because $x^{\mathsf{T}}\Sigma_{ab}\Sigma_{bb}^{-1}\Sigma_{ba}x = \|\Sigma_{bb}^{-1/2}\Sigma_{ba}x\|^2 \geq 0$ for every $x$ (with $\Sigma_{bb}^{-1/2}$ any square root of $\Sigma_{bb}^{-1} \succ 0$). Equality holds for all $x$ exactly when $\Sigma_{ba}x = 0$ for all $x$, i.e. when $\Sigma_{ab} = 0$: $a$ and $b$ are uncorrelated, hence (being jointly Gaussian) independent, and observing $b$ says nothing about $a$.

**5.4** Order the variables as $(b, a)$, so that $\Lambda$ becomes $\begin{bmatrix} \Lambda_{bb} & \Lambda_{ba} \\ \Lambda_{ab} & \Lambda_{aa} \end{bmatrix}$ and its inverse is $\begin{bmatrix} \Sigma_{bb} & \Sigma_{ba} \\ \Sigma_{ab} & \Sigma_{aa} \end{bmatrix}$. By Proposition 3.11, with the top-left block $\Lambda_{bb}$ playing the role of $A$, the bottom-right block of the inverse is the inverse of the Schur complement:

$$\Sigma_{aa} = \left(\Lambda_{aa} - \Lambda_{ab}\Lambda_{bb}^{-1}\Lambda_{ba}\right)^{-1} \quad \Longleftrightarrow \quad \Lambda_{aa} - \Lambda_{ab}\Lambda_{bb}^{-1}\Lambda_{ba} = \Sigma_{aa}^{-1}.$$

The marginal of $a$ is $\mathcal{N}(\mu_a, \Sigma_{aa})$, whose information matrix is $\Sigma_{aa}^{-1}$: in information form, marginalization is this Schur complement. (The same proposition gives the marginal information vector $\eta_a - \Lambda_{ab}\Lambda_{bb}^{-1}\eta_b$.)

**5.5** Up to terms that do not involve $x$, the exponent is

$$-\frac{(x - z_1)^2}{2\sigma_1^2} - \frac{(x - z_2)^2}{2\sigma_2^2} = -\frac{1}{2}\Big(\frac{1}{\sigma_1^2} + \frac{1}{\sigma_2^2}\Big)x^2 + \Big(\frac{z_1}{\sigma_1^2} + \frac{z_2}{\sigma_2^2}\Big)x + \text{const} = -\frac{(x - \hat{x})^2}{2\sigma^2} + \text{const},$$

where matching the coefficient of $x^2$ gives $1/\sigma^2 = 1/\sigma_1^2 + 1/\sigma_2^2$ and matching that of $x$ gives $\hat{x}/\sigma^2 = z_1/\sigma_1^2 + z_2/\sigma_2^2$. A density proportional to $\exp(-(x - \hat{x})^2/2\sigma^2)$ is $\mathcal{N}(\hat{x}, \sigma^2)$.

Finally, with $\sigma^2 = \sigma_1^2\sigma_2^2/(\sigma_1^2+\sigma_2^2)$, $\hat{x} = (\sigma_2^2 z_1 + \sigma_1^2 z_2)/(\sigma_1^2+\sigma_2^2) = z_1 + \sigma_1^2(z_2 - z_1)/(\sigma_1^2+\sigma_2^2)$, the second form of (5.12).

**5.6** The cost $J(x) = (x-\mu)^{\mathsf{T}}P^{-1}(x-\mu) + (z-Hx)^{\mathsf{T}}R^{-1}(z-Hx)$ has gradient $2P^{-1}(x-\mu) - 2H^{\mathsf{T}}R^{-1}(z-Hx)$. Setting it to zero,

$$\left(P^{-1} + H^{\mathsf{T}}R^{-1}H\right)\hat{x} = P^{-1}\mu + H^{\mathsf{T}}R^{-1}z.$$

Write $\hat{x} = \mu + \delta$ and subtract $(P^{-1} + H^{\mathsf{T}}R^{-1}H)\mu$ from both sides: $(P^{-1} + H^{\mathsf{T}}R^{-1}H)\,\delta = H^{\mathsf{T}}R^{-1}(z - H\mu)$, so $\hat{x} = \mu + K(z - H\mu)$ with $K = (P^{-1} + H^{\mathsf{T}}R^{-1}H)^{-1}H^{\mathsf{T}}R^{-1}$. The Hessian $2(P^{-1} + H^{\mathsf{T}}R^{-1}H) > 0$ confirms a minimum. By the push-through identity $(P^{-1} + H^{\mathsf{T}}R^{-1}H)^{-1}H^{\mathsf{T}}R^{-1} = PH^{\mathsf{T}}(HPH^{\mathsf{T}} + R)^{-1}$ this is the Kalman gain of Chapter 12.

**5.7** Exactly, $\mathbb{E}[y] = \mathbb{E}[x^2] = \sigma^2$ (and $\mathrm{Var}(y) = \mathbb{E}[x^4] - \sigma^4 = 2\sigma^4$). Linearizing $f(x) = x^2$ at the mean $\mu = 0$ gives $f(0) = 0$ and $J = 2\mu = 0$: the predicted mean is 0 and the predicted variance is 0, a deterministic $y$. The linearization sees a function that is flat at the expansion point and misses the curvature entirely. The second-order correction $\frac{1}{2}f''(\mu)\sigma^2 = \sigma^2$ of Section 5.10 accounts for the whole discrepancy (exactly, because $f$ is quadratic). This is the worst case for an EKF: linearizing at a stationary point of the measurement function.

**5.8** The squared Mahalanobis distance of a 2D Gaussian is $\chi^2_2$, whose density $\frac{1}{2}e^{-\gamma/2}$ integrates to $P(\chi^2_2 \le c) = 1 - e^{-c/2}$. The $k\sigma$ ellipse is $d_M^2 = k^2$:

$$P(1\sigma) = 1 - e^{-1/2} = 0.393, \qquad P(2\sigma) = 1 - e^{-2} = 0.865, \qquad P(3\sigma) = 1 - e^{-9/2} = 0.989.$$

Compare 0.683, 0.954 and 0.997 in one dimension (and 0.199, 0.739, 0.971 in three): the more dimensions, the more likely a sample lies outside the "one-sigma" region, because it must be close to the mean in every direction at once.

**5.9** With $\varphi(s) = e^{-s^2/2}/\sqrt{2\pi}$ we have $\varphi'(s) = -s\varphi(s)$. Integrating by parts with $u = s^3$ and $\mathrm{d}v = s\varphi\,\mathrm{d}s = -\mathrm{d}\varphi$,

$$\mathbb{E}[s^4] = \int_{-\infty}^{\infty} s^3 \cdot s\varphi(s)\,\mathrm{d}s = \Big[-s^3\varphi(s)\Big]_{-\infty}^{\infty} + 3\int_{-\infty}^{\infty} s^2\varphi(s)\,\mathrm{d}s = 0 + 3\,\mathbb{E}[s^2].$$

The same step with $u = s$ gives $\mathbb{E}[s^2] = [-s\varphi]_{-\infty}^{\infty} + \int\varphi = 1$. Hence $\mathbb{E}[s^4] = 3$ and $\mathrm{Var}(s^2) = 3 - 1 = 2$, the variance used for $\chi^2_k$.

**5.10** Under the null hypothesis that the predicted variance is right, $99\,s^2/\sigma^2 \sim \chi^2_{99}$, so the ratio $s^2/\sigma^2$ lies in $[\chi^2_{0.025}(99), \chi^2_{0.975}(99)]/99 = [0.741, 1.297]$ with probability 95% (Appendix C). The observed ratio 1.25 is inside the interval: *not* significant at the 5% level (the two-sided $p$-value is about 0.09). With 100 runs, a variance can be off by 25% without the test noticing; the expected ratio 1.25 would leave the interval only from about 140 runs, and a 10% error needs roughly a thousand. Monte Carlo variance checks need many runs (Exercise 17.6).

Chapter 6

# Random Processes, Spectra and Sensor Noise

**In this chapter**

- Describe noise that evolves in time: random sequences, autocorrelation, stationarity, white noise and random walks.
- Understand power spectral densities and why sensor noise is specified in units per $\sqrt{\text{Hz}}$.
- Understand continuous-time white noise, its sampling, and aliasing.
- Derive how integrated noise grows, and how covariance evolves in a linear stochastic system.
- Derive the Allan variance signatures used to identify IMU noise parameters.
- Model colored noise with shaping filters, the reason sensor biases become filter states.

Chapter 5 dealt with random vectors: a fixed number of uncertain quantities. Sensor noise is a different kind of object: a random *signal*, a function of time, whose values at different times may or may not be related. This chapter develops the theory of such random processes, as far as it is needed to understand IMU datasheets, to model sensor errors in a filter, and to discretize those models correctly.

## 6.1 Random sequences

### 6.1.1 Definitions

A *random sequence* (discrete-time random process) is a sequence of random variables $x_0, x_1, x_2, \ldots$, for example the noise added to successive IMU samples. One run of the experiment produces one *sample path*; repeating the experiment produces another. Statistics are taken across this *ensemble* of paths. The *mean function* is $\mu_k = \mathbb{E}[x_k]$ and the *autocovariance*

$$C(k, j) = \mathbb{E}\big[(x_k - \mu_k)(x_j - \mu_j)\big] \tag{6.1}$$

says how strongly the values at two times are related. A sequence is *wide-sense stationary* if its mean is constant and its autocovariance depends only on the lag, $C(k, j) = C(k - j)$: its statistical character does not change with time.

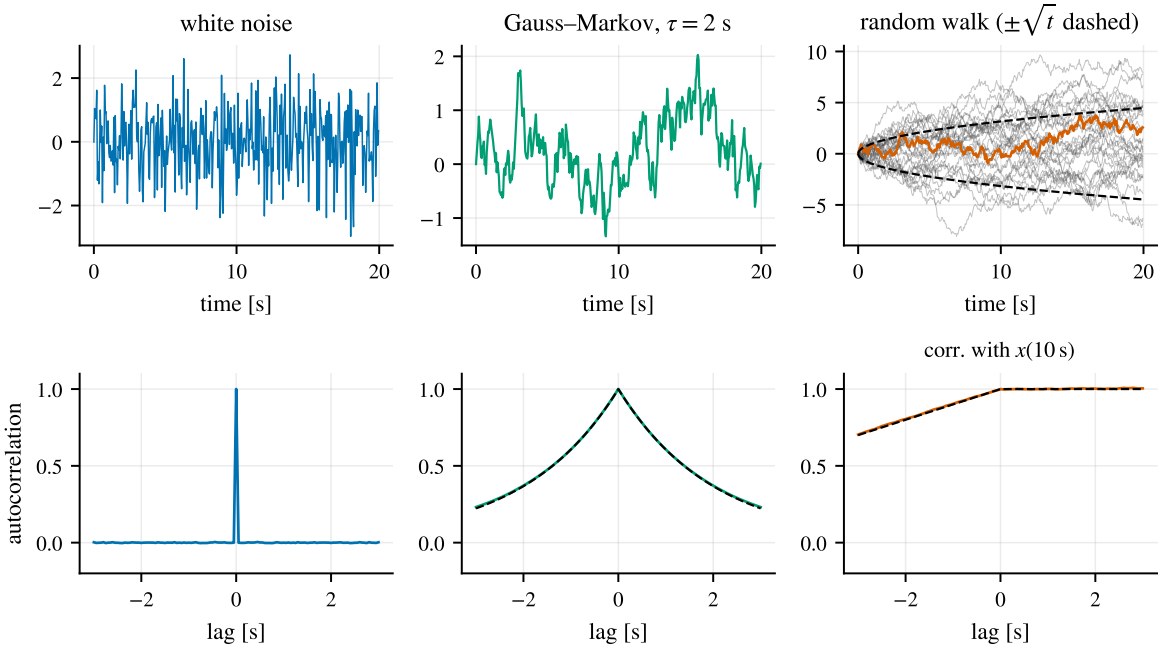



**Figure 6.1:** Sample paths (top) and autocorrelation functions (bottom) of white noise, a first-order Gauss–Markov sequence with correlation time $\tau = 2$ s, and a random walk, all driven by the same white sequence. White noise is uncorrelated with itself at any non-zero lag; the Gauss–Markov sequence forgets its past exponentially; the random walk never forgets and its spread grows like $\sqrt{t}$.

### 6.1.2 Three fundamental sequences

**White noise.** A *white sequence* has zero mean and uncorrelated values: $C(k) = \sigma^2$ for $k = 0$ and 0 otherwise. Each sample carries no information about the others. The measurement noise of a well-behaved sensor is approximately white.

**Random walk.** Summing white noise gives a *random walk*: $x_{k+1} = x_k + w_k$, $x_0 = 0$, with $w_k$ white of variance $\sigma^2$. Then $x_k = \sum_{j<k} w_j$ and, because variances of uncorrelated terms add,

$$\mathrm{Var}(x_k) = k\sigma^2. \tag{6.2}$$

The spread grows like $\sqrt{k}$ without bound, and the sequence is not stationary. Its autocovariance $C(k, j) = \min(k, j)\sigma^2$ shows that it remembers its whole past. Slowly drifting sensor biases are modeled as random walks.

**First-order Gauss–Markov sequence.** Between the two lies $x_{k+1} = a x_k + w_k$ with $|a| < 1$. If the sequence is stationary, taking the variance of both sides gives $V = a^2 V + \sigma^2$, so

$$\mathrm{Var}(x_k) = \frac{\sigma^2}{1 - a^2}, \qquad C(j) = \frac{\sigma^2}{1 - a^2}\, a^{|j|}, \tag{6.3}$$

the second because $x_{k+j} = a^j x_k +$ (noise uncorrelated with $x_k$). The sequence forgets its past exponentially, with a *correlation time* of about $1/(1 - a)$ steps. It is a bounded, slowly varying

error: a useful model for biases that wander but do not diverge, and for many environmental disturbances.

## 6.2 Frequency-domain description

### 6.2.1 Fourier analysis in brief

Every reasonable signal is a superposition of sinusoids. The *Fourier transform*

$$X(f) = \int_{-\infty}^{\infty} x(t)\, e^{-i2\pi f t}\, \mathrm{d}t, \qquad x(t) = \int_{-\infty}^{\infty} X(f)\, e^{i2\pi f t}\, \mathrm{d}f \tag{6.4}$$

gives the complex amplitude $X(f)$ of the component at frequency $f$ (in Hz). Two facts are all we need. First, Parseval's theorem $\int |x(t)|^2 \mathrm{d}t = \int |X(f)|^2 \mathrm{d}f$: energy can be counted in time or in frequency. Second, linear time-invariant systems (filters) act on each frequency independently, multiplying $X(f)$ by a *frequency response* $H(f)$. A low-pass filter has $|H(f)| \approx 1$ at low frequencies and $|H(f)| \approx 0$ at high ones.

### 6.2.2 Power spectral density

A random signal has infinite energy (it goes on forever), but finite *power*. Its *power spectral density* (PSD) describes how that power is distributed over frequency.

**Definition 6.1** (Power spectral density)**.** For a wide-sense stationary process with autocovariance $C(\tau) = \mathbb{E}[x(t+\tau)x(t)]$ (zero mean), the (two-sided) PSD is

$$S(f) = \int_{-\infty}^{\infty} C(\tau)\, e^{-i2\pi f \tau}\, \mathrm{d}\tau. \tag{6.5}$$

This relation between the autocovariance and the PSD is the *Wiener–Khinchin theorem*. Evaluating the inverse transform at $\tau = 0$ shows that the variance is the total area under the PSD:

$$\mathrm{Var}(x) = C(0) = \int_{-\infty}^{\infty} S(f)\, \mathrm{d}f. \tag{6.6}$$

So $S(f)\,\mathrm{d}f$ is the contribution of the frequency band $[f, f + \mathrm{d}f]$ to the variance, and the PSD has units of $[x]^2/\mathrm{Hz}$. Passing the process through a filter with frequency response $H(f)$ multiplies its PSD by $|H(f)|^2$.

**Pitfall: one-sided and two-sided PSDs**

Engineers often use a *one-sided* PSD defined only for $f \geq 0$ and equal to twice the two-sided one, so that the variance is $\int_0^{\infty} S_1(f)\,\mathrm{d}f$. Datasheets rarely say which convention they use, and the two differ by a factor of $\sqrt{2}$ in the noise density. These notes use the convention of the EuRoC calibration files and of most of the VIO literature: a continuous white noise $w$ with $\mathbb{E}[w(t)w(s)] = \sigma^2\delta(t-s)$, i.e. two-sided PSD $\sigma^2$.

## 6.3 Continuous-time white noise

**Definition 6.2** (Continuous-time white noise)**.** A zero-mean process $w(t) \in \mathbb{R}^n$ is white with *noise density* (intensity) $Q_c$ if $\mathbb{E}[w(t)\,w(s)^\mathsf{T}] = Q_c\,\delta(t-s)$, where $\delta$ is the Dirac delta. For a scalar process we write $Q_c = \sigma^2$ and call $\sigma$ the noise density.

Continuous white noise is an idealization: its PSD is flat at all frequencies, so its variance $\int S\,\mathrm{d}f$ is infinite. Physical noise is white only up to some bandwidth. What makes the idealization useful is that its *integrals* are perfectly well behaved: the integral of white noise over an interval of length $T$ is a zero-mean random variable with variance

$$\operatorname{Var}\left(\int_0^T w(t)\,\mathrm{d}t\right) = \int_0^T \int_0^T \sigma^2 \delta(t-s)\,\mathrm{d}s\,\mathrm{d}t = \sigma^2 T. \tag{6.7}$$

Since $\delta$ has units of $1/\text{time}$, $\sigma$ has units of $[w]\cdot\sqrt{\text{s}} = [w]/\sqrt{\text{Hz}}$. For a gyroscope, $[w] = \text{rad/s}$, so its noise density is in $\text{rad/s}/\sqrt{\text{Hz}}$, the units of `gyroscope_noise_density` in EuRoC's `sensor.yaml`.

**From continuous to discrete noise.** A digital sensor reports samples every $\Delta t$. If each sample is the average of the continuous white input over its interval, which an anti-aliasing filter approximates, the sample noise has variance

$$\operatorname{Var}\left(\frac{1}{\Delta t}\int_0^{\Delta t} w(s)\,\mathrm{d}s\right) = \frac{\sigma^2}{\Delta t}, \qquad \sigma_{\text{discrete}} = \frac{\sigma}{\sqrt{\Delta t}}. \tag{6.8}$$

The frequency-domain view agrees: an ideal low-pass filter that keeps the band $|f| < f_s/2$ (with $f_s = 1/\Delta t$) passes a variance of $\int_{-f_s/2}^{f_s/2} \sigma^2\,\mathrm{d}f = \sigma^2 f_s = \sigma^2/\Delta t$. Sampling faster does not reduce the noise per unit time; it merely spreads it over more samples, each noisier. For EuRoC's gyroscope, $\sigma_g = 1.6968 \times 10^{-4}$ $\text{rad/s}/\sqrt{\text{Hz}}$ at 200 Hz gives a per-sample standard deviation of $2.4 \times 10^{-3}$ rad/s.

Conversely, a random walk driven by white noise, $\dot{b} = w$, gains variance $\sigma^2\Delta t$ over a step $\Delta t$, so its exact discretization is $b_{k+1} = b_k + \sqrt{\Delta t}\,\sigma\,s_k$ with $s_k \sim \mathcal{N}(0,1)$. The two conversions go in opposite directions, $\sigma/\sqrt{\Delta t}$ for the sample noise and $\sigma\sqrt{\Delta t}$ for the walk; confusing them is a classic error in noise simulators.

## 6.4 Sampling and aliasing

**Theorem 6.3** (Sampling theorem, Nyquist–Shannon)**.** *A signal containing no frequencies at or above $f_s/2$ is completely determined by its samples at rate $f_s$. The frequency $f_s/2$ is the* Nyquist frequency.

A component at a frequency $f$ above the Nyquist frequency does not disappear when sampled: it masquerades as a lower frequency $|f - k f_s|$ for the integer $k$ that brings it into $[0, f_s/2]$ (Figure 6.2). This *aliasing* cannot be undone after sampling, so it must be prevented before, by an analog or digital *anti-aliasing* low-pass filter. IMUs contain such filters, but strong vibration near or above the sampling rate (propellers at hundreds of Hz) can still alias into low frequencies and appear as bias-like errors. The same principle governs images: a

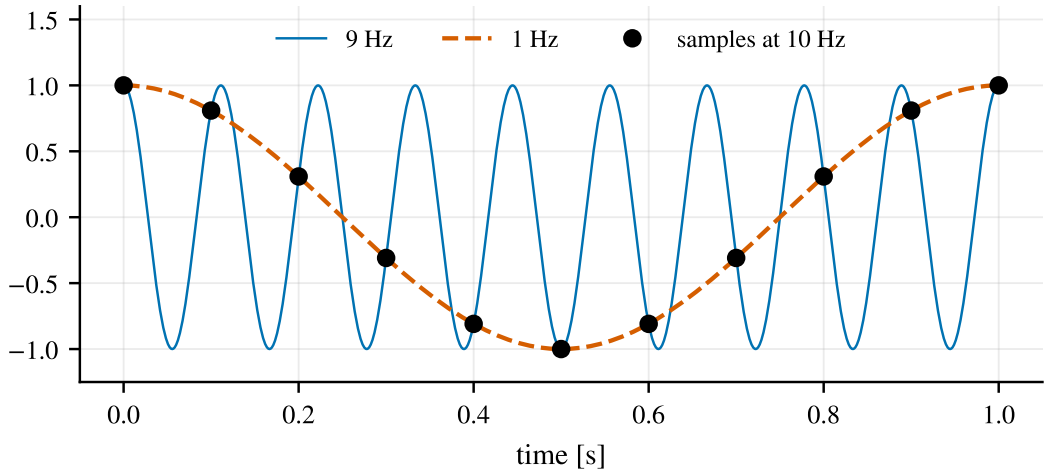



**Figure 6.2:** Aliasing. A 9 Hz sinusoid sampled at 10 Hz (dots) produces exactly the same samples as a 1 Hz sinusoid (dashed). After sampling, the two are indistinguishable.

camera samples a scene spatially, and an image must be blurred before it is down-sampled, or fine textures turn into false coarse patterns (Chapter 21).

## 6.5 Integrated noise

**Proposition 6.4** (Integrated white noise). *Let $w$ be scalar white noise with density $\sigma$. The $m$-fold integral $I_m(t) = \int_0^t \int_0^{t_1} \cdots \int_0^{t_{m-1}} w(t_m)\,\mathrm{d}t_m \cdots \mathrm{d}t_1$ has zero mean and*

$$\operatorname{Var}\big(I_m(t)\big) = \sigma^2 \,\frac{t^{2m-1}}{(2m-1)\,\big((m-1)!\big)^2}. \tag{6.9}$$

*For $m = 1, 2, 3, 4$ this gives $\sigma^2 t$, $\sigma^2 t^3/3$, $\sigma^2 t^5/20$ and $\sigma^2 t^7/252$.*

*Proof.* By Cauchy's formula for repeated integration (proved by induction, exchanging the order of integration), $I_m(t) = \int_0^t \frac{(t-s)^{m-1}}{(m-1)!}\, w(s)\,\mathrm{d}s$. For a weighted integral $\int g(s) w(s)\,\mathrm{d}s$ of white noise, $\operatorname{Var} = \iint g(s)g(s')\,\sigma^2\delta(s-s')\,\mathrm{d}s\,\mathrm{d}s' = \sigma^2 \int g(s)^2\,\mathrm{d}s$. Here $\int_0^t (t-s)^{2m-2}\,\mathrm{d}s/((m-1)!)^2 = t^{2m-1}/((2m-1)((m-1)!)^2)$. ∎

The single integral $I_1$ is the continuous random walk, or *Wiener process*, whose standard deviation grows like $\sqrt{t}$. Integrating accelerometer white noise twice into position gives $\sigma_a^2 t^3/3$: position uncertainty grows like $t^{3/2}$. Each further integration adds two powers of $t$ to the variance. Chapter 17 uses this proposition to explain how fast an inertial navigator degrades.

## 6.6 Linear stochastic differential equations

Most noise models in navigation are linear systems driven by white noise:

$$\dot{x}(t) = F(t)\,x(t) + G(t)\,w(t), \qquad \mathbb{E}[w(t)w(s)^{\mathsf{T}}] = Q_c\,\delta(t-s). \tag{6.10}$$

Because white noise is so irregular, such equations are made rigorous by stochastic calculus. For linear systems, however, the results we need follow from a simple limiting argument.

**Proposition 6.5** (Mean and covariance propagation). *For* (6.10)*, the mean* $m(t) = \mathbb{E}[x(t)]$ *and covariance* $P(t)$ *evolve as*

$$\dot{m} = Fm, \qquad \dot{P} = FP + PF^{\mathsf{T}} + GQ_cG^{\mathsf{T}}, \tag{6.11}$$

*with solution* $P(t) = \Phi(t,t_0)P(t_0)\Phi(t,t_0)^{\mathsf{T}} + \int_{t_0}^{t} \Phi(t,s)G(s)Q_cG(s)^{\mathsf{T}}\Phi(t,s)^{\mathsf{T}}\,\mathrm{d}s$.

*Proof.* Over a short interval $h$, $x(t+h) = (I + Fh)x(t) + \int_t^{t+h} Gw\,\mathrm{d}s + O(h^2)$, and the noise integral is zero-mean with covariance $GQ_cG^{\mathsf{T}}h$ and uncorrelated with $x(t)$. By Proposition 5.7, $P(t+h) = (I+Fh)P(I+Fh)^{\mathsf{T}} + GQ_cG^{\mathsf{T}}h + O(h^2) = P + (FP + PF^{\mathsf{T}} + GQ_cG^{\mathsf{T}})h + O(h^2)$. Subtract $P(t)$, divide by $h$ and let $h \to 0$. The integral form is verified by differentiating it (Proposition 4.7). ∎

Equation (6.11) is the *Lyapunov differential equation*. The first two terms move and shape the existing uncertainty with the dynamics; the last term pumps in new uncertainty from the noise. Its integral form over one time step is exactly the discrete process noise covariance $Q_d$ of the Kalman filter (Chapters 11 and 12). For a stable time-invariant system, $P$ approaches the solution of the algebraic Lyapunov equation $0 = FP + PF^{\mathsf{T}} + GQ_cG^{\mathsf{T}}$.

### 6.6.1 The continuous Gauss–Markov process

The scalar system $\dot{x} = -x/\tau + w$ with noise density $\sigma$ is the continuous counterpart of the Gauss–Markov sequence. Its stationary variance solves $0 = -2P/\tau + \sigma^2$:

$$P_\infty = \frac{\sigma^2\tau}{2}, \qquad C(\Delta t) = P_\infty\, e^{-|\Delta t|/\tau}, \qquad S(f) = \frac{\sigma^2\tau^2}{1 + (2\pi f\tau)^2}. \tag{6.12}$$

(The PSD is the white input PSD $\sigma^2$ times $|H(f)|^2$ for the system's frequency response $H(f) = 1/(i2\pi f + 1/\tau)$; integrating it over all frequencies returns $P_\infty$.) The autocovariance decays with time constant $\tau$, and the PSD is flat up to the corner frequency $1/(2\pi\tau)$ and falls off beyond it. Its exact discretization over $\Delta t$ is $x_{k+1} = e^{-\Delta t/\tau}x_k + w_k$ with $\mathrm{Var}(w_k) = P_\infty(1 - e^{-2\Delta t/\tau})$. As $\tau \to \infty$ it becomes a random walk; as $\tau \to 0$ with the low-frequency level $\sigma^2\tau^2$ of its PSD held fixed, it becomes white noise.

## 6.7 Colored noise and state augmentation

A Kalman filter assumes that its process and measurement noises are white. When a disturbance is *colored* (correlated in time), the standard remedy is to model it as the output of a linear system driven by white noise, a *shaping filter*, and to add the state of that system to the filter state. A sensor bias that drifts as a random walk is exactly this: $b$ is colored, but $\dot{b} = w_b$ is white-driven, so $b$ becomes part of the state. This is why IMU biases appear in the state vector of every inertial filter (Chapter 15). Ignoring the correlation, and treating a slowly varying error as white, makes the filter believe that errors average out when they do not, and leads to overconfidence.

## 6.8 The Allan variance

How are the noise densities of a sensor measured? Record it at rest for hours and compute its *Allan variance*, a tool developed for characterizing atomic clocks that separates noise processes by their time scale.

**Definition 6.6** (Allan variance)**.** Split a record of rate samples $y(t)$ into consecutive clusters of duration $\tau$, and let $\bar{y}_k(\tau)$ be the average over cluster $k$. The Allan variance is half the mean squared difference of consecutive cluster averages:

$$\sigma_A^2(\tau) = \tfrac{1}{2}\,\mathbb{E}\big[(\bar{y}_{k+1}(\tau) - \bar{y}_k(\tau))^2\big]. \tag{6.13}$$

In practice it is computed from the integrated signal $\theta(t) = \int_0^t y$ (for a gyroscope, the angle), since $\bar{y}_{k+1} - \bar{y}_k = (\theta_{k+2} - 2\theta_{k+1} + \theta_k)/\tau$ with $\theta_j = \theta(j\tau)$. The *overlapping* estimator averages over all starting times rather than only disjoint clusters, which uses the data more efficiently.

**Proposition 6.7** (Allan variance signatures)**.** *For white noise of density $\sigma$, $\sigma_A^2(\tau) = \sigma^2/\tau$. For a random walk $\dot{b} = w_b$ with density $\sigma_b$, $\sigma_A^2(\tau) = \sigma_b^2\tau/3$.*

*Proof. White noise.* Each cluster average is an integral of white noise divided by $\tau$, with variance $\sigma^2\tau/\tau^2 = \sigma^2/\tau$; consecutive averages involve disjoint intervals and are uncorrelated, so their difference has variance $2\sigma^2/\tau$, and half of it is $\sigma^2/\tau$. *Random walk.* Write $b(t) = \int_0^t w_b$. The difference of two consecutive cluster averages is $D = \frac{1}{\tau}\int_\tau^{2\tau} b\,\mathrm{d}t - \frac{1}{\tau}\int_0^{\tau} b\,\mathrm{d}t$. Substituting $b$ and exchanging the order of integration expresses $D$ as $\frac{1}{\tau}\int_0^{2\tau} h(s)w_b(s)\,\mathrm{d}s$ with $h(s) = s$ for $s \le \tau$ and $h(s) = 2\tau - s$ for $s > \tau$ (a triangular weight). Its variance is $\frac{\sigma_b^2}{\tau^2}\big(\int_0^\tau s^2\mathrm{d}s + \int_\tau^{2\tau}(2\tau - s)^2\mathrm{d}s\big) = \frac{2}{3}\sigma_b^2\tau$, and half of it is $\sigma_b^2\tau/3$. ∎

On a log-log plot of the *Allan deviation* $\sigma_A(\tau)$, independent noise processes therefore appear as straight lines with characteristic slopes:

| Process | $\sigma_A^2(\tau)$ | slope of $\sigma_A$ |
|---|---|---|
| quantization noise | $3Q^2/\tau^2$ | $-1$ |
| white noise (density $\sigma$) | $\sigma^2/\tau$ | $-\frac{1}{2}$ |
| bias instability ($B$) | $\approx (0.664B)^2$ | $0$ |
| bias random walk (density $\sigma_b$) | $\sigma_b^2\tau/3$ | $+\frac{1}{2}$ |
| rate ramp ($R$) | $R^2\tau^2/2$ | $+1$ |

The white-noise density is read off the $-\frac{1}{2}$ line at $\tau = 1$ s, and the random-walk density off the $+\frac{1}{2}$ line at $\tau = 3$ s. The minimum of the curve marks the averaging time beyond which a stationary sensor's bias starts to wander; its height is related to the *bias instability*, a flicker-noise floor that neither white noise nor a random walk describes exactly.

Figure 6.3 shows the procedure on simulated data with the EuRoC parameters of Chapter 15. On real sensors, a flat bias-instability region appears near the minimum, which the random-walk model only approximates. The IEEE standard procedure [30] and El-Sheimy et al. [14] give practical details.

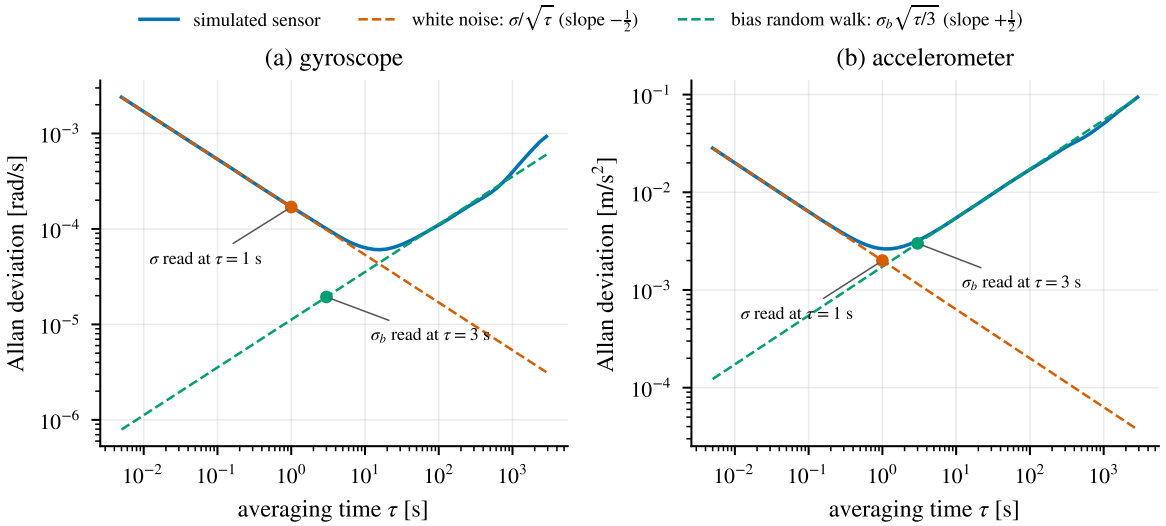



**Figure 6.3:** Allan deviation of a simulated 4-hour static recording with EuRoC's IMU noise parameters. The $-\frac{1}{2}$ slope of white noise dominates short averaging times and the $+\frac{1}{2}$ slope of the bias random walk dominates long ones. Reading the asymptotes at $\tau = 1$ s and $\tau = 3$ s recovers the densities.

**Key takeaways**

- White noise is uncorrelated in time; a random walk is its running sum, with variance growing linearly; a Gauss–Markov process forgets its past exponentially.
- The PSD distributes a process's variance over frequency; noise densities are square roots of PSDs, in units per $\sqrt{\text{Hz}}$.
- Sampling white noise of density $\sigma$ at period $\Delta t$ gives per-sample noise $\sigma/\sqrt{\Delta t}$; a random walk gains $\sigma_b\sqrt{\Delta t}$ per step.
- Frequencies above Nyquist alias; filter before you sample or down-sample.
- The $m$-fold integral of white noise has variance growing like $t^{2m-1}$.
- Covariance in a linear stochastic system obeys $\dot{P} = FP + PF^{\mathsf{T}} + GQ_cG^{\mathsf{T}}$.
- Colored noise is modeled with a shaping filter whose state joins the filter state: this is why biases are states.
- The Allan deviation separates white noise (slope $-\frac{1}{2}$, read at 1 s) from bias random walk (slope $+\frac{1}{2}$, read at 3 s).

## Exercises

**6.1** Show that the autocovariance of a random walk is $C(k, j) = \min(k, j)\,\sigma^2$.

**6.2** For the Gauss–Markov sequence with $a = 0.99$ and $\sigma = 1$, compute the stationary standard deviation and the lag at which the correlation drops below $1/e$.

**6.3** A 1 kHz accelerometer has white noise of $2 \times 10^{-3}$ m/s$^2/\sqrt{\text{Hz}}$. What is the standard deviation of a single sample? Of the average of 1000 consecutive samples? Of a single

sample of the same sensor read at 100 Hz?

**6.4** A 105 Hz vibration is sampled at 100 Hz. At what frequency does it appear?

**6.5** Verify Proposition 6.4 by Monte Carlo for $m = 2$ and $m = 3$, simulating at 200 Hz for 10 s with 1000 runs.

**6.6** Solve the Lyapunov equation for the double integrator $\dot{p} = v$, $\dot{v} = w$ with $P(0) = 0$ and verify that $P_{pp}(t) = \sigma^2 t^3/3$.

**6.7** Derive the stationary variance and the exact discretization of the continuous Gauss–Markov process.

**6.8** Simulate 2 hours of a gyro with EuRoC parameters, compute the overlapping Allan deviation, and recover $\sigma_g$ and $\sigma_{b_g}$ from the asymptotes. How long a recording is needed to estimate $\sigma_{b_g}$ to 10%?

## Solutions to the exercises

**6.1** With $x_k = \sum_{i<k} w_i$ and $x_j = \sum_{l<j} w_l$,

$$C(k,j) = \mathbb{E}[x_k x_j] = \sum_{i<k}\sum_{l<j} \mathbb{E}[w_i w_l] = \sum_{i<k}\sum_{l<j} \sigma^2 \delta_{il} = \sigma^2 \sum_{i<\min(k,j)} 1 = \min(k,j)\,\sigma^2.$$

Only the shared terms of the two sums are correlated; the later sum contains the whole earlier one, which is why a random walk "remembers" its past.

**6.2** The stationary variance is $\sigma^2/(1-a^2) = 1/0.0199 = 50.3$, a standard deviation of 7.09: an input of unit size per step builds up a seven times larger wandering error. The correlation $a^{|j|}$ drops below $1/e$ when $|j| > 1/(-\ln a) = 99.5$, i.e. after 100 steps, consistent with the correlation time $1/(1-a) = 100$ steps.

**6.3** By (6.8) a single sample at $\Delta t = 1$ ms has standard deviation $\sigma/\sqrt{\Delta t} = 2\times10^{-3}\sqrt{1000} = 0.063$ m/s$^2$. The average of 1000 consecutive samples (one second) has $0.063/\sqrt{1000} = 2\times10^{-3}$ m/s$^2$, which is $\sigma/\sqrt{T}$ with $T = 1$ s: averaging over a time $T$ always gives $\sigma/\sqrt{T}$, however the samples are spaced. Read at 100 Hz with its anti-aliasing filter set accordingly, each sample averages 10 ms and has $\sigma\sqrt{100} = 0.02$ m/s$^2$. (If the 100 Hz stream were obtained by merely keeping every tenth 1 kHz sample, each sample would keep the full 0.063 m/s$^2$, and high-frequency noise would alias into the band.)

**6.4** The alias frequency is $|f - k f_s|$ for the integer $k$ that brings it into $[0, f_s/2] = [0, 50]$ Hz: $|105 - 100| = 5$ Hz. A propeller vibration just above the sampling rate appears as a slow 5 Hz oscillation, indistinguishable from real motion.

**6.5** Simulate $R = 1000$ runs of white noise with per-sample standard deviation $\sigma/\sqrt{\Delta t}$ at $\Delta t = 5$ ms, integrate by cumulative sums (`np.cumsum(w, axis=1) * dt` once, twice and three times), and compute the sample variance of each integral at $t = 10$ s. One run of this experiment with $\sigma = 1$ gives

| $m$ | Monte Carlo variance | theory $\sigma^2 t^{2m-1}/((2m-1)((m-1)!)^2)$ | ratio |
|---|---|---|---|
| 1 | 9.78 | 10 | 0.978 |
| 2 | 327.2 | 333.3 | 0.982 |
| 3 | 4964 | 5000 | 0.993 |

With 1000 runs the variance ratio has a 95% band of $\pm1.96\sqrt{2/999} = \pm8.8\%$ (Section 5.8), so all three agree with Proposition 6.4. The discretization error of the rectangle rule is $O(\Delta t/t) \approx 0.05\%$, far below the sampling error.

**6.6** With $x = (p, v)$, $F = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$, $G = \begin{bmatrix} 0 \\ 1 \end{bmatrix}$ and $Q_c = \sigma^2$, the three distinct entries of $\dot P = FP + PF^{\mathsf T} + GQ_cG^{\mathsf T}$ are

$$\dot P_{pp} = 2P_{pv}, \qquad \dot P_{pv} = P_{vv}, \qquad \dot P_{vv} = \sigma^2.$$

Integrating from $P(0) = 0$ in cascade: $P_{vv} = \sigma^2 t$, $P_{pv} = \sigma^2 t^2/2$, $P_{pp} = \sigma^2 t^3/3$, in agreement with $m = 2$ of Proposition 6.4. The correlation coefficient $P_{pv}/\sqrt{P_{pp}P_{vv}} =$

$\sqrt{3}/2$ is constant: position and velocity errors are strongly correlated, because the position error is the integral of the velocity error.

**6.7** For $\dot{x} = -x/\tau + w$, the Lyapunov equation is $\dot{P} = -2P/\tau + \sigma^2$, whose solution is

$$P(t) = e^{-2t/\tau}P(0) + \frac{\sigma^2\tau}{2}\left(1 - e^{-2t/\tau}\right),$$

approaching $P_\infty = \sigma^2\tau/2$. For the discretization, the scalar version of Theorem 4.5 gives $x(t+\Delta t) = e^{-\Delta t/\tau}x(t) + \int_0^{\Delta t} e^{-(\Delta t - s)/\tau} w(t+s)\,\mathrm{d}s$. The noise integral is independent of $x(t)$, with variance $\sigma^2 \int_0^{\Delta t} e^{-2(\Delta t - s)/\tau}\,\mathrm{d}s = \frac{\sigma^2\tau}{2}\left(1 - e^{-2\Delta t/\tau}\right) = P_\infty\left(1 - e^{-2\Delta t/\tau}\right)$. Hence $x_{k+1} = e^{-\Delta t/\tau}x_k + w_k$ with $\mathrm{Var}(w_k) = P_\infty(1 - e^{-2\Delta t/\tau})$, exact for any $\Delta t$. Two checks: if $x_k$ has variance $P_\infty$, so does $x_{k+1}$ (stationarity is preserved); and for $\Delta t \ll \tau$, $\mathrm{Var}(w_k) \approx \sigma^2\Delta t$, the random-walk increment.

**6.8** Simulate the gyro as white noise of density $\sigma_g$ plus a random walk of density $\sigma_{b_g}$ (Section 6.3 gives both per-sample conversions), integrate the rate to an angle $\theta$, and evaluate the overlapping Allan variance $\sigma_A^2(\tau) = \langle(\theta_{i+2m} - 2\theta_{i+m} + \theta_i)^2\rangle/(2\tau^2)$, $\tau = m\Delta t$, on a log-spaced grid of $\tau$ up to a quarter of the record. For a 2-hour record the curve has the two predicted slopes, with its minimum near $\tau = 16$ s, close to the crossover $\tau = \sqrt{3}\,\sigma_g/\sigma_{b_g} = 15$ s where the two terms are equal. Fitting $\sigma_A^2 = \sigma_g^2/\tau + \sigma_{b_g}^2\,\tau/3$ (in log space, weighting each $\tau$ by $\sqrt{T/\tau}$, since longer clusters are fewer and noisier) recovers $\sigma_g$ to within about 1% and $\sigma_{b_g}$ to within 5–10%. Repeating the experiment many times gives the scatter of the estimate of $\sigma_{b_g}$ as a function of record length:

| record length | 0.5 h | 1 h | 2 h | 4 h | 8 h |
|---|---|---|---|---|---|
| relative standard deviation of $\hat{\sigma}_{b_g}$ | 13% | 9% | 6% | 4.5% | 3% |

About one hour is needed for 10% (one sigma). The reason is simple: the random walk dominates only for $\tau \gtrsim 50$ s, and an Allan variance computed from $K$ independent clusters has a relative error of about $\sqrt{2/K}$ in variance, half that in deviation; reaching 10% in deviation from a single $\tau$ requires $K \approx 50$ clusters of a hundred seconds or more, and combining several $\tau$ lowers this somewhat. Real sensors add bias instability and temperature drift, which is why calibration recordings usually last several hours.

Chapter 7

# Rotations, Quaternions and Rigid-Body Kinematics

**In this chapter**

- Read and write frame-annotated transformations such as $R_{wb}$, $p_{wb}$ and $T_{bc}$ without ambiguity, and catch frame bugs with the adjacency rule.
- Understand rotations in the plane, then in space: rotation matrices, axis-angle and Rodrigues' formula.
- Understand Euler angles, intrinsic versus extrinsic sequences, their conversions, and why they are banned from the estimator.
- Derive Hamilton quaternion algebra and its rotation formula; convert between quaternions and matrices; interpolate; and translate formulas from the JPL convention.
- Derive the kinematics of rotating bodies: $\dot{R} = R[\omega]_\times$, $\dot{q} = \frac{1}{2} q \otimes [0, \omega]$, the transport theorem and the Coriolis acceleration, and quantify the effects of the Earth's rotation.

## 7.1 Frames and notation

A *frame* is an origin together with three orthonormal, right-handed axes. Three frames appear in this project (Figure 7.1).

**Frozen convention: frames, AGENTS.md C1**

- $W$, the **world** frame: fixed, gravity-aligned with $z$ pointing up, the frame of the ground truth (EuRoC calls it `R`). Gravity is $g_w = [0, 0, -9.81]^\mathsf{T}$ m/s$^2$.
- $B$, the **body** frame: the IMU frame `imu0` (EuRoC's `S` in `imu0`).
- $C$, the left **camera** frame `cam0`: origin at the optical center, $z$ along the optical axis, $x$ to the right and $y$ down in the image.

$R_{wb}$ (or $q_{wb}$) maps body-frame coordinates to world-frame coordinates, $v_w = R_{wb} v_b$. $p_{wb}$ is the position of the origin of $B$ expressed in $W$. $v_{wb}$ is the velocity of $B$ relative to $W$, expressed in $W$. $T_{bc} = (R_{bc}, p_{bc})$ maps camera points into the body frame, $p_b = R_{bc} p_c + p_{bc}$; it is `T_BS` from `cam0/sensor.yaml`. A world-to-body rotation is never used as a state.

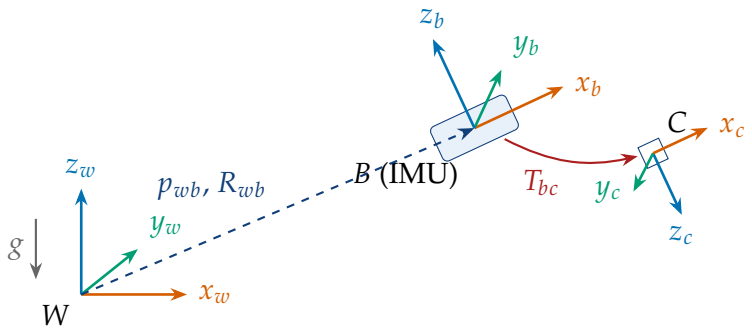



**Figure 7.1:** The world frame $W$ (gravity-aligned, $z$ up), the body/IMU frame $B$ moving with the vehicle, and the camera frame $C$ rigidly attached to the body through the constant extrinsic calibration $T_{bc}$.

### 7.1.1 Reading subscripts

The naming rule `<quantity>_<to><from>` makes products self-checking. $R_{wb}$ takes a vector *from $B$ to $W$*. Composition chains frames like dominoes:

$$R_{wc} = R_{wb}\, R_{bc}, \qquad v_w = R_{wb}\, R_{bc}\, v_c. \tag{7.1}$$

**Key idea: the adjacency rule**

In a valid product, adjacent subscripts match: $R_{w\underline{b}}\, R_{\underline{b}c}$. A product such as $R_{wb}R_{cb}$ has mismatched neighbors and is a bug. The fix is a transpose, $R_{wb}R_{cb}^{\mathsf{T}} = R_{wb}R_{bc}$, since $R_{bc} = R_{cb}^{-1} = R_{cb}^{\mathsf{T}}$. Apply the rule to every line of code that multiplies rotations or transforms points.

### 7.1.2 Active and passive views

A rotation matrix can be read in two ways. In the *passive* view, $R_{wb}$ re-expresses the same physical vector in another frame: $v_w$ and $v_b$ are coordinates of one arrow (Section 2.7). In the *active* view, $R_{wb}$ rotates the world axes onto the body axes: its columns are the body axes $x_b, y_b, z_b$ expressed in world coordinates. Both readings describe the same matrix:

$$R_{wb} = \begin{bmatrix} x_b^{(w)} & y_b^{(w)} & z_b^{(w)} \end{bmatrix}. \tag{7.2}$$

This gives a quick sanity check when debugging: the third column of $R_{wb}$ is the body $z$-axis in world coordinates. For a level vehicle whose $z$-axis points up, it is $[0, 0, 1]^{\mathsf{T}}$; its third row is the world vertical expressed in the body frame.

## 7.2 Rotations in the plane

Planar rotations contain most of the ideas of this chapter in their simplest form. The rotation by $\theta$ is (Example 2.16)

$$R(\theta) = \begin{bmatrix} \cos\theta & -\sin\theta \\ \sin\theta & \cos\theta \end{bmatrix}. \tag{7.3}$$

Rotations compose by adding angles, $R(\alpha)R(\beta) = R(\alpha+\beta)$ (multiply out and use the angle-addition formulas), so planar rotations commute. The angle is a perfect coordinate: $R(\theta)$ is determined by $\theta$, and every planar rotation is $R(\theta)$ for a $\theta$ that is unique up to multiples of $2\pi$. The only subtlety is wrap-around: angles must be compared modulo $2\pi$, which is why the difference between two headings is computed as $\operatorname{atan2}(\sin(\theta_2-\theta_1), \cos(\theta_2-\theta_1))$ rather than $\theta_2 - \theta_1$.

Identifying the plane with the complex numbers, rotation by $\theta$ is multiplication by $e^{i\theta} = \cos\theta + i\sin\theta$. Unit complex numbers compose by multiplication, and their angles add. Quaternions (Section 7.6) are the three-dimensional generalization of this idea, with one crucial difference: in three dimensions, rotations do not commute.

## 7.3 Rotation matrices and SO(3)

**Definition 7.1** (Special orthogonal group)**.** $\mathrm{SO}(3) = \{R \in \mathbb{R}^{3\times 3} : R^{\mathsf{T}}R = I,\ \det R = +1\}$.

Orthogonality ($R^{\mathsf{T}}R = I$) means $R$ preserves lengths and angles; $\det R = +1$ excludes reflections, which would turn a right-handed frame into a left-handed one (Section 2.7). The set is closed under multiplication and inversion, $R^{-1} = R^{\mathsf{T}}$, so it is a *group*. A rotation matrix has nine entries but only three degrees of freedom: orthonormality imposes six constraints (three unit lengths, three orthogonalities). This redundancy is why SO(3) is a curved three-dimensional surface inside the nine-dimensional space of matrices rather than a vector space; the sum of two rotation matrices is not a rotation matrix.

The elementary rotations about the coordinate axes follow from the planar case:

$$R_x(\alpha) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & c_\alpha & -s_\alpha \\ 0 & s_\alpha & c_\alpha \end{bmatrix}, \quad R_y(\alpha) = \begin{bmatrix} c_\alpha & 0 & s_\alpha \\ 0 & 1 & 0 \\ -s_\alpha & 0 & c_\alpha \end{bmatrix}, \quad R_z(\alpha) = \begin{bmatrix} c_\alpha & -s_\alpha & 0 \\ s_\alpha & c_\alpha & 0 \\ 0 & 0 & 1 \end{bmatrix}, \tag{7.4}$$

with $c_\alpha = \cos\alpha$, $s_\alpha = \sin\alpha$. (The signs of $R_y$ look reversed but are not: in the $z$-$x$ plane, ordered cyclically after $y$, it is the usual planar rotation.) Rotations in space do not commute: $R_x(90^\circ)R_y(90^\circ) \neq R_y(90^\circ)R_x(90^\circ)$. Try it with a book.

## 7.4 Axis-angle and Rodrigues' formula

By Euler's theorem (Theorem 2.26), every rotation is a rotation by some angle $\theta \in [0,\pi]$ about some unit axis $u$. The pair $(u,\theta)$ is the *axis-angle* representation, and $\phi = \theta u \in \mathbb{R}^3$ is the *rotation vector*: its direction is the axis and its length the angle. The rotation vector is the central object of Chapter 8.

**Theorem 7.2** (Rodrigues' rotation formula)**.** *The rotation by angle $\theta$ about the unit axis $u$ is*

$$R = I + \sin\theta\,[u]_\times + (1-\cos\theta)\,[u]_\times^2 = \cos\theta\, I + (1-\cos\theta)\,uu^{\mathsf{T}} + \sin\theta\,[u]_\times. \tag{7.5}$$

*Geometric proof.* Split any vector into components parallel and perpendicular to the axis (Proposition 2.9), $v = v_\parallel + v_\perp$ with $v_\parallel = uu^{\mathsf{T}}v$. Rotation leaves $v_\parallel$ unchanged and rotates $v_\perp$

by $\theta$ within the plane spanned by $v_\perp$ and $u \times v_\perp = u \times v$ (a vector of the same length, rotated 90° about $u$):

$$Rv = v_\parallel + \cos\theta\, v_\perp + \sin\theta\, u \times v.$$

Substituting $v_\perp = v - uu^\mathsf{T}v = -[u]_\times^2 v$ (from (2.10) with $\|u\| = 1$) and $u \times v = [u]_\times v$ gives $Rv = (I + \sin\theta[u]_\times + (1 - \cos\theta)[u]_\times^2)v$. ∎

*Algebraic proof.* The rotation about $u$ at unit angular rate satisfies $\dot{R} = [u]_\times R$ (Section 7.8), so $R(\theta) = \exp(\theta[u]_\times)$ by Theorem 4.5. With $[u]_\times^3 = -[u]_\times$ from (2.11), all odd powers of $[u]_\times$ are $\pm[u]_\times$ and all even powers (except the zeroth) are $\pm[u]_\times^2$, so the exponential series regroups as

$$\exp(\theta[u]_\times) = I + \left(\theta - \tfrac{\theta^3}{3!} + \tfrac{\theta^5}{5!} - \cdots\right)[u]_\times + \left(\tfrac{\theta^2}{2!} - \tfrac{\theta^4}{4!} + \cdots\right)[u]_\times^2,$$

and the two series are $\sin\theta$ and $1 - \cos\theta$. ∎

Two consequences of (7.5) recover $(u, \theta)$ from $R$. Taking the trace (using $\operatorname{tr}[u]_\times = 0$ and $\operatorname{tr}[u]_\times^2 = -2$) and the skew-symmetric part,

$$\operatorname{tr} R = 1 + 2\cos\theta, \qquad R - R^\mathsf{T} = 2\sin\theta\,[u]_\times. \tag{7.6}$$

Chapter 8 shows that *how* these are combined numerically matters a great deal.

**Worked example: a quarter turn**

Rotate by $\theta = 90°$ about $u = e_z$: $[e_z]_\times = \begin{bmatrix} 0 & -1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}$ and $[e_z]_\times^2 = \operatorname{diag}(-1, -1, 0)$, so (7.5) gives $R = \begin{bmatrix} 0 & -1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix} = R_z(90°)$, which sends $e_x$ to $e_y$, as a counter-clockwise quarter turn about $z$ should. Its trace is $1 = 1 + 2\cos 90°$.

## 7.5 Euler angles

### 7.5.1 Definition and the two readings

*Euler angles* describe a rotation as three successive rotations about coordinate axes. The aerospace yaw-pitch-roll ($ZYX$) convention writes

$$R_{wb} = R_z(\psi)\, R_y(\vartheta)\, R_x(\varphi), \tag{7.7}$$

with yaw $\psi$, pitch $\vartheta$ and roll $\varphi$. The same product can be read in two ways, which are a constant source of confusion:

- *Intrinsic* (rotating axes): start aligned with the world, yaw by $\psi$ about $z$, then pitch by $\vartheta$ about the *new* $y$-axis, then roll by $\varphi$ about the *newest* $x$-axis. This is how a pilot thinks.
- *Extrinsic* (fixed axes): roll by $\varphi$ about the world $x$-axis, then pitch by $\vartheta$ about the world $y$-axis, then yaw by $\psi$ about the world $z$-axis.

Both readings produce the same matrix (7.7); the intrinsic sequence $z, y', x''$ equals the extrinsic sequence $x, y, z$ in reverse order. Twelve different axis sequences are in use, and each library documents its own. Always check the convention against a known example before trusting a conversion.

### 7.5.2 Conversions

Multiplying out (7.7) gives the third row of $R$ as $(-\sin\vartheta,\ \cos\vartheta\sin\varphi,\ \cos\vartheta\cos\varphi)$ and the first column as $\cos\vartheta(\cos\psi, \sin\psi, \cdot)$. Hence

$$\vartheta = \operatorname{atan2}\big(-R_{31},\ \sqrt{R_{11}^2 + R_{21}^2}\big), \qquad \varphi = \operatorname{atan2}(R_{32},\ R_{33}), \qquad \psi = \operatorname{atan2}(R_{21},\ R_{11}). \tag{7.8}$$

When $\cos\vartheta = 0$ ($\vartheta = \pm 90°$), the formulas for $\varphi$ and $\psi$ become $\operatorname{atan2}(0, 0)$: only their sum or difference is determined.

### 7.5.3 Gimbal lock

The relation between the body angular velocity measured by a gyroscope and the rates of the Euler angles is

$$\begin{bmatrix} \dot\varphi \\ \dot\vartheta \\ \dot\psi \end{bmatrix} = \begin{bmatrix} 1 & \sin\varphi\tan\vartheta & \cos\varphi\tan\vartheta \\ 0 & \cos\varphi & -\sin\varphi \\ 0 & \sin\varphi/\cos\vartheta & \cos\varphi/\cos\vartheta \end{bmatrix} \omega_b, \tag{7.9}$$

obtained by differentiating (7.7) and comparing with $[\omega_b]_\times = R^\mathsf{T}\dot R$ (Section 7.8). At $\vartheta = \pm 90°$ the matrix blows up. Geometrically, when the nose points straight up, yaw and roll rotate about the same physical axis, so the three angles no longer describe three independent motions. This is *gimbal lock*, named after mechanical gimbal platforms that physically jam in this configuration. Near the singularity, small angular velocities produce enormous Euler-angle rates, and a filter that linearizes in Euler angles becomes numerically meaningless.

**Frozen convention: AGENTS.md C2**

Euler angles never appear in the estimator. They may appear only in telemetry and plots.

No three-parameter representation of SO(3) is free of singularities everywhere: a topological fact (the space SO(3) cannot be covered by a single chart). The solution adopted by modern estimators is to store attitude in a singularity-free *redundant* representation (a unit quaternion or a rotation matrix) and to use three parameters only for *small* deviations around the current estimate, where no singularity is near. That is the content of Chapter 8.

## 7.6 Quaternions

### 7.6.1 Quaternion algebra

A *quaternion* is a four-component number $q = w + x\,i + y\,j + z\,k$, written as a scalar part and a vector part, $q = [w,\ v]$ with $v = (x, y, z)^\mathsf{T}$. Hamilton's multiplication rules for the three

imaginary units are

$$i^2 = j^2 = k^2 = ijk = -1, \tag{7.10}$$

from which $ij = k = -ji$, $jk = i = -kj$ and $ki = j = -ik$. (For example, multiplying $ijk = -1$ on the right by $k$ gives $ij(-1) = -k$.) Expanding the product of two quaternions term by term with these rules and collecting the scalar and vector parts gives

$$p \otimes q = \begin{bmatrix} p_w q_w - p_v^\mathsf{T} q_v \\ p_w q_v + q_w p_v + p_v \times q_v \end{bmatrix}. \tag{7.11}$$

The products of imaginary units produce exactly the components of the cross product, which makes the product non-commutative: $p \otimes q - q \otimes p = [0,\ 2p_v \times q_v]$. It is associative. Because it is linear in each factor, it can be written with matrices,

$$p \otimes q = [p]_L\, q = [q]_R\, p, \qquad [p]_L = \begin{bmatrix} p_w & -p_v^\mathsf{T} \\ p_v & p_w I + [p_v]_\times \end{bmatrix}, \quad [q]_R = \begin{bmatrix} q_w & -q_v^\mathsf{T} \\ q_v & q_w I - [q_v]_\times \end{bmatrix}, \tag{7.12}$$

where quaternions are treated as 4-vectors $[q_w;\ q_v]$.

The *conjugate* is $q^* = [w,\ -v]$ and the *norm* is $\|q\| = \sqrt{w^2 + \|v\|^2}$. By (7.11), $q \otimes q^* = [\|q\|^2,\ 0]$, so the inverse is $q^{-1} = q^*/\|q\|^2$. Conjugation reverses products, $(p \otimes q)^* = q^* \otimes p^*$, and norms multiply, $\|p \otimes q\| = \|p\|\|q\|$ (because $\|p \otimes q\|^2 = p \otimes q \otimes q^* \otimes p^* = \|q\|^2\, p \otimes p^* = \|p\|^2\|q\|^2$). Consequently the product of two *unit* quaternions is a unit quaternion: unit quaternions form a group, the three-dimensional sphere $S^3 \subset \mathbb{R}^4$.

### 7.6.2 Unit quaternions represent rotations

Identify a vector $a \in \mathbb{R}^3$ with the *pure* quaternion $[0, a]$.

**Theorem 7.3** (Rotation by a unit quaternion). *For a unit quaternion $q = [w, v]$, the map $a \mapsto q \otimes [0, a] \otimes q^*$ sends pure quaternions to pure quaternions and acts on $a$ as the rotation matrix*

$$R(q) = (w^2 - v^\mathsf{T} v)\, I + 2\, v v^\mathsf{T} + 2w\, [v]_\times = \begin{bmatrix} 1 - 2(y^2 + z^2) & 2(xy - wz) & 2(xz + wy) \\ 2(xy + wz) & 1 - 2(x^2 + z^2) & 2(yz - wx) \\ 2(xz - wy) & 2(yz + wx) & 1 - 2(x^2 + y^2) \end{bmatrix}. \tag{7.13}$$

*The unit quaternion of a rotation by $\theta$ about the unit axis $u$ is*

$$q = \big[\cos(\theta/2),\ \sin(\theta/2)\, u\big]. \tag{7.14}$$

*Proof.* By (7.11), $[0, a] \otimes q^* = [a^\mathsf{T} v,\ wa - a \times v]$. Multiplying on the left by $q = [w, v]$: the scalar part is $w\, a^\mathsf{T} v - v^\mathsf{T}(wa - a \times v) = 0$ (since $v^\mathsf{T}(a \times v) = 0$), and the vector part is $w(wa - a \times v) + (a^\mathsf{T} v)v + v \times (wa - a \times v) = w^2 a + 2w\, v \times a + (v^\mathsf{T} a)v - v \times (a \times v)$. With the BAC–CAB rule, $v \times (a \times v) = a\,(v^\mathsf{T} v) - v\,(v^\mathsf{T} a)$, so the vector part is $(w^2 - v^\mathsf{T} v)a + 2(v^\mathsf{T} a)v + 2w\, v \times a$, which is (7.13). This matrix is orthogonal with determinant one (it preserves norms, because quaternion norms multiply, and depends continuously on $q$, equal to $I$ at $q = [1, 0]$). For (7.14), substitute $w = \cos\frac{\theta}{2}$, $v = \sin\frac{\theta}{2} u$ and use the double-angle identities $w^2 - v^\mathsf{T} v = \cos\theta$, $2\sin^2\frac{\theta}{2} = 1 - \cos\theta$ and $2\sin\frac{\theta}{2}\cos\frac{\theta}{2} = \sin\theta$; the result is the second form of Rodrigues' formula (7.5). ∎

The *half* angle in (7.14) is the most common source of factor-of-two bugs. It arises because $q$ appears twice in the sandwich product $q \otimes [0, a] \otimes q^*$, each occurrence contributing half of the rotation.

**Key idea: double cover**

$q$ and $-q$ give the same $R(q)$, since (7.13) is quadratic in $q$. Every rotation has exactly two unit quaternions, at opposite points of the sphere $S^3$. They correspond to rotating by $\theta$ about $u$, or by $2\pi - \theta$ about $-u$. Code that compares, averages, interpolates or takes logarithms of quaternions must account for this. The project canonicalizes to $w \geq 0$ before taking $\mathrm{Log}_q$ (AGENTS.md C2).

### 7.6.3 Composition

Because $(p \otimes q) \otimes [0, a] \otimes (p \otimes q)^* = p \otimes \big(q \otimes [0, a] \otimes q^*\big) \otimes p^*$, the Hamilton product composes rotations in the same order as matrix multiplication:

$$R(p \otimes q) = R(p)\, R(q), \qquad q_{wc} = q_{wb} \otimes q_{bc} \;\leftrightarrow\; R_{wc} = R_{wb} R_{bc}. \tag{7.15}$$

The adjacency rule therefore applies to quaternions unchanged. Composing quaternions costs 16 multiplications and 12 additions, against 27 and 18 for matrices, and renormalizing a quaternion is trivial compared with re-orthogonalizing a matrix. These are the practical reasons to store attitude as a quaternion.

**Worked example: composing two quarter turns**

The quarter turn about $z$ is $q_z = [\cos 45°,\ \sin 45° e_z] = \frac{1}{\sqrt{2}}[1, (0, 0, 1)]$, and about $x$ it is $q_x = \frac{1}{\sqrt{2}}[1, (1, 0, 0)]$. By (7.11), $q_z \otimes q_x = \frac{1}{2}\big[1,\ (1, 0, 1) + e_z \times e_x\big] = \frac{1}{2}[1, (1, 1, 1)]$: a rotation by $2 \arccos \frac{1}{2} = 120°$ about $(1, 1, 1)/\sqrt{3}$. (Check: it cycles the axes, $x \to y \to z \to x$.) In the other order, $q_x \otimes q_z = \frac{1}{2}[1, (1, -1, 1)]$, a different rotation.

### 7.6.4 Converting a rotation matrix to a quaternion

Inverting (7.13) naively via $w = \frac{1}{2}\sqrt{1 + \operatorname{tr} R}$ and $v = (R - R^{\mathsf{T}})^{\vee}/(4w)$ divides by a number that vanishes for 180° rotations. *Shepperd's method* avoids this. From (7.13), the four quantities $4w^2 = 1 + \operatorname{tr} R$, $4x^2 = 1 + R_{11} - R_{22} - R_{33}$, $4y^2 = 1 - R_{11} + R_{22} - R_{33}$ and $4z^2 = 1 - R_{11} - R_{22} + R_{33}$ can all be computed from the diagonal. Choose the largest (at least $1/4$, since $w^2 + x^2 + y^2 + z^2 = 1$), take its square root, and compute the other three components from the off-diagonal sums and differences, for example $4wx = R_{32} - R_{23}$, $4xy = R_{21} + R_{12}$, $4xz = R_{13} + R_{31}$, dividing only by the large component. Eigen implements this method.

### 7.6.5 The Hamilton and JPL conventions

Unfortunately, two incompatible quaternion conventions are in wide use. Much of the classic VIO literature, including the original MSCKF paper [40] and the indirect Kalman filter report of Trawny and Roumeliotis [52], uses the *JPL* convention. Formulas cannot be copied between the two without translation [49].

| | **Hamilton (this project)** | **JPL** |
|---|---|---|
| Multiplication rule | $ij = k$ ($ijk = -1$) | $ij = -k$ ($ijk = +1$) |
| Component order | usually $[w, x, y, z]$ | usually $[x, y, z, w]$ |
| Typical meaning | body-to-world (active), $q_{wb}$ | world-to-body (passive), ${}^{B}_{W}\bar{q}$ |
| Composition | $q_{wc} = q_{wb} \otimes q_{bc}$ | ${}^{C}_{W}\bar{q} = {}^{C}_{B}\bar{q} \otimes {}^{B}_{W}\bar{q}$ |
| Rotation matrix | $R(q) = (w^2 - v^\mathsf{T}v)I + 2vv^\mathsf{T} + 2w[v]_\times$ | $C(\bar{q}) = (2q_4^2 - 1)I - 2q_4[q]_\times + 2qq^\mathsf{T}$ |
| Used by | Eigen, ROS, Solà [47], Ceres, Sophus | MSCKF papers, Trawny [52], NASA |

**Table 7.1:** Hamilton versus JPL quaternions. The JPL product of two quaternions equals the Hamilton product of the same numbers in reverse order.

A useful fact for reading the JPL literature: the JPL quaternion ${}^{B}_{W}\bar{q}$ of the world-to-body rotation has *the same four numbers* as the Hamilton quaternion $q_{wb}$ of the body-to-world rotation, merely stored in the order $[x, y, z, w]$. (Substitute into the two rotation formulas of Table 7.1: $C(\bar{q}) = R(q)^\mathsf{T}$.) What changes is the meaning of products and of perturbations: a JPL error quaternion $\delta\bar{q}$ in ${}^{B}_{W}\bar{q} = \delta\bar{q} \otimes {}^{B}_{W}\hat{\bar{q}}$ is a perturbation in the body frame, but written on the left, and its Jacobians differ in sign and order from ours. Translate a JPL derivation by re-deriving it, not by pattern-matching symbols.

**Frozen convention: quaternions, AGENTS.md C2**

Hamilton quaternions, `Eigen::Quaterniond`, always of unit norm, normalized after every multiplicative update. Never substitute JPL formulas, even when a paper you are reading uses them. Translate them first.

### 7.6.6 Quaternions in code and data

**Pitfall: coefficient order**

Three orderings meet at the project's input boundary:

- `Eigen::Quaterniond(w, x, y, z)`: the constructor takes $w$ *first*;
- `q.coeffs()`: Eigen's storage is $[x, y, z, w]$, with $w$ *last*;
- EuRoC CSV files store `qw, qx, qy, qz`, with $w$ first.

Mapping a raw EuRoC row with `Eigen::Map<Quaterniond>` interprets it as $[x, y, z, w]$ and silently produces a different, valid-looking rotation. Always construct explicitly, `Eigen::Quaterniond(row[0], row[1], row[2], row[3])`, and cover the parser with a fixture test.

Other Eigen facts worth knowing: `q * v` for a `Vector3d` applies $R(q)$ to $v$; `q1 * q2` is the Hamilton product; `q.conjugate()` is the inverse of a unit quaternion; `q.normalize()` works in place while `q.normalized()` returns a copy; and `q.toRotationMatrix()` evaluates (7.13).

**Normalization.** Each multiplicative update of a quaternion rounds its four components, so $\|q\|$ performs a slow random walk away from 1. A non-unit quaternion inserted into (7.13) produces a matrix that scales vectors by $\|q\|^2$ as well as rotating them. Dividing by the

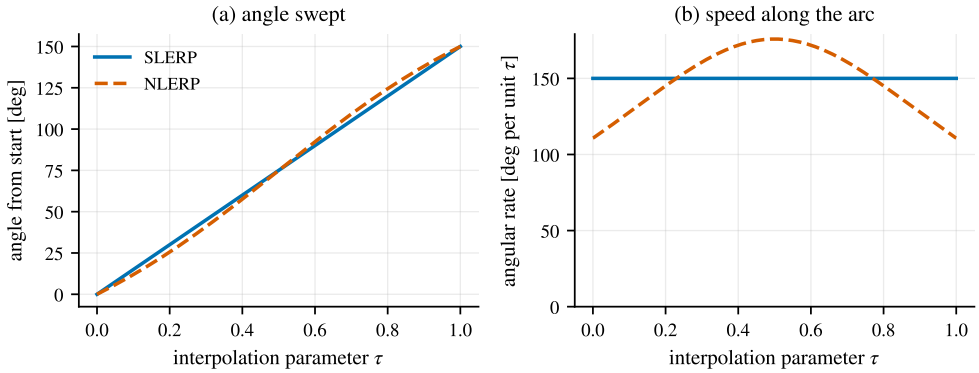



**Figure 7.2:** Interpolating between two attitudes 150° apart. SLERP sweeps the angle uniformly in the interpolation parameter; normalized linear interpolation (NLERP) follows the same path but at a non-uniform speed, fastest in the middle.

norm after every update costs a few flops and removes the problem. Milestone 4 checks that $|\|q\| - 1| < 10^{-12}$ after $10^6$ updates.

### 7.6.7 Distance and interpolation

The angle of the relative rotation between two attitudes $q_1$ and $q_2$ is

$$\theta_{12} = 2 \arccos \left| q_1^{\mathsf{T}} q_2 \right| = \left\| \operatorname{Log}_q (q_1^{-1} \otimes q_2) \right\|, \tag{7.16}$$

where $q_1^{\mathsf{T}} q_2$ is the four-dimensional dot product (the scalar part of $q_1^* \otimes q_2$) and the absolute value accounts for the double cover. (For small angles prefer the $\operatorname{Log}_q$ form, which avoids arccos near 1; Chapter 8.)

Ground truth and IMU data rarely share timestamps with images, so attitudes must be interpolated. The correct interpolation follows the shortest great arc at constant angular velocity: *spherical linear interpolation* (SLERP),

$$q(\tau) = q_0 \otimes \operatorname{Exp}_q\big(\tau \, \operatorname{Log}_q(q_0^{-1} \otimes q_1)\big) = \frac{\sin((1-\tau)\Omega)}{\sin \Omega} \, q_0 + \frac{\sin(\tau\Omega)}{\sin \Omega} \, q_1, \qquad \tau \in [0,1], \tag{7.17}$$

with $\cos \Omega = q_0^{\mathsf{T}} q_1$ after flipping the sign of $q_1$ if needed so that $q_0^{\mathsf{T}} q_1 \geq 0$. The first form (using the exponential and logarithm of Chapter 8) shows that the relative rotation is applied with a uniformly growing angle; the second is the formula for interpolating along a great circle of the sphere. Component-wise linear interpolation followed by normalization (NLERP) follows the same path at a non-uniform speed (Figure 7.2); it is acceptable only for small angles.

## 7.7 Rigid-body transformations

A rigid transformation combines a rotation and a translation. Point coordinates transform as

$$p_w = R_{wb}\, p_b + p_{wb} \quad \Longleftrightarrow \quad \begin{bmatrix} p_w \\ 1 \end{bmatrix} = \underbrace{\begin{bmatrix} R_{wb} & p_{wb} \\ 0 & 1 \end{bmatrix}}_{T_{wb}} \begin{bmatrix} p_b \\ 1 \end{bmatrix}. \tag{7.18}$$

Appending a 1 to the point (*homogeneous coordinates*, developed in Chapter 20) turns the affine map into a single matrix product. The $4 \times 4$ matrices of this form make up the group SE(3) of rigid motions. Composition and inversion follow from block multiplication:

$$T_{wc} = T_{wb} T_{bc} = \begin{bmatrix} R_{wb} R_{bc} & R_{wb} p_{bc} + p_{wb} \\ 0 & 1 \end{bmatrix}, \qquad T_{wb}^{-1} = T_{bw} = \begin{bmatrix} R_{wb}^{\mathsf{T}} & -R_{wb}^{\mathsf{T}} p_{wb} \\ 0 & 1 \end{bmatrix}. \tag{7.19}$$

The camera pose in the world therefore is $R_{wc} = R_{wb} R_{bc}$ and $p_{wc} = p_{wb} + R_{wb} p_{bc}$, and a world point $p_f$ has camera coordinates

$$p_c = R_{bc}^{\mathsf{T}} \big( R_{wb}^{\mathsf{T}} (p_f - p_{wb}) - p_{bc} \big), \tag{7.20}$$

which is the first half of the camera measurement model (AGENTS.md C6).

**Pitfall: points versus directions**

Translations apply to points, not to free vectors. A velocity, a gravity vector or a bearing direction transforms with the rotation only, $v_w = R_{wb} v_b$. In homogeneous coordinates directions carry a 0 in the fourth component, which drops the translation automatically.

## 7.8 Rotational kinematics

### 7.8.1 Angular velocity

Let $R(t) = R_{wb}(t)$ describe a rotating body. Differentiating $R^{\mathsf{T}} R = I$ gives $\dot{R}^{\mathsf{T}} R + R^{\mathsf{T}} \dot{R} = 0$, so $R^{\mathsf{T}} \dot{R}$ is skew-symmetric and equals $[\omega_b]_\times$ for a unique vector $\omega_b$:

$$\dot{R}_{wb} = R_{wb}\, [\omega_b]_\times = [\omega_w]_\times\, R_{wb}, \qquad \omega_w = R_{wb}\, \omega_b, \tag{7.21}$$

where the second form uses (2.14). Why is $\omega$ an angular velocity? A point fixed in the body, with constant body coordinates $r_b$, has world coordinates $r_w = R_{wb} r_b$ and velocity $\dot{r}_w = \dot{R}_{wb} r_b = [\omega_w]_\times R_{wb} r_b = \omega_w \times r_w$: every point moves as if the body were spinning about the axis $\omega_w$ through the origin with angular speed $\|\omega\|$. $\omega_b$ is this angular velocity of $B$ relative to $W$, expressed in $B$, and it is exactly what a strapdown gyroscope measures (up to bias and noise). The two forms of (7.21) are the kinematic origin of the two perturbation conventions of Chapter 8: a body-frame quantity multiplies on the right, a world-frame quantity on the left.

**Proposition 7.4** (Constant body rate). *If $\omega_b$ is constant on $[t_0, t_0 + \Delta t]$, then $R(t_0 + \Delta t) = R(t_0) \exp(\Delta t\, [\omega_b]_\times)$.*

*Proof.* $R(t) = R(t_0)\exp((t-t_0)[\omega_b]_\times)$ satisfies (7.21) by Proposition 3.14, and the solution is unique (Theorem 4.5). ∎

This exact solution is the basis of the multiplicative attitude update used in every integration scheme of Chapter 16. When the rate varies, the update is still applied step by step with the rate held constant over each short step (Section 4.3.3). Note that the solution is *not* $R(t_0) + \Delta t\, R(t_0)[\omega_b]_\times$, which would leave SO(3).

### 7.8.2 Quaternion kinematics

The quaternion counterpart of (7.21) is

$$\dot{q}_{wb} = \tfrac{1}{2}\, q_{wb} \otimes [0,\ \omega_b] = \tfrac{1}{2}\, \Omega(\omega_b)\, q_{wb}, \qquad \Omega(\omega) = [\,[0,\omega]\,]_R = \begin{bmatrix} 0 & -\omega^\mathsf{T} \\ \omega & -[\omega]_\times \end{bmatrix}, \tag{7.22}$$

with constant-rate solution $q(t_0+\Delta t) = q(t_0) \otimes \left[\cos\frac{\|\omega\|\Delta t}{2},\ \sin\frac{\|\omega\|\Delta t}{2}\,\frac{\omega}{\|\omega\|}\right]$. To derive (7.22), compose $q(t+\mathrm{d}t) = q(t) \otimes \mathrm{d}q$, where $\mathrm{d}q$ is the small body-frame rotation by $\omega_b\,\mathrm{d}t$. By (7.14), $\mathrm{d}q = [1,\ \frac{1}{2}\omega_b\,\mathrm{d}t] + O(\mathrm{d}t^2)$, so $q(t+\mathrm{d}t) - q(t) = q \otimes [0, \frac{1}{2}\omega_b]\,\mathrm{d}t$. The factor $\frac{1}{2}$ is the half angle again.

### 7.8.3 Derivatives in a rotating frame

Differentiating $v_w = R_{wb}v_b$ with (7.21) gives the *transport theorem*

$$\dot{v}_w = R_{wb}\left(\dot{v}_b + \omega_b \times v_b\right): \tag{7.23}$$

the rate of change seen from the fixed frame equals the rate seen in the rotating frame plus the change due to the rotation of the frame itself. Applying it twice to the position $r$ of a particle relative to a frame rotating with angular velocity $\Omega$ (constant) gives the acceleration in the fixed (inertial) frame, expressed in rotating coordinates:

$$a_{\text{inertial}} = \ddot{r} + 2\,\Omega \times \dot{r} + \Omega \times (\Omega \times r), \tag{7.24}$$

where $\ddot{r}$ and $\dot{r}$ are the acceleration and velocity seen in the rotating frame. The extra terms are the *Coriolis acceleration* $2\Omega \times \dot{r}$ and the *centripetal acceleration* $\Omega \times (\Omega \times r)$. This formula is the working principle of the vibratory MEMS gyroscope (Chapter 15), and it tells us what we neglect by treating the world frame as inertial.

### 7.8.4 The Earth is not an inertial frame

The world frame $W$ is fixed to the Earth, which rotates at $\Omega_e = 7.292 \times 10^{-5}$ rad/s. Three effects follow; their sizes justify the project's simplifications.

- *Gyroscopes sense the Earth rate.* $7.3 \times 10^{-5}$ rad/s is comparable to the bias instability of the EuRoC ADIS16448 and far below its noise over short horizons. The project neglects it; its constant body-frame component (while the attitude changes little) is absorbed by the gyro bias estimate. High-grade systems model it explicitly and can even find north from it (gyrocompassing).

- *Centripetal acceleration.* The term $\Omega_e \times (\Omega_e \times r)$ reaches 0.034 m/s$^2$ at the equator. It is absorbed into the local gravity vector: *gravity*, as measured by a plumb line, is gravitation plus this centrifugal term. Its magnitude varies from 9.780 m/s$^2$ at the equator to 9.832 m/s$^2$ at the poles; the project uses a constant 9.81 (AGENTS.md C5), accurate to about $10^{-3}$ relative in Zurich, where EuRoC was recorded.
- *Coriolis acceleration.* $2\Omega_e \times v$ is about $1.5 \times 10^{-4}$ m/s$^2$ at 1 m/s: below accelerometer noise and bias for a small drone, and neglected.

Over the minutes and hundreds of meters of a EuRoC sequence, the world frame may therefore be treated as inertial and flat, with constant gravity.

**Key takeaways**

- $R_{wb}$ maps body coordinates to world coordinates; its columns are the body axes in the world. Adjacent subscripts must match.
- Every rotation is an axis-angle rotation, $R = I + \sin\theta[u]_\times + (1 - \cos\theta)[u]_\times^2$; $\operatorname{tr} R = 1 + 2\cos\theta$.
- Euler angles have intrinsic and extrinsic readings and a singularity at ±90° pitch; they stay out of the estimator.
- Hamilton unit quaternions compose like matrices; $q$ and $-q$ are the same rotation; the quaternion of a rotation by $\theta$ uses $\theta/2$.
- Eigen's constructor is $w$-first, its storage $w$-last, EuRoC is $w$-first. JPL formulas must be re-derived, not copied.
- $\dot{R}_{wb} = R_{wb}[\omega_b]_\times$; with constant $\omega_b$ the update $R \leftarrow R\exp(\Delta t[\omega_b]_\times)$ is exact.
- Derivatives in rotating frames pick up $\omega\times$ terms; for a small drone over minutes, the Earth's rotation is negligible.

## Exercises

**7.1** Show that the columns of any $R \in \mathrm{SO}(3)$ are orthonormal and that $\det R = +1$ implies the third column is the cross product of the first two.

**7.2** Verify $R_x(90°)R_y(90°) \neq R_y(90°)R_x(90°)$ by computing both products, and describe each rotation physically.

**7.3** Derive (7.9) from (7.7) and $[\omega_b]_\times = R^\mathsf{T}\dot{R}$.

**7.4** Convert the rotation of the worked example (120° about $(1,1,1)/\sqrt{3}$) to ZYX Euler angles.

**7.5** Prove that $[p]_L[q]_R = [q]_R[p]_L$. What does this say about associativity of the quaternion product?

**7.6** Show that $R(-q) = R(q)$ and compute the quaternion of a 270° rotation about $z$ in its canonical form ($w \geq 0$). What rotation angle and axis does the canonical form describe?

**7.7** Implement Shepperd's method and test it on rotations by 0°, 90°, 179.9999° and 180°.

**7.8** Write a function that converts a EuRoC ground-truth row into $p_{wb}$, $q_{wb}$, $v_{wb}$, $b_g$ and $b_a$. Design a fixture row whose values would expose a swapped $w/z$ and swapped biases.

**7.9** Given $T_{bc}$ from `cam0/sensor.yaml` (Appendix D), compute the camera's optical axis in body coordinates.

**7.10** Show that if $\omega_b$ varies in time, $R(t) = R(0)\exp\left(\int_0^t [\omega_b]_\times \, \mathrm{d}s\right)$ is in general *wrong*. Construct a counterexample with piecewise-constant rates.

**7.11** Derive (7.24) by applying (7.23) twice.

## Solutions to the exercises

**7.1** Write $R = [r_1\ r_2\ r_3]$. The entry $(i, j)$ of $R^\mathsf{T}R = I$ is $r_i^\mathsf{T} r_j = \delta_{ij}$: the columns are orthonormal. The unit vectors orthogonal to both $r_1$ and $r_2$ are exactly $\pm r_1 \times r_2$ (a unit vector, by Lagrange's identity), so $r_3 = \pm r_1 \times r_2$. The determinant is the triple product $\det R = r_3^\mathsf{T}(r_1 \times r_2) = \pm\|r_1 \times r_2\|^2 = \pm 1$, so $\det R = +1$ selects $r_3 = r_1 \times r_2$: the body axes form a right-handed frame.

**7.2** From the elementary matrices,

$$R_x(90^\circ)R_y(90^\circ) = \begin{bmatrix} 0 & 0 & 1 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix}, \qquad R_y(90^\circ)R_x(90^\circ) = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & -1 \\ -1 & 0 & 0 \end{bmatrix}.$$

The first sends $e_x \to e_y, e_y \to e_z, e_z \to e_x$ (its columns): it cycles the axes, a $120^\circ$ rotation about $(1,1,1)/\sqrt{3}$. The second has trace 0 (angle $120^\circ$) and $(R - R^\mathsf{T})^\vee = (1, 1, -1)$, so it is a $120^\circ$ rotation about $(1,1,-1)/\sqrt{3}$. Physically, read as intrinsic sequences: the first turns a book $90^\circ$ about its $x$-axis and then $90^\circ$ about its new $y$-axis; the second does the two quarter turns in the other order and leaves the book in a different orientation.

**7.3** Write $R = R_z R_y R_x$ with $\dot R_z = \dot\psi R_z [e_z]_\times$, $\dot R_y = \dot\vartheta R_y [e_y]_\times$, $\dot R_x = \dot\varphi R_x [e_x]_\times$. Then

$$R^\mathsf{T}\dot R = \dot\psi\, R_x^\mathsf{T} R_y^\mathsf{T} [e_z]_\times R_y R_x + \dot\vartheta\, R_x^\mathsf{T} [e_y]_\times R_x + \dot\varphi\, [e_x]_\times = \left[\dot\psi\, R_x^\mathsf{T} R_y^\mathsf{T} e_z + \dot\vartheta\, R_x^\mathsf{T} e_y + \dot\varphi\, e_x\right]_\times$$

by (2.14). With $R_y^\mathsf{T} e_z = (-s_\vartheta, 0, c_\vartheta)$, $R_x^\mathsf{T}(-s_\vartheta, 0, c_\vartheta) = (-s_\vartheta, s_\varphi c_\vartheta, c_\varphi c_\vartheta)$ and $R_x^\mathsf{T} e_y = (0, c_\varphi, -s_\varphi)$,

$$\omega_b = \begin{bmatrix} 1 & 0 & -s_\vartheta \\ 0 & c_\varphi & s_\varphi c_\vartheta \\ 0 & -s_\varphi & c_\varphi c_\vartheta \end{bmatrix} \begin{bmatrix} \dot\varphi \\ \dot\vartheta \\ \dot\psi \end{bmatrix}.$$

The matrix has determinant $c_\vartheta$. Solving the last two rows gives $\dot\vartheta = c_\varphi \omega_y - s_\varphi \omega_z$ and $\dot\psi = (s_\varphi \omega_y + c_\varphi \omega_z)/c_\vartheta$, and the first row gives $\dot\varphi = \omega_x + s_\vartheta \dot\psi$, which is (7.9). The determinant $c_\vartheta$ vanishes at $\vartheta = \pm 90^\circ$: gimbal lock.

**7.4** The rotation is the axis-cycling matrix of Exercise 7.2, $R = \begin{bmatrix} 0 & 0 & 1 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix}$. With the conversion formulas, $\vartheta = \operatorname{atan2}(-R_{31}, \sqrt{R_{11}^2 + R_{21}^2}) = \operatorname{atan2}(0, 1) = 0$, $\varphi = \operatorname{atan2}(R_{32}, R_{33}) = \operatorname{atan2}(1, 0) = 90^\circ$ and $\psi = \operatorname{atan2}(R_{21}, R_{11}) = \operatorname{atan2}(1, 0) = 90^\circ$: yaw $90^\circ$, pitch 0, roll $90^\circ$. Check: $R_z(90^\circ)R_x(90^\circ)$ reproduces $R$, as the worked example $q_z \otimes q_x$ already showed.

**7.5** Apply both sides to an arbitrary quaternion $r$. By definition $[q]_R r = r \otimes q$ and $[p]_L r = p \otimes r$, so

$$[p]_L [q]_R\, r = p \otimes (r \otimes q), \qquad [q]_R [p]_L\, r = (p \otimes r) \otimes q.$$

The two agree for every $r$ exactly because the Hamilton product is associative, so the matrices are equal. (Multiplying out the blocks and using $[a]_\times [b]_\times = ba^\mathsf{T} - (a^\mathsf{T} b)I$ confirms it directly.) Conversely, the identity $[p]_L [q]_R = [q]_R [p]_L$ for all $p, q$ *is* the

statement of associativity: multiplying on the left and on the right are commuting operations.

**7.6** $R(q)$ in (7.13) is a homogeneous quadratic in the components of $q$, so $R(-q) = (-1)^2 R(q) = R(q)$. A 270° rotation about $z$ has

$$q = \left[\cos 135^\circ,\ \sin 135^\circ e_z\right] = \left[-\tfrac{\sqrt{2}}{2},\ (0, 0, \tfrac{\sqrt{2}}{2})\right].$$

Its scalar part is negative, so the canonical form is $-q = [\frac{\sqrt{2}}{2},\ (0, 0, -\frac{\sqrt{2}}{2})]$. It describes a rotation by $2\arccos(\frac{\sqrt{2}}{2}) = 90^\circ$ about $-e_z$: the same rotation as 270° about $+e_z$, reached the short way round. Canonicalization always yields an angle in $[0, \pi]$.

**7.7** A direct implementation picks the largest of the four squared components, computed from the diagonal:

```
def shepperd(R):
    t = np.trace(R)
    c = [1 + t, 1 + R[0,0] - R[1,1] - R[2,2], 1 - R[0,0] + R[1,1] - R[2,2], 1 - R[0,0] - R[1,1] +
     R[2,2]]
    i = int(np.argmax(c)); s = 2 * np.sqrt(c[i])          # s = 4 * (largest component)
    a, b, d = R[2,1] - R[1,2], R[0,2] - R[2,0], R[1,0] - R[0,1]   # 4wx, 4wy, 4wz
    e, f, g = R[0,1] + R[1,0], R[0,2] + R[2,0], R[1,2] + R[2,1]   # 4xy, 4xz, 4yz
    q = [[s/4, a/s, b/s, d/s], [a/s, s/4, e/s, f/s], [b/s, e/s, s/4, g/s], [d/s, f/s, g/s, s/4]][i
     ]
    return np.array(q) if q[0] >= 0 else -np.array(q)
```

Testing against the quaternion used to build each matrix (axis $(1, -2, 0.5)/\|\cdot\|$) gives errors of 0, $3 \times 10^{-16}$, $2 \times 10^{-18}$ and $10^{-16}$ at 0°, 90°, 179.9999° and 180°. The naive formula $w = \frac{1}{2}\sqrt{1 + \operatorname{tr} R}$, $v = (R - R^\mathsf{T})^\vee / 4w$ is exact at the first two, wrong by $9 \times 10^{-6}$ at 179.9999° (it divides by $w \approx 9 \times 10^{-7}$, computed from the difference $1 + \operatorname{tr} R \approx 3 \times 10^{-12}$), and undefined at 180°.

**7.8** The ground-truth row is `timestamp, p_x, p_y, p_z, q_w, q_x, q_y, q_z, v_x, v_y, v_z, bw_x, bw_y, bw_z, ba_x, ba_y, ba_z` (AGENTS.md C7). In C++ the parser constructs each piece explicitly:

```
p_wb = Eigen::Vector3d(r[1], r[2], r[3]);
q_wb = Eigen::Quaterniond(r[4], r[5], r[6], r[7]).normalized();  // w first
v_wb = Eigen::Vector3d(r[8], r[9], r[10]);
b_g  = Eigen::Vector3d(r[11], r[12], r[13]);   // gyro bias comes first
b_a  = Eigen::Vector3d(r[14], r[15], r[16]);
```

A good fixture row makes every plausible mistake produce a detectably different result: all quaternion components distinct and of different signs, e.g. $q = (w, x, y, z) = (0.8, 0.2, -0.4, 0.4)$ (unit norm), so that reading it as $[x, y, z, w]$ gives a different rotation; biases of different magnitudes and signs, e.g. $b_g = (0.01, 0.02, 0.03)$ and $b_a = (-0.1, -0.2, -0.3)$, so that swapping them is visible; and position and velocity that differ in every component. The test asserts each field and also checks that $R(q)\, e_x$ equals the column computed by hand, which catches a wrong constructor order even when the norm is unchanged. A row with the identity quaternion, or with equal biases, would let all these bugs pass.

**7.9** The optical axis is the camera's $z$-axis; in body coordinates it is $R_{bc}e_z$, the third column of the rotation block of $T_{bc}$. With the values of Appendix D it is $(0.0041, 0.0257, 0.9997)$: the camera looks along the body $+z$-axis, tilted by $\arccos(0.9997) = 1.5°$. The other columns show the camera $x$-axis along body $+y$ and the camera $y$-axis along body $-x$; since the EuRoC IMU's $x$-axis points up at rest, the image $y$-axis (rows, increasing downwards) indeed points down.

**7.10** By Proposition 4.7 the formula holds only if the matrices $[\omega_b(t)]_\times$ commute for all $t$, i.e. if $\omega_b(t)$ keeps a fixed direction. Counterexample: $\omega_b = (\pi/2, 0, 0)$ on $[0, 1)$ and $(0, \pi/2, 0)$ on $[1, 2)$. By Proposition 7.4 applied to each segment the true attitude is $R(2) = R(0)R_x(90°)R_y(90°)$, a 120° rotation relative to $R(0)$ (Exercise 7.2). The formula gives $R(0)\exp([(\pi/2, \pi/2, 0)]_\times)$, a 127° rotation about $(1, 1, 0)/\sqrt{2}$, which is wrong by 1.1 rad. This is the coning error in its crudest form (Section 16.4).

**7.11** Let $r_I = Rr$ be the particle's position in inertial coordinates, with $\dot{R} = R[\Omega]_\times$ and $\Omega$ constant. The transport theorem gives $\dot{r}_I = R(\dot{r} + \Omega \times r) = Ru$ with $u = \dot{r} + \Omega \times r$. Applying it again to $u$,

$$\ddot{r}_I = R(\dot{u} + \Omega \times u) = R\big(\ddot{r} + \Omega \times \dot{r} + \Omega \times \dot{r} + \Omega \times (\Omega \times r)\big),$$

using $\dot{\Omega} = 0$. Expressed in rotating coordinates ($R^\mathsf{T}\ddot{r}_I$), the inertial acceleration is $\ddot{r} + 2\,\Omega \times \dot{r} + \Omega \times (\Omega \times r)$, which is (7.24). The factor 2 comes from the two applications, each contributing one $\Omega \times \dot{r}$.

Chapter 8

# Lie Theory for Rotations

**In this chapter**

- Understand SO(3) as a curved manifold with a flat tangent space, and why an estimator needs both.
- Use the exponential and logarithm maps, in matrix and quaternion form, and implement them robustly.
- Distinguish local (right) and global (left) perturbations, and move perturbations across a rotation with the adjoint.
- Define Jacobians of functions of rotations, derive the right Jacobian $J_r$, and build a table of elementary Jacobians from which every Jacobian in the project can be assembled.
- Represent and propagate uncertainty on SO(3), and test manifold Jacobians numerically.

This chapter is the mathematical core of the notes. Its conclusions fit in a few lines (the $\boxplus/\boxminus$ operators of Section 8.9 and the Jacobian table of Table 8.1), but the reasoning behind them is what lets you derive any new Jacobian correctly. The treatment follows the "micro Lie theory" of Solà et al. [48], specialized to SO(3) with the conventions of this project. Barfoot [4] covers the same material in greater depth.

## 8.1 Why estimation needs Lie theory

A Kalman filter represents uncertainty as a mean and a covariance and corrects the mean by adding a vector. Both operations assume the state lives in a vector space. Attitude does not.

- **Addition leaves the space.** If $\hat{q}$ is a unit quaternion and $\delta q$ a small 4-vector, $\hat{q} + \delta q$ is generally not unit length. The same holds for rotation matrices.
- **Redundant parameters give singular covariances.** A unit quaternion has four components but three degrees of freedom. A $4 \times 4$ covariance of a unit quaternion must be singular along the radial direction, and keeping it exactly singular under rounding is hopeless.
- **Minimal parameters have singularities.** Euler angles (Chapter 7) are minimal but singular at gimbal lock.

**Key idea: the Earth and its tangent planes**

The surface of the Earth is curved, yet a town map drawn on flat paper is perfectly accurate for a walk across town. The map is the *tangent plane* at your location. It works

as long as you do not walk too far, and when you move to a new town you draw a new map. An estimator does the same: it stores the attitude on the curved space SO(3) (the globe), and expresses small uncertainties and corrections in the flat 3D tangent space at the current estimate (the town map). The exponential map turns a step on the map into a point on the globe, and the logarithm map does the reverse.

## 8.2 Warm-up: rotations of the plane

Every idea of this chapter appears, in its simplest form, for planar rotations $R(\theta)$. Work through them here; the rest of the chapter asks only what changes in three dimensions.

- *The set.* Planar rotations form a circle: $R(\theta)$ and $R(\theta + 2\pi)$ are the same. The set is one-dimensional but curved, and it is not a vector space ($R(\alpha) + R(\beta)$ is not a rotation).
- *The tangent space.* Differentiating $R(\theta)$ at $\theta = 0$ gives $\frac{\mathrm{d}R}{\mathrm{d}\theta}(0) = \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}$; every velocity at the identity is a multiple of this skew-symmetric matrix. The tangent space is a line, coordinatized by a single number.
- *Exponential and logarithm.* $\exp\left(\theta \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}\right) = R(\theta)$ (sum the series, or solve $\dot{R} = R \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}$), so "Exp" maps an angle to a rotation. Its inverse "Log" recovers the angle, $\theta = \operatorname{atan2}(R_{21}, R_{11}) \in (-\pi, \pi]$, unique only up to the choice of branch.
- *Perturbations.* An estimate $R(\hat{\theta})$ with a small error is $R(\hat{\theta})R(\delta\theta) = R(\hat{\theta} + \delta\theta)$. Because planar rotations commute, perturbing on the left or on the right is the same, and the error of the composition is just the sum of the angles.
- *Jacobians.* The derivative of Exp is the identity (1), and nothing like the right Jacobian appears.

In the plane, therefore, one can simply estimate the angle as a scalar, as long as differences are wrapped to $(-\pi, \pi]$. In three dimensions rotations do not commute, the identity $R(\alpha)R(\beta) = R(\alpha + \beta)$ fails for rotation vectors with different axes, and left and right perturbations differ. Each of these failures produces a new object in this chapter: the adjoint, the Baker–Campbell–Hausdorff formula, and the right and left Jacobians.

## 8.3 Manifolds, groups and Lie groups

### 8.3.1 Manifolds and tangent spaces

A smooth $n$-dimensional *manifold* is a space that looks like $\mathbb{R}^n$ near every point. Precisely, each point has a neighborhood that can be mapped smoothly and invertibly onto an open set of $\mathbb{R}^n$ (a *chart*), and where two charts overlap, the change of coordinates between them is smooth. The surface of a sphere is a 2D manifold: latitude and longitude form a chart away from the poles, and a second chart covers the poles. A manifold usually needs several charts;

a single chart for the whole sphere does not exist, and neither does one for SO(3), which is why every three-number parameterization of attitude has singularities.

A *tangent vector* at a point $x$ of a manifold is the velocity $\dot{\gamma}(0)$ of a smooth curve $\gamma(t)$ through $\gamma(0) = x$. The tangent vectors at $x$ form a vector space, the *tangent space* $T_x\mathcal{M}$, of the same dimension as the manifold. For a manifold that sits inside a larger vector space (as SO(3) sits inside $\mathbb{R}^{3\times3}$), tangent vectors are ordinary vectors tangent to the surface: the tangent plane of a sphere in the Earth analogy.

### 8.3.2 Groups

**Definition 8.1** (Group). A *group* $(\mathcal{G}, \circ)$ is a set with an operation $\circ$ that is associative, has an identity element $\mathcal{E}$ ($\mathcal{E} \circ \mathcal{X} = \mathcal{X} \circ \mathcal{E} = \mathcal{X}$), and an inverse $\mathcal{X}^{-1}$ for every element ($\mathcal{X} \circ \mathcal{X}^{-1} = \mathcal{E}$).

Commutativity is *not* required. Examples: $(\mathbb{R}^n, +)$ (identity 0, inverse $-x$); the invertible $n \times n$ matrices under multiplication; SO(3); the unit quaternions under the Hamilton product; the rigid motions SE(3). A group can also *act* on another set: a rotation acts on vectors by $v \mapsto Rv$, and a rigid motion acts on points by $p \mapsto Rp + t$. These actions are how groups enter measurement models.

**Definition 8.2** (Lie group). A *Lie group* is a group that is also a smooth manifold, such that composition and inversion are smooth maps. A *matrix Lie group* is a Lie group whose elements are invertible matrices and whose operation is matrix multiplication.

Being a group as well gives a Lie group a remarkable property. Multiplication by a fixed element maps a neighborhood of the identity smoothly onto a neighborhood of that element: the space looks the same everywhere. All local calculus can therefore be done once, at the identity, and carried to any other element by composition. This is what makes estimation on SO(3) tractable: one tangent space (at the identity), one exponential map, and one set of Jacobian formulas serve every attitude.

| Group | Elements | Dimension | Role in VIO |
|---|---|---|---|
| $(\mathbb{R}^n, +)$ | vectors | $n$ | position, velocity, biases |
| SO(2) | planar rotations | 1 | toy examples |
| SO(3) | $3 \times 3$ rotation matrices | 3 | attitude |
| $S^3$ | unit quaternions | 3 | attitude (double cover of SO(3)) |
| SE(3) | rigid transformations | 6 | poses, extrinsics |

## 8.4 The Lie algebra and tangent spaces

Consider a smooth curve $R(t) \in \mathrm{SO}(3)$ with $R(0) = I$. Differentiating $R^\mathsf{T}R = I$ at $t = 0$ gives $\dot{R}(0)^\mathsf{T} + \dot{R}(0) = 0$: the velocity at the identity is skew-symmetric. The set of all such velocities is the *Lie algebra*

$$\mathfrak{so}(3) = \{\, \Omega \in \mathbb{R}^{3\times3} : \Omega^\mathsf{T} = -\Omega \,\} = \{\, [\phi]_\times : \phi \in \mathbb{R}^3 \,\}, \tag{8.1}$$

a three-dimensional vector space identified with $\mathbb{R}^3$ by the hat and vee maps, $\phi^\wedge = [\phi]_\times$ and $[\phi]_\times^\vee = \phi$. Unlike SO(3) itself, the Lie algebra is flat: we can add its elements, scale them, and

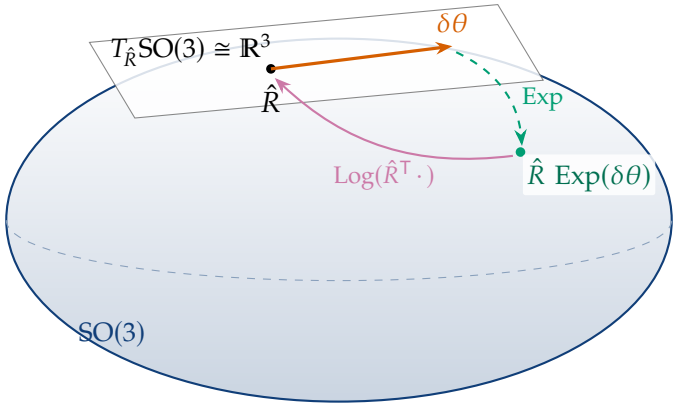



**Figure 8.1:** The manifold SO(3) and its tangent space at the estimate $\hat{R}$. A small error or correction $\delta\theta \in \mathbb{R}^3$ lives in the flat tangent space. The exponential map wraps it onto the manifold as $\hat{R}\,\mathrm{Exp}(\delta\theta)$, and the logarithm recovers it.

put Gaussian distributions on them.

The Lie algebra carries one more operation, the *Lie bracket* (commutator) $[X, Y] = XY - YX$, which measures how much two infinitesimal motions fail to commute. The commutator of two skew-symmetric matrices is skew-symmetric, and by (2.13)

$$\big[[a]_\times, [b]_\times\big] = [a \times b]_\times. \tag{8.2}$$

So $\mathfrak{so}(3)$ with its bracket is $\mathbb{R}^3$ with the cross product. The cross product, which is zero only for parallel vectors, is the infinitesimal version of the non-commutativity of rotations: rotations about parallel axes commute, all others do not.

At a general point $R$, the tangent space consists of the velocities of curves through $R$. From (7.21), every such velocity can be written in two ways,

$$\dot{R} = R\,[\omega_b]_\times = [\omega_w]_\times\,R, \qquad \omega_w = R\,\omega_b, \tag{8.3}$$

so the tangent space at $R$ can be identified with $\mathbb{R}^3$ in two ways: by a vector expressed in the *local* (body) frame, multiplying on the right, or by a vector expressed in the *global* (world) frame, multiplying on the left. This is the origin of the two perturbation conventions of Section 8.9. The project uses the local one.

## 8.5 The exponential map

**Definition 8.3** (Exponential map of SO(3))**.** $\exp : \mathfrak{so}(3) \to \mathrm{SO}(3)$ is the matrix exponential. Composed with the hat map it gives the *capitalized* exponential

$$\mathrm{Exp} : \mathbb{R}^3 \to \mathrm{SO}(3), \qquad \mathrm{Exp}(\phi) = \exp([\phi]_\times). \tag{8.4}$$

By Rodrigues' formula (Theorem 7.2), with $\theta = \|\phi\|$,

$$\mathrm{Exp}(\phi) = I + \frac{\sin\theta}{\theta}\,[\phi]_\times + \frac{1-\cos\theta}{\theta^2}\,[\phi]_\times^2. \tag{8.5}$$

$\mathrm{Exp}(\phi)$ is the rotation by angle $\|\phi\|$ about the axis $\phi/\|\phi\|$. Its main properties are $\mathrm{Exp}(0) = I$, $\mathrm{Exp}(-\phi) = \mathrm{Exp}(\phi)^{\mathsf{T}}$, and $\mathrm{Exp}(s\phi)\,\mathrm{Exp}(t\phi) = \mathrm{Exp}((s+t)\phi)$: rotations about a *common* axis compose by adding angles. Exp is onto SO(3), and one-to-one on the open ball $\|\phi\| < \pi$.

**Why the exponential?** The curve $R(t) = \mathrm{Exp}(t\phi)$ is the motion of a body spinning at the constant body rate $\phi$: it solves $\dot{R} = R[\phi]_\times$ with $R(0) = I$ (Proposition 7.4), and it is a *one-parameter subgroup*, $R(s)R(t) = R(s+t)$. The exponential map thus sends each tangent vector at the identity to the point reached by moving "straight" in that direction for unit time. In every Lie group, the exponential is defined the same way, which is why the same machinery works for SO(3), SE(3) and the extended poses used by invariant filters.

**Quaternion exponential.** The unit quaternion corresponding to $\mathrm{Exp}(\phi)$ follows from (7.14):

$$\mathrm{Exp}_q(\phi) = \begin{bmatrix} \cos(\theta/2) \\ \dfrac{\sin(\theta/2)}{\theta}\,\phi \end{bmatrix}, \qquad R\big(\mathrm{Exp}_q(\phi)\big) = \mathrm{Exp}(\phi). \tag{8.6}$$

This is the quaternion exponential of the pure quaternion $[0, \phi/2]$; the half angle is the double cover again. Since $\mathrm{Exp}_q(\phi)$ has $w = \cos(\theta/2) \geq 0$ for $\theta \leq \pi$, its output is already in canonical form on that range.

### 8.5.1 Numerical evaluation and the Taylor branches

Formulas (8.5) and (8.6), and the Jacobian formulas later in this chapter, are built from a handful of scalar *coefficient functions* of $\theta$:

$$A(\theta) = \frac{\sin\theta}{\theta}, \quad B(\theta) = \frac{1-\cos\theta}{\theta^2}, \quad C(\theta) = \frac{\theta - \sin\theta}{\theta^3}, \quad D(\theta) = \frac{1}{\theta^2} - \frac{\cot(\theta/2)}{2\theta}. \tag{8.7}$$

All four are smooth, even functions with finite limits at $\theta = 0$, but their formulas read $0/0$ there. Their Taylor series are

$$\begin{aligned} A &= 1 - \tfrac{\theta^2}{6} + \tfrac{\theta^4}{120} - \cdots, & B &= \tfrac{1}{2} - \tfrac{\theta^2}{24} + \tfrac{\theta^4}{720} - \cdots, \\ C &= \tfrac{1}{6} - \tfrac{\theta^2}{120} + \tfrac{\theta^4}{5040} - \cdots, & D &= \tfrac{1}{12} + \tfrac{\theta^2}{720} + \tfrac{\theta^4}{30240} + \cdots, \end{aligned} \tag{8.8}$$

and for the quaternion map $\cos\frac{\theta}{2} = 1 - \frac{\theta^2}{8} + \frac{\theta^4}{384} - \cdots$ and $\frac{\sin(\theta/2)}{\theta} = \frac{1}{2} - \frac{\theta^2}{48} + \frac{\theta^4}{3840} - \cdots$.

There are two distinct numerical issues.

1. **Division by zero.** At $\theta = 0$ exactly (a perfectly still IMU, or a zero correction), every formula evaluates to `NaN`, and a single `NaN` propagates through $P$ and destroys the filter. For tiny $\theta$, $\theta^2$ can also underflow to zero.
2. **Cancellation.** $B$, $C$ and $D$ subtract nearly equal quantities. As Figure 8.2(a) shows, their naive evaluation has relative error of order $u/\theta^2$: about $10^{-8}$ at $\theta = 10^{-4}$, and complete loss below $\theta \approx 10^{-8}$. $A$ and the quaternion coefficients involve no subtraction and are accurate everywhere except at $0/0$.

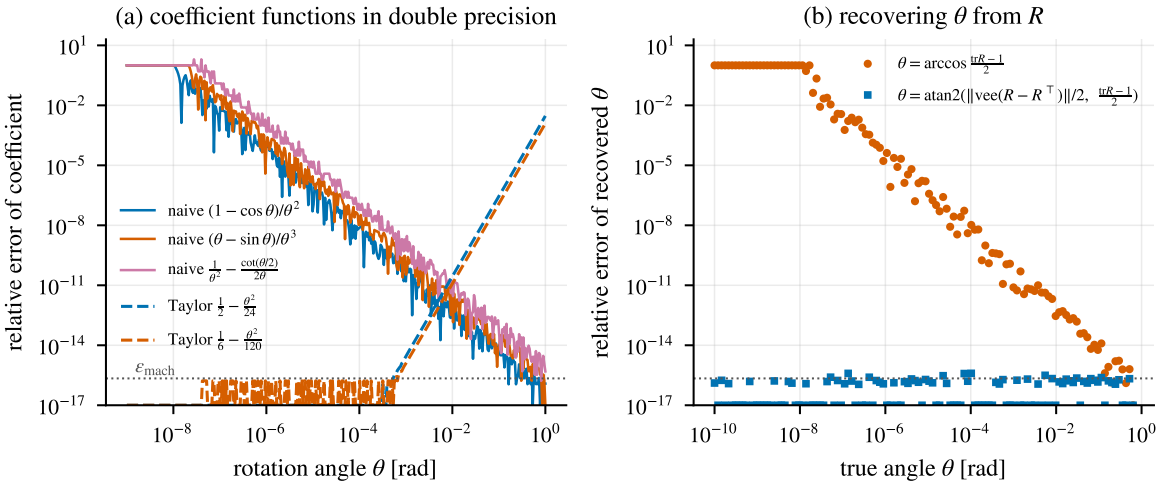



**Figure 8.2:** (a) Relative error of the coefficient functions evaluated naively in double precision (solid) and with a two-term Taylor series (dashed), against a 60-digit reference. The naive error grows like $u/\theta^2$ as $\theta \to 0$, and the truncation error of the series grows like $\theta^4$. (b) Recovering the angle from a rotation matrix: arccos loses accuracy like $u/\theta^2$ and returns exactly zero below $10^{-8}$, while the atan2 form is accurate to machine precision at every angle.

How much does the cancellation matter? It depends on what the coefficient multiplies. A coefficient with absolute error $\epsilon_c$ that multiplies $[\phi]_\times^k$ contributes an error of about $\epsilon_c \theta^k$ to the matrix. For $B$, $C$ and $D$, $\epsilon_c \approx u/\theta^2$, so:

| Function | cancelling coefficient | multiplies | naive absolute error |
|---|---|---|---|
| $\mathrm{Exp}(\phi)$ | $B$ | $[\phi]_\times^2$ | $\approx u$ (harmless) |
| $J_r(\phi)$ | $B$ | $[\phi]_\times$ | $\approx u/\theta$ (**harmful**: $3\times10^{-9}$ at $\theta = 10^{-8}$) |
| $J_r(\phi)$ | $C$ | $[\phi]_\times^2$ | $\approx u$ |
| $J_r^{-1}(\phi)$ | $D$ | $[\phi]_\times^2$ | $\approx u$ |

**Key idea: why the Taylor branch exists, and how to choose its threshold**

Every function needs a guard against $0/0$. Beyond that, the branch matters for accuracy wherever a cancelling coefficient multiplies a low power of $[\phi]_\times$, as in $J_r$. To choose the threshold $\theta_0$ and the number of terms, balance the two error curves of Figure 8.2(a): keeping terms through $\theta^{2m}$ leaves a truncation error of order $\theta^{2m+2}$, and the exact formula has a rounding error of order $u/\theta^2$. Below the crossing point use the series, above it the formula. For two-term series ($m = 1$) the curves cross near $\theta \approx 3\times10^{-3}$, where both relative errors are about $10^{-12}$; adding the $\theta^4$ term moves the crossing to larger angles and lowers the error there. Remember to multiply by $\theta^k$ when translating a coefficient error into a matrix error. Record the choice and this justification next to the code (Milestone 2).

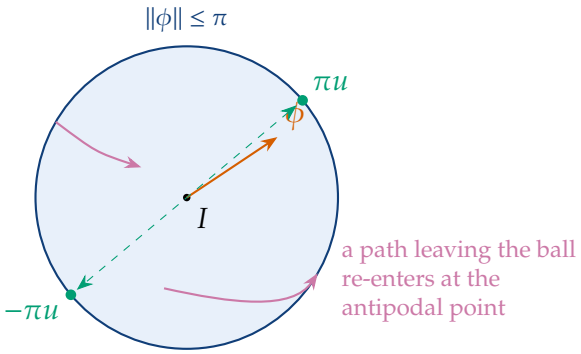



**Figure 8.3:** SO(3) pictured as the ball of rotation vectors of radius $\pi$, with antipodal points on the boundary identified ($\pi u$ and $-\pi u$ are the same rotation). Log is smooth inside the ball but must jump when a rotation crosses $\theta = \pi$. Near the boundary a tiny change in $R$ can flip the returned vector to the opposite side.

## 8.6 The logarithm map

**Definition 8.4** (Logarithm map). $\mathrm{Log} : \mathrm{SO}(3) \to \mathbb{R}^3$ returns the rotation vector $\phi$ with $\|\phi\| \le \pi$ such that $\mathrm{Exp}(\phi) = R$.

For angles strictly between 0 and $\pi$ the answer is unique. Combining the two equations of (7.6),

$$\theta = \operatorname{atan2}\Big(\tfrac{1}{2}\big\|(R - R^{\mathsf{T}})^{\vee}\big\|,\ \tfrac{1}{2}(\operatorname{tr} R - 1)\Big), \qquad \mathrm{Log}(R) = \frac{\theta}{2\sin\theta}\,(R - R^{\mathsf{T}})^{\vee}. \tag{8.9}$$

The atan2 form is essential. The common textbook formula $\theta = \arccos\big((\operatorname{tr} R - 1)/2\big)$ is correct mathematically but numerically unstable near $\theta = 0$, where arccos has infinite slope, and loses half the significant digits (Figure 8.2b). Three regimes need care in code.

1. **Small angles.** $\theta/(2\sin\theta) \to \tfrac{1}{2}$, so use $\mathrm{Log}(R) \approx \tfrac{1}{2}(1 + \tfrac{\theta^2}{6})(R - R^{\mathsf{T}})^{\vee}$.
2. **Generic angles.** Use (8.9) directly.
3. **Angles near $\pi$.** $\sin\theta \to 0$ and $(R - R^{\mathsf{T}})^{\vee} = 2\sin\theta\, u$ vanishes, so the axis cannot be recovered from the skew-symmetric part. Use the symmetric part instead: from (7.5), $\tfrac{1}{2}(R + R^{\mathsf{T}}) = \cos\theta\, I + (1 - \cos\theta)\, uu^{\mathsf{T}}$, so $uu^{\mathsf{T}} = \big(\tfrac{1}{2}(R + R^{\mathsf{T}}) - \cos\theta\, I\big)/(1 - \cos\theta)$. Take the column with the largest diagonal entry, normalize it to get $\pm u$, and fix the sign so that $u^{\mathsf{T}}(R - R^{\mathsf{T}})^{\vee} \ge 0$.

*Remark* **8.5** (why Log is ill-conditioned near $\pi$). Near $\theta = \pi$ two different effects combine. Algebraically, the axis must be extracted from a nearly vanishing skew-symmetric part, so the naïve formula amplifies rounding errors by $1/\sin\theta$. Topologically, Log is discontinuous at $\theta = \pi$ (Figure 8.3): a rotation by $\pi - \epsilon$ about $u$ and one by $\pi - \epsilon$ about $-u$ are close in SO(3) but have Log values $2\pi$ apart. No implementation can remove the second effect. In an estimator it rarely matters, because Log is applied to *differences* between nearby rotations, whose angles are small. Milestone 2 nevertheless tests the near-$\pi$ regime, because a broken branch there produces `NaN`.

**Quaternion logarithm.** For a unit quaternion $q = [w, v]$, first canonicalize to $w \geq 0$ (replace $q$ by $-q$ if needed), then

$$\operatorname{Log}_q(q) = 2\ \operatorname{atan2}(\|v\|, w)\,\frac{v}{\|v\|} \;\approx\; \frac{2}{w}\Big(1 - \frac{\|v\|^2}{3w^2}\Big)\,v \quad \text{for small } \|v\|. \tag{8.10}$$

Canonicalization guarantees $\|\operatorname{Log}_q(q)\| \leq \pi$ and makes $\operatorname{Log}_q(q) = \operatorname{Log}_q(-q)$, so the double cover is invisible to the estimator. The atan2 is well-conditioned at all angles, including near $\pi$ where $w \approx 0$: the quaternion logarithm does not suffer the algebraic ill-conditioning of the matrix version. The topological discontinuity at $\pi$ remains.

## 8.7 The adjoint: moving a perturbation across a rotation

**Proposition 8.6** (Adjoint of SO(3)). *For all $R \in \mathrm{SO}(3)$ and $\phi \in \mathbb{R}^3$,*

$$R\ \operatorname{Exp}(\phi)\,R^{\mathsf{T}} = \operatorname{Exp}(R\phi), \tag{8.11}$$

*or equivalently $\operatorname{Exp}(\phi)\,R = R\ \operatorname{Exp}(R^{\mathsf{T}}\phi)$ and $R\ \operatorname{Exp}(\phi) = \operatorname{Exp}(R\phi)\,R$.*

*Proof.* By (2.14), $R[\phi]_\times R^{\mathsf{T}} = [R\phi]_\times$. By property 4 of Proposition 3.14, $R\exp([\phi]_\times)R^{\mathsf{T}} = \exp(R[\phi]_\times R^{\mathsf{T}}) = \exp([R\phi]_\times)$. The equivalent forms follow by multiplying on the right or left by $R$ or $R^{\mathsf{T}}$. ∎

The map $\phi \mapsto R\phi$ is the *adjoint action* $\mathrm{Ad}_R$, which for SO(3) is simply the rotation matrix itself. Geometrically, a rotation about an axis $\phi$ expressed in one frame equals the rotation about the same physical axis expressed in another frame. Equation (8.11) is the single most used identity in Jacobian derivations: it lets you slide a perturbation $\operatorname{Exp}(\delta)$ through other rotations until it reaches the position the convention requires.

## 8.8 Composition and the Baker–Campbell–Hausdorff formula


Rotations about different axes do not commute, so $\operatorname{Exp}(a)\operatorname{Exp}(b) \neq \operatorname{Exp}(a+b)$ in general. The Baker–Campbell–Hausdorff (BCH) formula quantifies the discrepancy. For matrices $X, Y$ near zero,

$$\log\big(\exp X \exp Y\big) = X + Y + \tfrac{1}{2}[X,Y] + \tfrac{1}{12}\big([X,[X,Y]] + [Y,[Y,X]]\big) + \cdots, \tag{8.12}$$

where $[X,Y] = XY - YX$. For $\mathfrak{so}(3)$, (2.13) gives $[[a]_\times, [b]_\times] = [a \times b]_\times$, so

$$\operatorname{Log}\big(\operatorname{Exp}(a)\operatorname{Exp}(b)\big) = a + b + \tfrac{1}{2}\,a \times b + \tfrac{1}{12}\big(a \times (a \times b) + b \times (b \times a)\big) + \cdots. \tag{8.13}$$

*Derivation of the second-order term.* Expand both exponentials to second order: $\exp X \exp Y = (I + X + \frac{1}{2}X^2)(I + Y + \frac{1}{2}Y^2) + O(3) = I + X + Y + \frac{1}{2}X^2 + XY + \frac{1}{2}Y^2 + O(3)$, where $O(3)$ collects terms of third order in $X$ and $Y$. Write the result as $\exp Z$ with $Z = X + Y + Z_2 + O(3)$ and $Z_2$ of second order. Then $\exp Z = I + Z + \frac{1}{2}Z^2 + O(3) = I + X + Y + Z_2 + \frac{1}{2}(X+Y)^2 + O(3)$. Comparing the two expansions, $Z_2 = \frac{1}{2}X^2 + XY + \frac{1}{2}Y^2 - \frac{1}{2}(X^2 + XY + YX + Y^2) = \frac{1}{2}(XY - YX)$.




Local: $R = \hat{R}\,\mathrm{Exp}(\delta\theta_b)$ **(this project)**
Global: $R = \mathrm{Exp}(\delta\theta_w)\hat{R}$
Same error: $\delta\theta_w = \hat{R}\,\delta\theta_b$
Covariances: $P_w = \hat{R}P_b\hat{R}^\mathsf{T}$

**Figure 8.4:** The local (right) perturbation measures the attitude error as a small rotation about the axes of the *estimated* body frame. The global (left) perturbation measures the same error about the world axes.

The higher-order terms are obtained the same way, with more patience; they involve only nested brackets, a theorem in itself. ■

The first correction is second order. Two small rotations therefore compose approximately additively, $\mathrm{Exp}(a)\,\mathrm{Exp}(b) \approx \mathrm{Exp}(a+b)$, with an error of order $\|a\|\|b\|$. When only one of them is small, summing the BCH series in the large argument gives the two most important first-order formulas of this chapter:

$$\mathrm{Log}\left(\mathrm{Exp}(\phi)\,\mathrm{Exp}(\delta)\right) = \phi + J_r^{-1}(\phi)\,\delta + O(\|\delta\|^2), \tag{8.14}$$

$$\mathrm{Log}\left(\mathrm{Exp}(\delta)\,\mathrm{Exp}(\phi)\right) = \phi + J_l^{-1}(\phi)\,\delta + O(\|\delta\|^2), \tag{8.15}$$

with the Jacobians $J_r$ and $J_l$ defined in Section 8.10.

## 8.9 Perturbations, ⊞ and ⊟

Let $\hat{R}$ be an estimate and $R$ the truth. There are two natural ways to write the small rotation separating them:

$$\underbrace{R = \hat{R}\,\mathrm{Exp}(\delta\theta_b)}_{\text{local (right) perturbation}} \qquad \underbrace{R = \mathrm{Exp}(\delta\theta_w)\,\hat{R}}_{\text{global (left) perturbation}}. \tag{8.16}$$

By Proposition 8.6 they describe the same error, related by $\delta\theta_w = \hat{R}\,\delta\theta_b$. $\delta\theta_b$ is the error expressed in the estimated body frame, $\delta\theta_w$ the same error expressed in the world frame. If $\delta\theta_b \sim \mathcal{N}(0, P_b)$, then $\delta\theta_w \sim \mathcal{N}(0, \hat{R}P_b\hat{R}^\mathsf{T})$.

Both conventions are mathematically valid and widely used, but they are not interchangeable. Every Jacobian, covariance and residual depends on the choice. The project uses the local one for three reasons.

1. **It matches the sensor.** The gyroscope measures $\omega_b$ in the body frame and (7.21) puts it on the right, so body-frame errors couple to body-frame quantities.
2. **It is decoupled from global yaw.** The local attitude error dynamics (Chapter 17) depend on $\hat{\omega}$ and the biases but not on the absolute heading.
3. **It is the convention of the standard ESKF reference [47],** which makes the literature easy to cross-check.

**Frozen convention: retraction and local difference, AGENTS.md C4**

For the full state $x = (p, v, q, b_a, b_g, \{p_i, q_i\})$ and $\delta x \in \mathbb{R}^{15+6N}$:

$$x = \hat{x} \boxplus \delta x: \quad p = \hat{p} + \delta p, \quad v = \hat{v} + \delta v, \quad q = \hat{q} \otimes \mathrm{Exp}_q(\delta\theta), \quad b = \hat{b} + \delta b,$$
$$\delta x = x \boxminus \hat{x}: \quad \delta\theta = \mathrm{Log}_q(\hat{q}^{-1} \otimes q), \quad \text{all other blocks subtract.}$$

Clone blocks follow the same rule. Every residual, Jacobian, injection and numerical-differentiation test uses these two operators and nothing else.

The operators satisfy the axioms that make them a consistent local parameterization:

$$x \boxplus 0 = x, \qquad (x \boxplus \delta) \boxminus x = \delta, \qquad x \boxplus (y \boxminus x) = y, \tag{8.17}$$

the second for $\|\delta\theta\| < \pi$ and the third for any $y$. The state is a *product manifold* $\mathbb{R}^3 \times \mathbb{R}^3 \times \mathrm{SO}(3) \times \mathbb{R}^3 \times \mathbb{R}^3 \times (\mathbb{R}^3 \times \mathrm{SO}(3))^N$. Each factor has its own $\boxplus$, and the composite operator acts block-wise.

## 8.10 Jacobians on manifolds

**Definition 8.7** (Jacobian with respect to local perturbations)**.** Let $f : \mathcal{M} \to \mathcal{N}$ map between manifolds with $\boxplus/\boxminus$ operators. Its Jacobian at $x$ is the matrix

$$J_x^f = \frac{\partial}{\partial \delta}\Big[f(x \boxplus \delta) \boxminus f(x)\Big]_{\delta=0}, \qquad \text{so that} \qquad f(x \boxplus \delta) = f(x) \boxplus \big(J_x^f\, \delta + O(\|\delta\|^2)\big). \tag{8.18}$$

When both spaces are vector spaces this is the ordinary Jacobian. The chain rule holds unchanged, $J_x^{g\circ f} = J_{f(x)}^g J_x^f$, so complicated Jacobians are products of simple ones. The column $j$ of $J_x^f$ is what a finite-difference test computes by perturbing direction $j$, which is how every such Jacobian is verified.

### 8.10.1 The right and left Jacobians of SO(3)

**Definition 8.8** (Right and left Jacobians)**.** The *right Jacobian* $J_r(\phi)$ is the Jacobian of $\mathrm{Exp} : \mathbb{R}^3 \to \mathrm{SO}(3)$ with the local $\boxminus$ on SO(3); the *left Jacobian* $J_l(\phi)$ uses the global one:

$$\mathrm{Exp}(\phi + \delta) = \mathrm{Exp}(\phi)\ \mathrm{Exp}\left(J_r(\phi)\,\delta\right) + O(\|\delta\|^2) = \mathrm{Exp}\left(J_l(\phi)\,\delta\right)\ \mathrm{Exp}(\phi) + O(\|\delta\|^2). \tag{8.19}$$

$J_r(\phi)$ answers the question: if I change the rotation *vector* $\phi$ by $\delta$, what small *body-frame* rotation does the rotation *matrix* undergo? Only for $\phi = 0$ is the answer $\delta$ itself.

**Theorem 8.9** (Closed forms)**.** *With* $\theta = \|\phi\|$,

$$J_r(\phi) = \int_0^1 \mathrm{Exp}(-s\phi)\,\mathrm{d}s = I - \frac{1-\cos\theta}{\theta^2}[\phi]_\times + \frac{\theta - \sin\theta}{\theta^3}[\phi]_\times^2, \tag{8.20}$$

$$J_r^{-1}(\phi) = I + \tfrac{1}{2}[\phi]_\times + \left(\frac{1}{\theta^2} - \frac{1+\cos\theta}{2\theta\sin\theta}\right)[\phi]_\times^2, \tag{8.21}$$

$$J_l(\phi) = J_r(-\phi) = J_r(\phi)^{\mathsf{T}} = \mathrm{Exp}(\phi)\,J_r(\phi), \qquad J_l^{-1}(\phi) = J_r^{-1}(-\phi). \tag{8.22}$$

*The coefficient in (8.21) equals $D(\theta) = \frac{1}{\theta^2} - \frac{\cot(\theta/2)}{2\theta}$, which is finite at $\theta = \pi$ (where $D = 1/\pi^2$) and singular only at $\theta = 2\pi$.*

*Proof. Step 1: the derivative of the matrix exponential.* Let $K(t) = \exp\big(t(X + \epsilon Y)\big)$, which solves $\dot{K} = (X + \epsilon Y)K$, $K(0) = I$. Its derivative with respect to $\epsilon$ at $\epsilon = 0$, $W(t) = \partial K/\partial\epsilon$, solves the equation obtained by differentiating the ODE: $\dot{W} = XW + Y\exp(tX)$, $W(0) = 0$. This is a linear ODE with an input, so by variation of constants (Proposition 4.7) $W(t) = \int_0^t \exp((t-s)X)\, Y \exp(sX)\, \mathrm{d}s$. At $t = 1$, after substituting $s \to 1 - s$,

$$\frac{\mathrm{d}}{\mathrm{d}\epsilon}\exp(X + \epsilon Y)\Big|_{\epsilon=0} = \int_0^1 \exp(sX)\, Y \exp((1-s)X)\, \mathrm{d}s.$$

*Step 2: the integral form.* With $X = [\phi]_\times$ and $Y = [\delta]_\times$,

$$\begin{aligned}\operatorname{Exp}(\phi)^{-1}\frac{\mathrm{d}}{\mathrm{d}\epsilon}\operatorname{Exp}(\phi + \epsilon\delta)\Big|_0 &= \int_0^1 \operatorname{Exp}(-(1-s)\phi)\,[\delta]_\times \operatorname{Exp}((1-s)\phi)\,\mathrm{d}s \\ &= \Big[\int_0^1 \operatorname{Exp}(-s\phi)\,\mathrm{d}s\ \delta\Big]_\times,\end{aligned}$$

using $R[\delta]_\times R^\mathsf{T} = [R\delta]_\times$ with $R = \operatorname{Exp}(-(1-s)\phi)$ and substituting $s \to 1-s$ again. Comparing with $\operatorname{Exp}(\phi)\operatorname{Exp}(\epsilon J_r\delta) = \operatorname{Exp}(\phi)(I + \epsilon[J_r\delta]_\times) + O(\epsilon^2)$ gives $J_r(\phi) = \int_0^1 \operatorname{Exp}(-s\phi)\,\mathrm{d}s$.

*Step 3: the closed form.* With $u = \phi/\theta$, Rodrigues' formula gives $\operatorname{Exp}(-s\phi) = I - \sin(s\theta)[u]_\times + (1 - \cos(s\theta))[u]_\times^2$. Integrating term by term, $\int_0^1 \sin(s\theta)\,\mathrm{d}s = (1 - \cos\theta)/\theta$ and $\int_0^1(1 - \cos(s\theta))\,\mathrm{d}s = 1 - \sin\theta/\theta$, so $J_r = I - \frac{1-\cos\theta}{\theta}[u]_\times + \big(1 - \frac{\sin\theta}{\theta}\big)[u]_\times^2$; substituting $[u]_\times = [\phi]_\times/\theta$ gives (8.20).

*Step 4: the inverse.* Write $K = [\phi]_\times$, $J_r = I - BK + CK^2$ with the coefficients $B$ and $C$ of (8.20), and look for the inverse in the same form, $I + aK + bK^2$. Multiplying out and reducing $K^3 = -\theta^2 K$ and $K^4 = -\theta^2 K^2$, the product equals $I$ exactly when

$$a - B + \theta^2(bB - aC) = 0, \qquad b - aB + C - \theta^2 bC = 0.$$

These two linear equations have the solution $a = \frac{1}{2}$ and $b = D(\theta)$ (substitute the trigonometric expressions and simplify, or check numerically), which is (8.21); the identity $\frac{1+\cos\theta}{\sin\theta} = \cot\frac{\theta}{2}$ gives the form of $D$.

*Step 5: the left Jacobian.* By Proposition 8.6, $\operatorname{Exp}(\phi)\operatorname{Exp}(J_r\delta) = \operatorname{Exp}(\operatorname{Exp}(\phi)J_r\delta)\operatorname{Exp}(\phi)$, so $J_l = \operatorname{Exp}(\phi)J_r$. Repeating steps 1–3 with the perturbation on the left gives $J_l = \int_0^1 \operatorname{Exp}(s\phi)\,\mathrm{d}s$, which is $J_r(-\phi)$ and, since $\operatorname{Exp}(s\phi)^\mathsf{T} = \operatorname{Exp}(-s\phi)$, also $J_r(\phi)^\mathsf{T}$. ∎

The small-angle expansions are $J_r(\phi) = I - \frac{1}{2}[\phi]_\times + \frac{1}{6}[\phi]_\times^2 + O(\theta^3)$ and $J_r^{-1}(\phi) = I + \frac{1}{2}[\phi]_\times + \frac{1}{12}[\phi]_\times^2 + O(\theta^4)$, with the coefficient series of (8.8). Equations (8.14) and (8.15) follow from (8.19) by inverting the relation.

### 8.10.2 Elementary Jacobians

The entries of Table 8.1 are derived in two or three lines each. The method is always the same: **perturb, expand to first order, isolate the perturbation, and read off the coefficient.**

| Function | Jacobian w.r.t. local perturbation | Note |
|---|---|---|
| $f(R) = Rv$ | $\dfrac{\partial f}{\partial \delta\theta} = -R[v]_\times$ | rotate a body vector to world |
| $f(R) = R^\mathsf{T} v$ | $\dfrac{\partial f}{\partial \delta\theta} = [R^\mathsf{T} v]_\times$ | express a world vector in body |
| $f(R) = R^{-1}$ | $J = -R$ | output on SO(3) (local) |
| $f(R_1, R_2) = R_1 R_2$ | $J_{R_1} = R_2^\mathsf{T}, \quad J_{R_2} = I$ | output on SO(3) (local) |
| $f(\phi) = \mathrm{Exp}(\phi)$ | $J = J_r(\phi)$ | vector to SO(3) |
| $f(R) = \mathrm{Log}(R)$ | $J = J_r^{-1}(\mathrm{Log}\, R)$ | SO(3) to vector |
| $f(\phi) = \mathrm{Exp}(\phi)\, v$ | $\dfrac{\partial f}{\partial \phi} = -\mathrm{Exp}(\phi)[v]_\times J_r(\phi)$ | rotation vector acting on $v$ |
| $f(v) = Rv$ | $J = R$ | ordinary linear map |

**Table 8.1:** Elementary Jacobians with respect to the local (right) perturbation $R \to R\,\mathrm{Exp}(\delta\theta)$. All other Jacobians in these notes are products of these by the chain rule. Each entry has been checked numerically by central differences.

**Example 8.10** (Rotation action)**.** For $f(R) = Rv$: $f(R\,\mathrm{Exp}(\delta\theta)) = R(I + [\delta\theta]_\times)v + O(\|\delta\theta\|^2) = Rv + R[\delta\theta]_\times v$. By (2.8), $[\delta\theta]_\times v = -[v]_\times \delta\theta$, so the Jacobian is $-R[v]_\times$.

**Example 8.11** (Inverse action)**.** For $f(R) = R^\mathsf{T} v$: $(R\,\mathrm{Exp}(\delta\theta))^\mathsf{T} v = \mathrm{Exp}(-\delta\theta)R^\mathsf{T} v \approx (I - [\delta\theta]_\times)R^\mathsf{T} v = R^\mathsf{T} v + [R^\mathsf{T} v]_\times\, \delta\theta$.

**Example 8.12** (Inverse and composition)**.** For $f(R) = R^{-1}$: $(R\,\mathrm{Exp}(\delta\theta))^{-1} = \mathrm{Exp}(-\delta\theta)R^\mathsf{T} = R^\mathsf{T}\,\mathrm{Exp}(-R\delta\theta)$ by (8.11), so $f(R)^{-1} f(R \boxplus \delta\theta) = \mathrm{Exp}(-R\delta\theta)$ and the Jacobian is $-R$. For $f = R_1 R_2$ perturbed in $R_1$: $R_1\,\mathrm{Exp}(\delta\theta)R_2 = R_1 R_2\,\mathrm{Exp}(R_2^\mathsf{T}\delta\theta)$, so $J_{R_1} = R_2^\mathsf{T}$. Perturbing $R_2$ appends $\mathrm{Exp}(\delta\theta)$ directly, so $J_{R_2} = I$.

**Example 8.13** (Logarithm)**.** For $f(R) = \mathrm{Log}(R)$ with $\phi = \mathrm{Log}\, R$: $\mathrm{Log}(R\,\mathrm{Exp}(\delta\theta)) = \mathrm{Log}(\mathrm{Exp}(\phi)\,\mathrm{Exp}(\delta\theta)) \approx \phi + J_r^{-1}(\phi)\delta\theta$ by (8.14).

**Example 8.14** (A chain: a rotation vector acting on a vector)**.** For $f(\phi) = \mathrm{Exp}(\phi)v$, with $\phi$ an ordinary vector: $\mathrm{Exp}(\phi + \delta)v = \mathrm{Exp}(\phi)\,\mathrm{Exp}(J_r\delta)v \approx \mathrm{Exp}(\phi)(v + [J_r\delta]_\times v) = \mathrm{Exp}(\phi)v - \mathrm{Exp}(\phi)[v]_\times J_r(\phi)\delta$. This is the chain rule: the Jacobian of Exp (namely $J_r$) followed by the Jacobian of the rotation action (namely $-R[v]_\times$). It is the Jacobian one needs when a filter uses a rotation vector, rather than a perturbation of a rotation, as its state.

**Pitfall: first-order expansions and products**

The expansion $\mathrm{Exp}(\delta\theta) \approx I + [\delta\theta]_\times$ is valid only when $\delta\theta$ is the *only* small quantity being differentiated. Products of two small quantities ($[\delta\theta]_\times \delta b$, or $[\delta\theta]_\times n$ with noise $n$) are second order and are dropped. Large quantities such as the nominal rotation, the angular rate or the specific force are never approximated.

## 8.11 Uncertainty on SO(3)

With the local perturbation, an uncertain attitude is the random rotation

$$R = \hat{R}\,\mathrm{Exp}(\delta\theta), \qquad \delta\theta \sim \mathcal{N}(0, P_\theta), \tag{8.23}$$

a "Gaussian on the manifold": the mean $\hat{R}$ lives on SO(3) and the covariance $P_\theta$ lives in the tangent space at $\hat{R}$, in body-frame coordinates. Its eigenvectors are body axes about which the attitude is most or least certain. This distribution is not a Gaussian in any fixed coordinates of SO(3), which is exactly why it captures curved distributions such as the banana of Figure 5.4 better than a Gaussian on Euler angles or matrix entries.

**Propagation.** If $y = f(R)$ and $J$ is its manifold Jacobian, then to first order $y = f(\hat{R}) \boxplus \delta y$ with $\delta y \approx J\delta\theta \sim \mathcal{N}(0, JP_\theta J^\mathsf{T})$.

**Compounding.** For independent uncertain rotations $R_1 = \hat{R}_1\,\mathrm{Exp}(\delta_1)$ and $R_2 = \hat{R}_2\,\mathrm{Exp}(\delta_2)$, the composition is $R_1R_2 = \hat{R}_1\hat{R}_2\,\mathrm{Exp}(\hat{R}_2^\mathsf{T}\delta_1)\,\mathrm{Exp}(\delta_2) \approx \hat{R}_1\hat{R}_2\,\mathrm{Exp}(\hat{R}_2^\mathsf{T}\delta_1 + \delta_2)$, so

$$P_{12} = \hat{R}_2^\mathsf{T} P_1 \hat{R}_2 + P_2. \tag{8.24}$$

***Remark* 8.15** (covariance entries rotate between axes)**.** Because $P_\theta$ is expressed in body axes, it changes when the body rotates even if no information is gained or lost. Suppose the world yaw is uncertain and roll and pitch are perfectly known: in world coordinates $P_w = \sigma^2 e_z e_z^\mathsf{T}$. In body coordinates $P_b = \hat{R}^\mathsf{T} P_w \hat{R} = \sigma^2(\hat{R}^\mathsf{T}e_z)(\hat{R}^\mathsf{T}e_z)^\mathsf{T}$. If the vehicle rolls by 90°, the world vertical is the body $y$-axis, and the yaw uncertainty moves from the $(z, z)$ to the $(y, y)$ entry of $P$. Individual diagonal entries of the attitude covariance are therefore not monotonic during propagation (a Milestone 5 concept), although its trace and eigenvalues behave as expected.

### 8.11.1 Averaging rotations

How should several noisy measurements $R_1, \ldots, R_N$ of the same attitude be averaged? The arithmetic mean of matrices (or of quaternions) is not a rotation, and the average of Euler angles is meaningless near wrap-around. The natural definition is the rotation that minimizes the sum of squared tangent-space distances, $\bar{R} = \arg\min \sum_i \|\,\mathrm{Log}(\bar{R}^\mathsf{T}R_i)\|^2$. It is computed by the fixed-point iteration

$$\bar{R} \leftarrow \bar{R}\,\mathrm{Exp}\Big(\frac{1}{N}\sum_{i=1}^{N}\mathrm{Log}\left(\bar{R}^\mathsf{T}R_i\right)\Big), \tag{8.25}$$

which averages the residuals in the tangent space at the current estimate and moves the estimate by that average, exactly as one would average vectors, but on the manifold. It converges in a few iterations when the rotations are within a few tens of degrees of each other. A faster approximation projects the arithmetic mean $M = \frac{1}{N}\sum_i R_i$ onto SO(3) with the SVD: if $M = U\Sigma V^\mathsf{T}$, the closest rotation is $U\,\mathrm{diag}(1, 1, \det(UV^\mathsf{T}))V^\mathsf{T}$ (the same construction as in Proposition 19.3).

## 8.12 SE(3) and the choice of state manifold

The rigid transformations $T = \begin{bmatrix} R & p \\ 0 & 1 \end{bmatrix}$ of Chapter 7 also form a Lie group, SE(3), of dimension six.

**Lie algebra.** Differentiating a curve $T(t)$ through the identity gives elements of the form $\xi^\wedge = \begin{bmatrix} [\phi]_\times & \rho \\ 0 & 0 \end{bmatrix}$, parameterized by $\xi = (\rho, \phi) \in \mathbb{R}^6$: an angular velocity $\phi$ and a linear velocity $\rho$, together a *twist*.

**Exponential.** The powers of $\xi^\wedge$ are $\begin{bmatrix} K^k & K^{k-1}\rho \\ 0 & 0 \end{bmatrix}$ for $k \geq 1$, with $K = [\phi]_\times$, so the exponential series gives

$$\operatorname{Exp}(\rho, \phi) = \begin{bmatrix} \operatorname{Exp}(\phi) & J_l(\phi)\,\rho \\ 0 & 1 \end{bmatrix}, \qquad J_l(\phi) = \sum_{k \geq 0} \frac{K^k}{(k+1)!}, \tag{8.26}$$

where the series is the left Jacobian of Theorem 8.9 (expand $\int_0^1 \operatorname{Exp}(s\phi)\,\mathrm{d}s$ term by term). Moving with a constant twist traces a *screw motion*: rotation about an axis combined with translation along it. The logarithm inverts the two blocks: $\phi = \operatorname{Log}(R)$ and $\rho = J_l(\phi)^{-1} p$.

**Adjoint.** Conjugation $T \operatorname{Exp}(\xi) T^{-1} = \operatorname{Exp}(\operatorname{Ad}_T \xi)$ holds with the $6 \times 6$ matrix

$$\operatorname{Ad}_T = \begin{bmatrix} R & [p]_\times R \\ 0 & R \end{bmatrix}, \tag{8.27}$$

obtained by multiplying out $T\xi^\wedge T^{-1}$. It transforms twists between frames, and plays the same role for poses as $R$ does for rotation vectors.

**Which manifold for the state?** Perturbing a pose on SE(3), $T = \hat{T} \operatorname{Exp}(\delta\xi)$, expresses the translation error in the body frame and couples it to the rotation error through $J_l$. The project does *not* do this: its state is the product manifold of Section 8.9, in which the position error is a plain world-frame vector and the attitude error is a local rotation, independently. To first order the two are related by a rotation of the translation error ($\delta p_w \approx \hat{R}\,\delta\rho$); they differ at second order. Both choices are valid, but they produce different Jacobians and different covariances, and must never be mixed. A third choice, the extended pose group $\mathrm{SE}_2(3)$ of $5 \times 5$ matrices $\begin{bmatrix} R & v & p \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$ collecting attitude, velocity and position, underlies the *invariant* EKF, whose error dynamics have the striking property of not depending on the state at all (Chapter 29).

## 8.13 Verifying manifold Jacobians numerically

Every analytic Jacobian in the project is checked against a central difference built on the $\boxplus/\boxminus$ operators (AGENTS.md E6). Column $j$ of the numerical Jacobian is

$$J_{:,j} \approx \frac{f(x \boxplus he_j) \boxminus f(x \boxplus (-he_j))}{2h}, \qquad h \approx 10^{-6}. \tag{8.28}$$

The central difference has truncation error $O(h^2)$ and rounding error $O(u/h)$ (Section 4.4), so analytic and numerical Jacobians should agree to about $10^{-8}$ relative to the magnitude of the entries.

**Pitfall: tests that cannot fail**

A Jacobian test evaluated at a trivial point proves little. At $R = I$, $R$ and $R^\mathsf{T}$ are equal, so a transpose bug is invisible; with zero angular rate, terms multiplied by $\hat{\omega}$ vanish; with zero biases, bias-sign errors may hide. Always test at a random non-identity attitude, non-zero rates, accelerations and biases, and ask of every test: *would this still pass if I flipped the sign of X?* A good habit is to temporarily break the analytic Jacobian and confirm that the test fails.

**Project link: Milestone 2**

`so3.hpp` implements `skew`, `Exp/Log`, `Exp_q/Log_q`, `J_r` and `J_r_inv` as derived here, and `numerical_jacobian.hpp` implements (8.28) generically over $\boxplus/\boxminus$. The exit criteria test exactly the properties of this chapter: $\mathrm{Exp}(\phi) \in \mathrm{SO}(3)$, $\mathrm{Log} \circ \mathrm{Exp} = \mathrm{id}$ at zero, tiny, generic and near-$\pi$ angles, agreement of $\mathrm{Exp}_q$ and Exp, $\mathrm{Log}_q(q) = \mathrm{Log}_q(-q)$, the defining relation (8.19) of $J_r$, and $J_r^{-1} J_r = I$, all without allocation.

**Key takeaways**

- Attitude lives on the curved manifold SO(3); its errors live in the flat tangent space $\mathbb{R}^3$. Exp and Log connect them.
- Compute angles with atan2, never with arccos. Guard every coefficient function against 0/0, and use Taylor branches wherever cancellation is amplified (notably in $J_r$).
- Local (right) perturbation: $R = \hat{R}\,\mathrm{Exp}(\delta\theta)$, error in body axes. Global errors are $\hat{R}\,\delta\theta$.
- The adjoint identity $R\,\mathrm{Exp}(\phi)R^\mathsf{T} = \mathrm{Exp}(R\phi)$ moves perturbations through rotations.
- $\mathrm{Exp}(\phi + \delta) \approx \mathrm{Exp}(\phi)\,\mathrm{Exp}(J_r(\phi)\delta)$ and $\mathrm{Log}(\mathrm{Exp}(\phi)\,\mathrm{Exp}(\delta)) \approx \phi + J_r^{-1}(\phi)\delta$.
- Every project Jacobian is a chain-rule product of the entries of Table 8.1, and is verified by central differences at a non-trivial point.

## Exercises

**8.1** Show that $\mathfrak{so}(3)$ is closed under the commutator $[X, Y] = XY - YX$ and that $[[a]_\times, [b]_\times] = [a \times b]_\times$.

**8.2** Prove $\mathrm{Exp}(-\phi) = \mathrm{Exp}(\phi)^\mathsf{T}$ and $\mathrm{Exp}(s\phi)\,\mathrm{Exp}(t\phi) = \mathrm{Exp}((s+t)\phi)$. Why does the second identity not contradict non-commutativity?

**8.3** Implement Log with both arccos and atan2 and reproduce Figure 8.2(b). Then construct a rotation within $10^{-6}$ rad of $\pi$ and test the near-$\pi$ branch.

**8.4** Using the coefficient series of (8.8), choose a threshold and a number of terms for $J_r$ so that its absolute error stays below $10^{-14}$ for all $\theta \in [0, 0.1]$. Justify your choice with the error model of Section 8.5.1.

**8.5** Derive the Jacobian of $f(R) = \mathrm{Log}(\hat{R}^\mathsf{T} R)$ with respect to a local perturbation of $R$, and of $g(\hat{R}) = \mathrm{Log}(\hat{R}^\mathsf{T} R)$ with respect to a local perturbation of $\hat{R}$. Evaluate both at $R = \hat{R}$. (These are the building blocks of attitude residuals.)

**8.6** Show that $J_l(\phi) = \mathrm{Exp}(\phi) J_r(\phi)$ and use it to prove (8.15) from (8.14).

**8.7** A vehicle has attitude covariance $P_b = \mathrm{diag}(\sigma_r^2, \sigma_r^2, \sigma_y^2)$ in body axes while level. Compute $P_b$ after it pitches by $90^\circ$ with no new information, and interpret.

**8.8** Verify every row of Table 8.1 with a 20-line Python script using central differences at a random point. Then flip one sign and confirm your script detects it.

## Solutions to the exercises

**8.1** If $X^\mathsf{T} = -X$ and $Y^\mathsf{T} = -Y$ then $[X,Y]^\mathsf{T} = Y^\mathsf{T}X^\mathsf{T} - X^\mathsf{T}Y^\mathsf{T} = YX - XY = -[X,Y]$, so the commutator of two skew-symmetric matrices is skew-symmetric: $\mathfrak{so}(3)$ is closed under the bracket (it is a *Lie algebra*). The formula for the bracket is (2.13): $[[a]_\times, [b]_\times] = [a]_\times[b]_\times - [b]_\times[a]_\times = [a \times b]_\times$, proved in Exercise 2.5. The bracket of two infinitesimal rotations is the infinitesimal rotation about the cross product of their axes.

**8.2** By property 4 of Proposition 3.14, $\operatorname{Exp}(\phi)^\mathsf{T} = \exp([\phi]_\times)^\mathsf{T} = \exp([\phi]_\times^\mathsf{T}) = \exp(-[\phi]_\times) = \operatorname{Exp}(-\phi)$. The matrices $s[\phi]_\times$ and $t[\phi]_\times$ commute (both are multiples of the same matrix), so by property 3, $\exp(s[\phi]_\times)\exp(t[\phi]_\times) = \exp((s+t)[\phi]_\times)$. There is no contradiction: rotations about the *same* axis commute, as planar rotations do (Section 8.2); non-commutativity concerns rotations about different axes. The curve $t \mapsto \operatorname{Exp}(t\phi)$ is a one-parameter subgroup, a commutative copy of SO(2) inside SO(3).

**8.3** For $R = \operatorname{Exp}(\theta u)$ with a fixed unit axis and $\theta$ from $10^{-2}$ down to $10^{-10}$, the relative errors of the two angle formulas are

| $\theta$ | $10^{-2}$ | $10^{-4}$ | $10^{-6}$ | $10^{-8}$ | $10^{-10}$ |
|---|---|---|---|---|---|
| $\arccos\big((\operatorname{tr} R - 1)/2\big)$ | $2\times10^{-12}$ | $3\times10^{-9}$ | $4\times10^{-5}$ | 1 (returns 0) | 1 |
| atan2 form of (8.9) | $2\times10^{-16}$ | 0 | 0 | 0 | 0 |

reproducing Figure 8.2(b): arccos loses accuracy like $u/\theta^2$ because $(\operatorname{tr} R - 1)/2 = \cos\theta \approx 1 - \theta^2/2$ carries an absolute error $u$ that arccos amplifies by $1/\sin\theta$. For the near-$\pi$ test, at $\theta = \pi - 10^{-6}$ the naive formula $\frac{\theta}{2\sin\theta}(R - R^\mathsf{T})^\vee$ is still accurate to $2\times10^{-10}$, but at $\theta = \pi$ it divides 0 by 0 and returns garbage. The branch built from the symmetric part, $uu^\mathsf{T} = (\frac{1}{2}(R + R^\mathsf{T}) - \cos\theta\, I)/(1 - \cos\theta)$, is accurate to $10^{-15}$ at both angles. At exactly $\pi$ both $\pi u$ and $-\pi u$ are correct answers, so the test must accept either sign (or compare Exp of the result with $R$).

**8.4** Write $J_r = I - B[\phi]_\times + C[\phi]_\times^2$. By the error model of Section 8.5.1, the closed forms of $B$ and $C$ have absolute rounding errors of about $u/\theta^2$, multiplied by $\|[\phi]_\times\| = \theta$ and $\|[\phi]_\times^2\| = \theta^2$ respectively; the $B$ term dominates with a matrix error of about $u/\theta$. This is below $10^{-14}$ for $\theta \geq u/10^{-14} \approx 0.011$. A threshold $\theta_0 = 0.02$ therefore makes the closed form safe above it. Below it, a series truncated after the $\theta^{2m}$ term errs by roughly its first omitted term:

- two terms: $B$ errs by $\theta^4/720 \approx 2\times10^{-10}$ at $\theta_0$, times $\theta_0$ gives $4\times10^{-12}$: not enough;
- three terms, $B \approx \frac{1}{2} - \frac{\theta^2}{24} + \frac{\theta^4}{720}$ and $C \approx \frac{1}{6} - \frac{\theta^2}{120} + \frac{\theta^4}{5040}$: the omitted terms $\theta^6/40320$ and $\theta^6/362880$ contribute $\theta_0^7/40320 \approx 3\times10^{-17}$ and less.

So use three terms below $\theta_0 = 0.02$ and the closed form above. Compared with a 50-digit reference, this scheme's largest error over $[0, 0.1]$ is $1.1\times10^{-15}$, while the closed form alone reaches $3.5\times10^{-9}$ at small angles (and `NaN` at zero). The rounding bound $u/\theta$ is pessimistic: at $\theta = 0.02$ the closed form's actual error is $7\times10^{-16}$.

**8.5** Let $\phi = \operatorname{Log}(\hat{R}^{\mathsf{T}} R)$. Perturbing $R$ and $\hat{R}$ locally, and using (8.14) and (8.15),

$$f(R\operatorname{Exp}(\delta)) = \operatorname{Log}\left(\hat{R}^{\mathsf{T}} R \operatorname{Exp}(\delta)\right) = \operatorname{Log}\left(\operatorname{Exp}(\phi)\operatorname{Exp}(\delta)\right) = \phi + J_r^{-1}(\phi)\,\delta + O(\|\delta\|^2),$$
$$g(\hat{R}\operatorname{Exp}(\delta)) = \operatorname{Log}\left(\operatorname{Exp}(-\delta)\hat{R}^{\mathsf{T}} R\right) = \operatorname{Log}\left(\operatorname{Exp}(-\delta)\operatorname{Exp}(\phi)\right) = \phi - J_l^{-1}(\phi)\,\delta + O(\|\delta\|^2),$$

so $\partial f/\partial\delta = J_r^{-1}(\phi)$ and $\partial g/\partial\delta = -J_l^{-1}(\phi)$. At $R = \hat{R}$, $\phi = 0$ and $J_r(0) = J_l(0) = I$, so the Jacobians are $+I$ and $-I$: an attitude residual $\operatorname{Log}(\hat{R}^{\mathsf{T}} R)$ moves one for one with a body-frame error of either rotation, with opposite signs. Away from $R = \hat{R}$ the inverse Jacobians are the corrections an iterated update needs.

**8.6** From (8.19) and the adjoint identity (8.11),

$$\operatorname{Exp}(\phi + \delta) \approx \operatorname{Exp}(\phi)\operatorname{Exp}(J_r\delta) = \operatorname{Exp}\left(\operatorname{Exp}(\phi)J_r\delta\right)\operatorname{Exp}(\phi);$$

comparing with the left form of (8.19) gives $J_l(\phi) = \operatorname{Exp}(\phi)J_r(\phi)$. For the BCH formula, move the left factor to the right with the adjoint:

$$\operatorname{Log}\left(\operatorname{Exp}(\delta)\operatorname{Exp}(\phi)\right) = \operatorname{Log}\left(\operatorname{Exp}(\phi)\operatorname{Exp}(\operatorname{Exp}(\phi)^{\mathsf{T}}\delta)\right) = \phi + J_r^{-1}(\phi)\operatorname{Exp}(\phi)^{\mathsf{T}}\delta + O(\|\delta\|^2),$$

by (8.14), and $J_r^{-1}(\phi)\operatorname{Exp}(\phi)^{\mathsf{T}} = \left(\operatorname{Exp}(\phi)J_r(\phi)\right)^{-1} = J_l^{-1}(\phi)$, which is (8.15).

**8.7** With no new information the world-frame covariance $P_w = \hat{R}P_b\hat{R}^{\mathsf{T}}$ does not change; only its body-frame coordinates do. Level means $\hat{R} = I$; after pitching by 90°, $\hat{R}' = R_y(90°)$, so

$$P_b' = R_y(90°)^{\mathsf{T}} P_b\, R_y(90°) = \operatorname{diag}(\sigma_y^2,\ \sigma_r^2,\ \sigma_r^2).$$

The large yaw uncertainty, which is uncertainty about rotations about the world vertical, now sits in the $(x, x)$ entry, because after the pitch the body $x$-axis is vertical. Nothing was learned or forgotten: the same uncertainty is described in rotated coordinates (Remark 8.15). A test that expects each diagonal entry of $P_{\theta\theta}$ to grow monotonically during propagation is therefore wrong.

**8.8** The script perturbs the input with the appropriate $\boxplus$ and compares central differences, formed with the appropriate $\boxminus$, against each analytic entry at a random point ($\|\phi\| = 1.6$, random $R$, $R_2$, $v$):

```
def num(f, plus, minus, h=1e-6):
    return np.column_stack([minus(f(plus(h * e)), f(plus(-h * e))) / (2 * h) for e in np.eye(3)])
vec = lambda a, b: a - b
rot = lambda a, b: Log(b.T @ a)           # local difference on SO(3)
loc = lambda X: (lambda d: X @ Exp(d))    # local perturbation of a rotation
checks = {"Rv":    (num(lambda X: X @ v, loc(R), vec),       -R @ skew(v)),
          "R^T v": (num(lambda X: X.T @ v, loc(R), vec),     skew(R.T @ v)),
          "R^-1":  (num(lambda X: X.T, loc(R), rot),         -R),
          "R1R2":  (num(lambda X: X @ R2, loc(R), rot),      R2.T),
          "Exp":   (num(Exp, lambda d: phi + d, rot),        Jr(phi)),
          "Log":   (num(Log, loc(Exp(phi)), vec),            Jrinv(phi)),
          "Exp v": (num(lambda p: Exp(p) @ v, lambda d: phi + d, vec), -Exp(phi) @ skew(v) @ Jr(
    phi))}
for name, (n, a) in checks.items(): print(name, np.abs(n - a).max())
```

All rows agree to $10^{-10}$ (the remaining two rows, $\partial(R_1R_2)/\partial R_2 = I$ and $\partial(Rv)/\partial v = R$,

likewise). Replacing $-R[v]_\times$ by $+R[v]_\times$ raises the first error to about 3: the test detects the flipped sign by ten orders of magnitude, as a good test should.

Part II

# Estimation Theory

Chapter 9

# Estimation Fundamentals

**In this chapter**

- Define estimators, bias, variance and mean-square error.
- Derive linear and weighted least squares, the covariance of their estimates, and the Gauss–Markov theorem.
- Understand maximum likelihood, Fisher information and the Cramér–Rao bound: what "information" means.
- Derive the minimum mean-square-error and linear minimum mean-square-error estimators, and the orthogonality principle.
- Derive recursive least squares, the Kalman filter without dynamics.
- See that, for linear-Gaussian problems, all of these approaches give the same answer.

Before filtering, which estimates a changing state from a stream of measurements, comes *estimation*: inferring unknown quantities from noisy data. This chapter develops the classical theory. Its punchline is that several quite different philosophies (minimize squared errors; maximize the probability of the data; compute the posterior mean) lead to the same formulas for linear-Gaussian problems, and those formulas are the Kalman update.

## 9.1 Estimators and their errors

### 9.1.1 The setting

An unknown quantity $x \in \mathbb{R}^n$ is to be inferred from data $z \in \mathbb{R}^m$ related to it by a model, typically

$$z = h(x) + n, \qquad n \text{ random, zero mean, covariance } R. \tag{9.1}$$

An *estimator* is a function $\hat{x}(z)$ of the data. Because the data are random, the estimate is random too, and its quality is judged by the statistics of its *error* $e = \hat{x} - x$ over repetitions of the experiment.

**Definition 9.1** (Bias, covariance and mean-square error)**.** The *bias* of an estimator is $b = \mathbb{E}[\hat{x}] - x$; it is *unbiased* if $b = 0$. Its *mean-square error* matrix is $\mathbb{E}[ee^{\mathsf{T}}]$, and its scalar mean-square error is $\mathbb{E}[\|e\|^2] = \operatorname{tr} \mathbb{E}[ee^{\mathsf{T}}]$.

**Proposition 9.2** (Bias–variance decomposition)**.** $\mathbb{E}[ee^{\mathsf{T}}] = \operatorname{Cov}(\hat{x}) + bb^{\mathsf{T}}$, *and hence* $\mathbb{E}\|e\|^2 = \operatorname{tr}\operatorname{Cov}(\hat{x}) + \|b\|^2$.

*Proof.* Write $e = (\hat{x} - \mathbb{E}\hat{x}) + b$ and expand; the cross terms vanish because $\mathbb{E}[\hat{x} - \mathbb{E}\hat{x}] = 0$. ∎

An estimator can be accurate in two ways: by being unbiased, and by having a small covariance. A filter reports a covariance $P$ along with its estimate, and a *consistent* filter is one whose reported $P$ equals its actual mean-square error matrix (Chapter 19).

## 9.2 Linear least squares

### 9.2.1 The estimate

Consider the linear model

$$z = Hx + n, \qquad \mathbb{E}[n] = 0, \quad \operatorname{Cov}(n) = R, \tag{9.2}$$

with $H \in \mathbb{R}^{m \times n}$ of full column rank ($m \geq n$). The *weighted least-squares* (WLS) estimate minimizes the residuals weighted by the inverse noise covariance, so that reliable measurements count more:

$$\hat{x} = \arg\min_{x} (z - Hx)^{\mathsf{T}} R^{-1} (z - Hx) = \left(H^{\mathsf{T}} R^{-1} H\right)^{-1} H^{\mathsf{T}} R^{-1} z. \tag{9.3}$$

The formula comes from setting the gradient $-2H^{\mathsf{T}}R^{-1}(z - Hx)$ to zero (Section 3.5).

**Proposition 9.3** (Statistics of the WLS estimate)**.** *The WLS estimate is unbiased, and its covariance is*

$$\operatorname{Cov}(\hat{x}) = \left(H^{\mathsf{T}} R^{-1} H\right)^{-1}. \tag{9.4}$$

*Proof.* Write $\hat{x} = Lz$ with $L = (H^{\mathsf{T}}R^{-1}H)^{-1}H^{\mathsf{T}}R^{-1}$. Then $LH = I$, so $\hat{x} = x + Ln$ and $\mathbb{E}\hat{x} = x$. By Proposition 5.7, $\operatorname{Cov}(\hat{x}) = LRL^{\mathsf{T}} = (H^{\mathsf{T}}R^{-1}H)^{-1}H^{\mathsf{T}}R^{-1}RR^{-1}H(H^{\mathsf{T}}R^{-1}H)^{-1} = (H^{\mathsf{T}}R^{-1}H)^{-1}$. ∎

The matrix $H^{\mathsf{T}}R^{-1}H$ is the *information* that the measurements carry about $x$, and its inverse is the uncertainty of the estimate. Information from independent measurements adds: with stacked blocks $z_i = H_i x + n_i$ and block-diagonal $R$, $H^{\mathsf{T}}R^{-1}H = \sum_i H_i^{\mathsf{T}} R_i^{-1} H_i$.

**Worked example: fitting a line**

A target moves along a line with unknown initial position $p_0$ and velocity $v$, and its position is measured at times $t_1, \dots, t_m$ with independent noise of standard deviation $\sigma$: $z_i = p_0 + v t_i + n_i$. With $x = (p_0, v)$, $H$ has rows $(1, t_i)$ and $R = \sigma^2 I$, so

$$H^{\mathsf{T}}R^{-1}H = \frac{1}{\sigma^2}\begin{bmatrix} m & \sum t_i \\ \sum t_i & \sum t_i^2 \end{bmatrix}.$$

For $m$ measurements equally spaced over a duration $T$ with times centered on zero, the off-diagonal terms vanish and the velocity variance is $\sigma^2 / \sum t_i^2 \approx 12\sigma^2/(mT^2)$: velocity is determined more precisely when the measurements span a longer time, a first glimpse of how dynamics turn position measurements into velocity information (Figure 9.1).

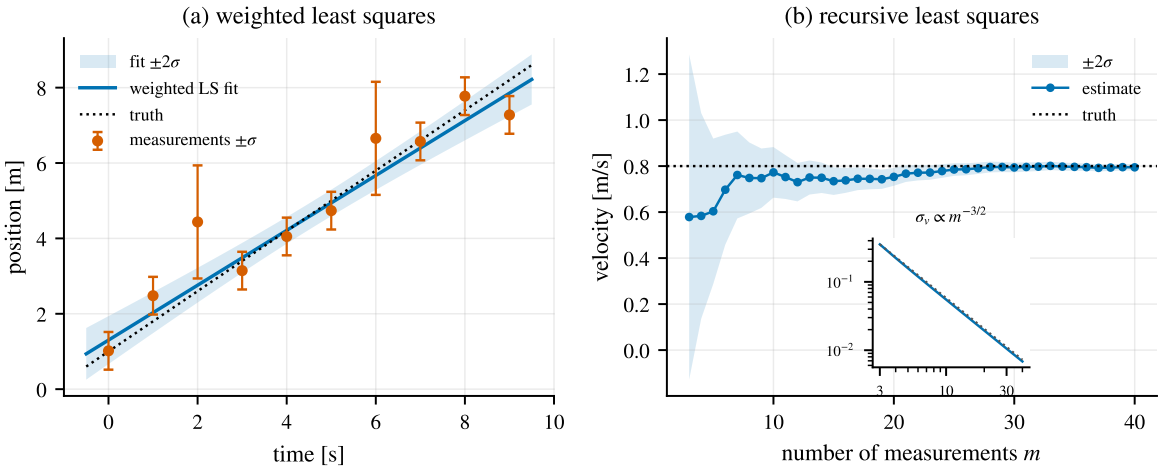



**Figure 9.1:** (a) Weighted least-squares fit of a line to noisy positions, with the $\pm 2\sigma$ band of the fitted line from $(H^{\mathsf{T}}R^{-1}H)^{-1}$. (b) Recursive least squares: the velocity estimate and its $\pm 2\sigma$ bound as measurements arrive one at a time. The bound shrinks like $m^{-3/2}$ because later measurements also lengthen the time baseline.

### 9.2.2 The Gauss–Markov theorem

Why weight by $R^{-1}$? Because it is the best possible linear choice.

> **Theorem 9.4** (Gauss–Markov). *Among all linear unbiased estimators $\tilde{x} = Lz$ of $x$ in the model (9.2), the WLS estimate (9.3) has the smallest covariance:* $\mathrm{Cov}(\tilde{x}) \succeq (H^{\mathsf{T}}R^{-1}H)^{-1}$. *It is the* best linear unbiased estimator *(BLUE).*

*Proof.* Unbiasedness for every $x$ requires $LH = I$. Write $L = L_\star + D$ with $L_\star$ the WLS matrix; then $DH = 0$. The covariance is $LRL^{\mathsf{T}} = L_\star R L_\star^{\mathsf{T}} + DRD^{\mathsf{T}} + L_\star RD^{\mathsf{T}} + DRL_\star^{\mathsf{T}}$, and the cross terms vanish: $L_\star RD^{\mathsf{T}} = (H^{\mathsf{T}}R^{-1}H)^{-1}H^{\mathsf{T}}R^{-1}RD^{\mathsf{T}} = (H^{\mathsf{T}}R^{-1}H)^{-1}(DH)^{\mathsf{T}} = 0$. So $\mathrm{Cov}(\tilde{x}) = \mathrm{Cov}(\hat{x}) + DRD^{\mathsf{T}} \succeq \mathrm{Cov}(\hat{x})$. ∎

The theorem needs no Gaussian assumption, only the first two moments of the noise. If the noise is Gaussian, more is true: WLS is the best of *all* unbiased estimators, linear or not, as the Cramér–Rao bound below shows.

## 9.3 Maximum likelihood

> **Definition 9.5** (Likelihood). For a model with density $p(z \mid x)$, the *likelihood* of a value $x$ given observed data $z$ is $L(x) = p(z \mid x)$, viewed as a function of $x$. The *maximum-likelihood* (ML) estimate maximizes it, equivalently minimizes the negative log-likelihood $-\log p(z \mid x)$.

For Gaussian noise $n \sim \mathcal{N}(0, R)$ in $z = h(x) + n$,

$$-\log p(z \mid x) = \tfrac{1}{2}\big(z - h(x)\big)^{\mathsf{T}} R^{-1} \big(z - h(x)\big) + \text{const}, \tag{9.5}$$

so ML estimation with Gaussian noise *is* weighted least squares, linear or nonlinear. This is the justification of the least-squares costs that pervade estimation, including the reprojection

error of computer vision (Chapter 23). For non-Gaussian noise, ML gives other costs; heavy-tailed noise, for example, leads to the robust costs of Chapter 10.

### 9.3.1 Fisher information and the Cramér–Rao bound

**Definition 9.6** (Fisher information)**.** For a model $p(z \mid x)$, the *Fisher information matrix* is $\mathcal{I}(x) = \mathbb{E}\big[\nabla_x \log p(z \mid x)\, \nabla_x \log p(z \mid x)^{\mathsf{T}}\big] = -\mathbb{E}\big[\nabla_x^2 \log p(z \mid x)\big]$.

The Fisher information measures how sharply the likelihood peaks around the true value: a likelihood that changes rapidly with $x$ pins $x$ down precisely. For the linear-Gaussian model, $\nabla_x^2 \log p = -H^{\mathsf{T}} R^{-1} H$, so $\mathcal{I} = H^{\mathsf{T}} R^{-1} H$: the "information matrix" of WLS is the Fisher information.

**Theorem 9.7** (Cramér–Rao lower bound)**.** *Under mild regularity conditions, every unbiased estimator satisfies* $\operatorname{Cov}(\hat{x}) \succeq \mathcal{I}(x)^{-1}$.

*Proof for a scalar parameter.* Let $s = \frac{\partial}{\partial x} \log p(z \mid x)$ (the *score*). It has zero mean, since $\mathbb{E}[s] = \int \partial_x p \, \mathrm{d}z = \partial_x \int p \, \mathrm{d}z = 0$. Differentiating the unbiasedness condition $\int \hat{x}(z) p(z \mid x) \, \mathrm{d}z = x$ with respect to $x$ gives $\mathbb{E}[\hat{x}\, s] = 1$, hence $\operatorname{Cov}(\hat{x}, s) = 1$. By the Cauchy–Schwarz inequality for covariances, $1 = \operatorname{Cov}(\hat{x}, s)^2 \le \operatorname{Var}(\hat{x}) \operatorname{Var}(s) = \operatorname{Var}(\hat{x})\, \mathcal{I}(x)$. ∎

An unbiased estimator that attains the bound is *efficient*. For the linear-Gaussian model, WLS attains it: $\operatorname{Cov}(\hat{x}) = (H^{\mathsf{T}} R^{-1} H)^{-1} = \mathcal{I}^{-1}$. No unbiased estimator can do better. This gives a precise meaning to the phrase used throughout these notes: *information is inverse covariance*, and independent measurements add their information.

## 9.4 Bayesian estimation

### 9.4.1 Priors and posteriors

In the Bayesian view, the unknown $x$ is itself a random variable with a *prior* density $p(x)$ that summarizes what is known before the data. Bayes' rule gives the *posterior* $p(x \mid z) \propto p(z \mid x) p(x)$, the complete description of what is known afterwards. Point estimates summarize the posterior:

- the *minimum mean-square error* (MMSE) estimate $\hat{x} = \mathbb{E}[x \mid z]$, the posterior mean;
- the *maximum a posteriori* (MAP) estimate, the posterior mode;
- and, ignoring the prior, the ML estimate.

**Theorem 9.8** (The conditional mean is optimal)**.** *Among all estimators $g(z)$, the conditional mean $\mathbb{E}[x \mid z]$ minimizes the Bayesian mean-square error $\mathbb{E}\|x - g(z)\|^2$, and indeed minimizes the error matrix $\mathbb{E}[(x-g)(x-g)^{\mathsf{T}}]$ in the Loewner order.*

*Proof.* Fix $z$ and write $m = \mathbb{E}[x \mid z]$. For any value $g$, $\mathbb{E}\big[(x-g)(x-g)^{\mathsf{T}} \mid z\big] = \operatorname{Cov}(x \mid z) + (m-g)(m-g)^{\mathsf{T}}$ by the bias–variance decomposition applied to the conditional distribution. The second term is PSD and vanishes exactly for $g = m$. Taking the expectation over $z$ preserves the inequality. ∎

For a linear-Gaussian model the posterior is Gaussian (Proposition 5.12), so its mean and mode coincide: MMSE and MAP are the same estimate,

$$\hat{x} = \left(P^{-1} + H^{\mathsf{T}}R^{-1}H\right)^{-1}\left(P^{-1}\mu + H^{\mathsf{T}}R^{-1}z\right), \qquad \operatorname{Cov}(x \mid z) = \left(P^{-1} + H^{\mathsf{T}}R^{-1}H\right)^{-1}, \tag{9.6}$$

for a prior $\mathcal{N}(\mu, P)$. This is weighted least squares with one extra "measurement": the prior acts like a direct observation of $x$ with value $\mu$ and covariance $P$. With an uninformative prior ($P^{-1} \to 0$) it reduces to ML/WLS.

### 9.4.2 Linear MMSE and the orthogonality principle

The conditional mean can be hard to compute when distributions are not Gaussian. The best *linear* (affine) estimator needs only means and covariances.

**Theorem 9.9** (Linear minimum mean-square error estimator)**.** *Let $x$ and $z$ be random vectors with means $\mu_x$, $\mu_z$ and covariances $\Sigma_{xx}$, $\Sigma_{xz}$, $\Sigma_{zz} \succ 0$. Among estimators of the form $\hat{x} = Az + b$, the mean-square error is minimized by*

$$\hat{x} = \mu_x + \Sigma_{xz}\Sigma_{zz}^{-1}(z - \mu_z), \qquad \mathbb{E}[(x - \hat{x})(x - \hat{x})^{\mathsf{T}}] = \Sigma_{xx} - \Sigma_{xz}\Sigma_{zz}^{-1}\Sigma_{zx}. \tag{9.7}$$

*Its error is uncorrelated with the data: $\mathbb{E}\left[(x - \hat{x})(z - \mu_z)^{\mathsf{T}}\right] = 0$ (the* orthogonality principle*).*

*Proof.* The error $e = x - Az - b$ has mean $\mu_x - A\mu_z - b$, which must vanish at the optimum (a non-zero mean only adds $bb^{\mathsf{T}}$), so $b = \mu_x - A\mu_z$. Then $e = (x - \mu_x) - A(z - \mu_z)$ and $\mathbb{E}[ee^{\mathsf{T}}] = \Sigma_{xx} - A\Sigma_{zx} - \Sigma_{xz}A^{\mathsf{T}} + A\Sigma_{zz}A^{\mathsf{T}}$. Completing the square, $\mathbb{E}[ee^{\mathsf{T}}] = (A - A_\star)\Sigma_{zz}(A - A_\star)^{\mathsf{T}} + \Sigma_{xx} - \Sigma_{xz}\Sigma_{zz}^{-1}\Sigma_{zx}$ with $A_\star = \Sigma_{xz}\Sigma_{zz}^{-1}$, which is minimal for $A = A_\star$. At the optimum, $\mathbb{E}[e(z - \mu_z)^{\mathsf{T}}] = \Sigma_{xz} - A_\star\Sigma_{zz} = 0$. ∎

The formulas are identical to Gaussian conditioning (Theorem 5.11): for jointly Gaussian variables the best linear estimator is the best estimator of any kind, and for other distributions it is still the best linear one. The orthogonality principle has a geometric reading: the estimate is the projection of $x$ onto the space of (affine) functions of the data, and the error is orthogonal to that space, exactly as a least-squares residual is orthogonal to the column space (Section 3.5).

**Application to the linear model.** For $z = Hx + n$ with prior mean $\mu$ and covariance $P$ for $x$, and noise uncorrelated with $x$: $\mu_z = H\mu$, $\Sigma_{xz} = PH^{\mathsf{T}}$, $\Sigma_{zz} = HPH^{\mathsf{T}} + R$. Theorem 9.9 gives

$$\hat{x} = \mu + K(z - H\mu), \qquad K = PH^{\mathsf{T}}(HPH^{\mathsf{T}} + R)^{-1}, \qquad \mathbb{E}[ee^{\mathsf{T}}] = P - KHP. \tag{9.8}$$

This is the Kalman update (Chapter 12). By the Woodbury identity (Theorem 3.12) it equals (9.6), but it requires inverting an $m \times m$ matrix instead of an $n \times n$ one.

## 9.5 Recursive least squares

Measurements often arrive one at a time, and recomputing (9.3) from scratch at each arrival would waste work. Since information adds, the batch solution after $k$ measurements satisfies

$$P_k^{-1} = P_{k-1}^{-1} + H_k^\mathsf{T} R_k^{-1} H_k, \qquad P_k^{-1}\hat{x}_k = P_{k-1}^{-1}\hat{x}_{k-1} + H_k^\mathsf{T} R_k^{-1} z_k, \tag{9.9}$$

where $P_k$ is the covariance of $\hat{x}_k$. Rewriting this with the Woodbury identity gives the *recursive least squares* (RLS) update

$$K_k = P_{k-1}H_k^\mathsf{T}\left(H_k P_{k-1} H_k^\mathsf{T} + R_k\right)^{-1}, \qquad \hat{x}_k = \hat{x}_{k-1} + K_k\left(z_k - H_k\hat{x}_{k-1}\right), \qquad P_k = (I - K_k H_k)P_{k-1}. \tag{9.10}$$

Each step corrects the previous estimate by a gain times the *innovation* $z_k - H_k\hat{x}_{k-1}$, the part of the new measurement that the old estimate did not predict. It produces exactly the batch estimate at every step (Figure 9.1b), at a cost that does not grow with the number of measurements. RLS is the Kalman filter for a state that does not change; Chapter 12 adds dynamics.

## 9.6 One answer, many derivations

| Approach | Assumptions | Result for $z = Hx + n$ |
|---|---|---|
| weighted least squares | second moments of the noise | $\hat{x} = (H^\mathsf{T}R^{-1}H)^{-1}H^\mathsf{T}R^{-1}z$ |
| Gauss–Markov (BLUE) | linear, unbiased | same |
| maximum likelihood | Gaussian noise | same |
| MAP / MMSE | Gaussian prior and noise | (9.6): WLS with the prior as a measurement |
| linear MMSE | means and covariances only | (9.8), equal to (9.6) |
| recursive LS | sequential data | same as batch, one measurement at a time |

The Kalman filter inherits all of these interpretations. It is the exact Bayesian posterior for linear-Gaussian systems, the best linear estimator when noises are merely uncorrelated, and a recursive least-squares solver. When models are nonlinear, these interpretations separate, and the resulting approximations (Chapters 10 and 13) differ in which interpretation they try to preserve.

**Key takeaways**

- An estimator's error splits into bias and covariance: $\mathbb{E}[ee^\mathsf{T}] = \mathrm{Cov}(\hat{x}) + bb^\mathsf{T}$.
- Weighted least squares $\hat{x} = (H^\mathsf{T}R^{-1}H)^{-1}H^\mathsf{T}R^{-1}z$ has covariance $(H^\mathsf{T}R^{-1}H)^{-1}$; information adds across independent measurements.
- Gauss–Markov: WLS with $R^{-1}$ weights is the best linear unbiased estimator.
- ML with Gaussian noise is least squares; the Fisher information bounds every unbiased estimator; information is inverse covariance.
- The conditional mean minimizes mean-square error; for Gaussians it equals the MAP estimate.

- The linear MMSE estimator $\mu + \Sigma_{xz}\Sigma_{zz}^{-1}(z - \mu_z)$ needs only second moments; its error is orthogonal to the data.
- Recursive least squares is the Kalman update without dynamics.

## Exercises

**9.1** Show that the sample mean of $m$ independent measurements of a scalar with variances $\sigma_i^2$ is not the BLUE unless all $\sigma_i$ are equal, and find the BLUE.

**9.2** For the line-fitting example with $m = 11$ measurements at $t = -5, \dots, 5$ and $\sigma = 1$, compute the covariance of $(p_0, v)$. How does it change if the times are $0, \dots, 10$? Interpret the off-diagonal term.

**9.3** Prove the matrix version of the Cramér–Rao bound for a linear-Gaussian model by computing $\nabla_x^2 \log p$.

**9.4** Show that (9.6) and (9.8) agree, using Theorem 3.12.

**9.5** Derive the RLS update from the batch information form, and verify numerically that it reproduces the batch estimate at every step.

**9.6** Let $x \sim \mathcal{U}[-1, 1]$ and $z = x^3 + n$ with small Gaussian $n$. Compare the LMMSE estimate with the conditional mean, qualitatively. Why does the LMMSE estimate do poorly?

**9.7** A sensor reports a measurement with a bias $\beta$ that is not modeled. Show that the WLS estimate is biased by $(H^\top R^{-1} H)^{-1} H^\top R^{-1} \beta$, and explain why unmodeled biases are worse than large noise.

## Solutions to the exercises

**9.1** The model is $z_i = x + n_i$, i.e. $H = \mathbf{1}$ (a column of ones) and $R = \operatorname{diag}(\sigma_i^2)$. The WLS estimate is the BLUE (Theorem 9.4):

$$\hat{x} = \left(\mathbf{1}^{\mathsf{T}} R^{-1} \mathbf{1}\right)^{-1} \mathbf{1}^{\mathsf{T}} R^{-1} z = \frac{\sum_i z_i/\sigma_i^2}{\sum_i 1/\sigma_i^2}, \qquad \operatorname{Var}(\hat{x}) = \Big(\sum_i \frac{1}{\sigma_i^2}\Big)^{-1},$$

the inverse-variance weighted mean. The sample mean $\bar{z} = \frac{1}{m}\sum_i z_i$ is linear and unbiased with variance $\frac{1}{m^2}\sum_i \sigma_i^2$, and by the Cauchy–Schwarz inequality $\big(\sum_i \sigma_i^2\big)\big(\sum_i \sigma_i^{-2}\big) \geq m^2$, with equality only when all $\sigma_i$ are equal. So $\operatorname{Var}(\bar{z}) \geq \operatorname{Var}(\hat{x})$, strictly unless the variances are equal: then (and only then) the two estimators coincide. One poor sensor can ruin a plain average; in the weighted one it simply counts for little.

**9.2** With $z_i = p_0 + v t_i + n_i$, $H$ has rows $(1, t_i)$ and $\operatorname{Cov}(\hat{p}_0, \hat{v}) = (H^{\mathsf{T}}H)^{-1}$. For $t = -5, \dots, 5$, $\sum t_i = 0$ and $\sum t_i^2 = 110$, so

$$(H^{\mathsf{T}}H)^{-1} = \begin{bmatrix} 11 & 0 \\ 0 & 110 \end{bmatrix}^{-1} = \operatorname{diag}\big(0.0909,\ 0.00909\big)\,:$$

$\sigma_{p_0} = 0.30$, $\sigma_v = 0.095$, uncorrelated. For $t = 0, \dots, 10$, $\sum t_i = 55$ and $\sum t_i^2 = 385$, and

$$(H^{\mathsf{T}}H)^{-1} = \frac{1}{1210}\begin{bmatrix} 385 & -55 \\ -55 & 11 \end{bmatrix} = \begin{bmatrix} 0.318 & -0.0455 \\ -0.0455 & 0.00909 \end{bmatrix}.$$

The velocity variance is unchanged (it depends only on the spread of the times), but $p_0$ is now the value at the *end* of the data, an extrapolation, with variance 3.5 times larger and correlation $-0.85$ with $v$: a line that is too steep must start too low to pass through the data. The intercept is best determined at the centroid of the times, where the correlation vanishes.

**9.3** For $z = Hx + n$ with $n \sim \mathcal{N}(0, R)$, $\log p(z \mid x) = -\frac{1}{2}(z - Hx)^{\mathsf{T}} R^{-1}(z - Hx) + \text{const}$. Its gradient is $\nabla_x \log p = H^{\mathsf{T}}R^{-1}(z - Hx)$ and its Hessian $\nabla_x^2 \log p = -H^{\mathsf{T}}R^{-1}H$, which does not depend on $z$, so $\mathcal{I}(x) = -\mathbb{E}[\nabla_x^2 \log p] = H^{\mathsf{T}}R^{-1}H$. (The outer-product definition agrees: $\mathbb{E}[H^{\mathsf{T}}R^{-1}nn^{\mathsf{T}}R^{-1}H] = H^{\mathsf{T}}R^{-1}H$.) The matrix bound is proved like the scalar one: for an unbiased $\hat{x}$ and the score $s = \nabla_x \log p$, differentiating $\mathbb{E}[\hat{x}] = x$ gives $\operatorname{Cov}(\hat{x}, s) = I$, and the covariance matrix of $(\hat{x}, s)$, $\begin{bmatrix} \operatorname{Cov}(\hat{x}) & I \\ I & \mathcal{I} \end{bmatrix} \geq 0$, has the PSD Schur complement $\operatorname{Cov}(\hat{x}) - \mathcal{I}^{-1} \geq 0$ (Exercise 3.3's argument). WLS has covariance $(H^{\mathsf{T}}R^{-1}H)^{-1} = \mathcal{I}^{-1}$ and attains the bound.

**9.4** Apply Theorem 3.12 (as in Exercise 3.6) to the covariance of (9.6): $(P^{-1} + H^{\mathsf{T}}R^{-1}H)^{-1} = P - PH^{\mathsf{T}}(HPH^{\mathsf{T}} + R)^{-1}HP = P - KHP$ with $K = PH^{\mathsf{T}}(HPH^{\mathsf{T}} + R)^{-1}$, the covariance of (9.8). For the mean, multiply out with this expression:

$$(P - KHP)\big(P^{-1}\mu + H^{\mathsf{T}}R^{-1}z\big) = \mu - KH\mu + \big(PH^{\mathsf{T}} - KHPH^{\mathsf{T}}\big)R^{-1}z.$$

Since $K(HPH^{\mathsf{T}} + R) = PH^{\mathsf{T}}$, we have $PH^{\mathsf{T}} - KHPH^{\mathsf{T}} = KR$, so the last term is $Kz$, and

the mean is $\mu + K(z - H\mu)$: the two forms agree.

**9.5** With prior $(\hat{x}_0, P_0)$, the batch estimate after $k$ measurements has information $P_k^{-1} = P_0^{-1} + \sum_{i \le k} H_i^\mathsf{T} R_i^{-1} H_i$ and information vector $P_k^{-1}\hat{x}_k = P_0^{-1}\hat{x}_0 + \sum_{i \le k} H_i^\mathsf{T} R_i^{-1} z_i$. Subtracting the expressions for $k-1$ gives the recursion in information form stated in the chapter. Solving it for $\hat{x}_k$: $\hat{x}_k = P_k\left(P_{k-1}^{-1}\hat{x}_{k-1} + H_k^\mathsf{T} R_k^{-1} z_k\right)$, and with $P_{k-1}^{-1} = P_k^{-1} - H_k^\mathsf{T} R_k^{-1} H_k$ this is $\hat{x}_k = \hat{x}_{k-1} + P_k H_k^\mathsf{T} R_k^{-1}(z_k - H_k\hat{x}_{k-1})$. Finally $P_k H_k^\mathsf{T} R_k^{-1} = K_k$ (the push-through identity of Exercise 5.6) and $P_k = (I - K_k H_k)P_{k-1}$ by Woodbury. A numerical check with three unknowns, thirty scalar measurements of random variances and a weak prior: the RLS estimate and covariance agree with the batch solution after every measurement to $3 \times 10^{-12}$.

**9.6** The LMMSE estimate uses only second moments: with $\mathbb{E}[x] = \mathbb{E}[z] = 0$, $\Sigma_{xz} = \mathbb{E}[x^4] = \frac{1}{5}$ and $\Sigma_{zz} = \mathbb{E}[x^6] + \sigma^2 = \frac{1}{7} + \sigma^2$,

$$\hat{x}_{\text{LMMSE}} = \frac{1/5}{1/7 + \sigma^2}\, z \approx 1.4\, z,$$

a straight line through a cube-root-shaped relation. The conditional mean $\mathbb{E}[x \mid z]$ follows the cube root, $\approx z^{1/3}$ wherever the noise is small compared with $z$. At $x = 0.5$ ($z = 0.125$) the LMMSE estimate is 0.17, at $x = 0.9$ ($z = 0.73$) it is 1.02, outside the support of $x$; the conditional mean gives 0.50 and 0.90. Overall, for $\sigma = 0.01$, the LMMSE root-mean-square error is 0.23 against 0.075 for the conditional mean (computed numerically). LMMSE does poorly because the dependence of $z$ on $x$ is strongly nonlinear: the best straight line fits neither small nor large values. This is the limitation the EKF inherits, mitigated by linearizing locally around the current estimate rather than globally.

**9.7** With $z = Hx + n + \beta$, the estimate $\hat{x} = Lz$ with $L = (H^\mathsf{T} R^{-1} H)^{-1} H^\mathsf{T} R^{-1}$ satisfies $LH = I$, so

$$\hat{x} - x = Ln + L\beta, \qquad \mathbb{E}[\hat{x}] - x = (H^\mathsf{T} R^{-1} H)^{-1} H^\mathsf{T} R^{-1}\beta.$$

The noise term has zero mean and covariance $(H^\mathsf{T} R^{-1} H)^{-1}$, which shrinks as measurements accumulate ($\propto 1/m$ for $m$ comparable measurements). The bias term does not shrink: a constant offset in every measurement is averaged, not cancelled. The estimate therefore converges, with ever-smaller reported covariance, to the wrong value, and the filter becomes overconfident. Large noise is honest: it is in $R$, so it makes the covariance large. An unmodeled bias is invisible to the covariance and, if $\beta$ lies in the range of $H$, invisible in the residuals too, because it is indistinguishable from a different $x$. The cure is to model the bias as a state (Chapter 6), which is exactly why IMU biases are part of the filter state.

Chapter 10

# Nonlinear Least Squares and Optimization

**In this chapter**

- Formulate estimation problems with nonlinear models as nonlinear least-squares problems.
- Derive Newton, Gauss–Newton and Levenberg–Marquardt iterations, and understand when each converges.
- Optimize over manifolds such as SO(3) by iterating in the tangent space.
- Make least squares robust to outliers with M-estimators and iteratively reweighted least squares.
- Exploit the structure of problems with poses and landmarks: the Schur complement and marginalization.
- See that an extended Kalman update is one Gauss–Newton step, the bridge between filtering and optimization.

Most measurement models in VIO are nonlinear: projections divide by depth, rotations enter through trigonometric functions. Maximum likelihood with Gaussian noise then becomes a *nonlinear* least-squares problem with no closed-form solution. This chapter develops the iterative methods that solve such problems. They are used directly in this project for triangulation, and they explain what the extended Kalman filter and the MSCKF are doing.

## 10.1 The problem

Given residual functions $r_i(x)$ (measurement minus prediction) with noise covariances $R_i$, the maximum-likelihood estimate minimizes

$$F(x) = \frac{1}{2}\sum_i r_i(x)^\mathsf{T} R_i^{-1} r_i(x) = \frac{1}{2}\, r(x)^\mathsf{T} W\, r(x), \tag{10.1}$$

where $r$ stacks the residuals and $W = \operatorname{blkdiag}(R_i^{-1})$. Examples in these notes:

- *Triangulation*: find a 3D point minimizing the reprojection errors in several images (Chapter 23).
- *Relative pose*: find the motion between two images that best explains point correspondences.
- *Bundle adjustment*: find all camera poses and all points at once.

- *Sliding-window VIO*: find a window of states minimizing visual and inertial residuals together.

Writing $W = L^\mathsf{T} L$ (for instance $L$ the inverse of a Cholesky factor of the noise covariance) and replacing $r$ by $Lr$ *whitens* the residuals, so that $W = I$. We do this silently when convenient.

## 10.2 Descent methods

The gradient and Hessian of $F$ follow from the chain rule. With $J = \partial r / \partial x$,

$$\nabla F = J^\mathsf{T} W r, \qquad \nabla^2 F = J^\mathsf{T} W J + \sum_k (Wr)_k \, \nabla^2 r_k. \tag{10.2}$$

**Gradient descent.** Step downhill, $x \leftarrow x - \alpha \nabla F$, with a step length $\alpha$ chosen by a line search. It always makes progress for small enough $\alpha$, but it ignores curvature and zig-zags slowly along narrow valleys.

**Newton's method.** Minimize the quadratic Taylor model $F(x + \delta) \approx F + \nabla F^\mathsf{T} \delta + \frac{1}{2} \delta^\mathsf{T} \nabla^2 F \, \delta$ exactly:

$$\nabla^2 F \, \delta = -\nabla F. \tag{10.3}$$

Near a minimum with positive-definite Hessian, Newton's method converges *quadratically*: the number of correct digits roughly doubles each iteration. But it needs second derivatives of every residual, and far from the minimum the Hessian may not be positive definite, in which case the step can go uphill.

## 10.3 Gauss–Newton

Least-squares problems allow a better compromise. Linearize the *residuals* rather than the cost: $r(x + \delta) \approx r + J\delta$. The cost then becomes a linear least-squares problem in $\delta$,

$$\min_\delta \ \tfrac{1}{2} \| r + J\delta \|_W^2 \quad \Longrightarrow \quad \left( J^\mathsf{T} W J \right) \delta = -J^\mathsf{T} W r, \tag{10.4}$$

the *Gauss–Newton* step. Comparing with (10.2), Gauss–Newton is Newton's method with the second term of the Hessian dropped. That term is small when the residuals are small at the solution, or when the residuals are nearly linear, which is the common case for well-modeled sensors. Then Gauss–Newton converges almost as fast as Newton, without second derivatives. The approximate Hessian $J^\mathsf{T} W J$ is always positive semi-definite, so the step is always a descent direction (if $J$ has full column rank).

The linear system is the normal equation of a linear least-squares problem, so all the numerical advice of Section 3.5 applies: for small, well-conditioned problems Cholesky of $J^\mathsf{T} W J$ is fine; for ill-conditioned ones, QR of the whitened Jacobian is safer.

**Algorithm 1** Gauss–Newton

**Input:** initial guess $x$, residual function $r(x)$ and its Jacobian $J(x)$

1: **repeat**
2: evaluate $r$ and $J$ at $x$
3: solve $(J^\mathsf{T} W J)\,\delta = -J^\mathsf{T} W r$ ▷ Cholesky of $J^\mathsf{T} W J$, or QR of the whitened $J$
4: $x \leftarrow x + \delta$
5: **until** $\|\delta\|$ or the decrease of $F$ is below a tolerance

**When Gauss–Newton fails.** With a poor initial guess, large residuals or strong nonlinearity, the linear model can be a bad approximation, and a full step can increase the cost. If $J^\mathsf{T} W J$ is singular, some direction is not determined by the data (a *gauge freedom* or an unobservable direction), and the step is undefined.

## 10.4 Levenberg–Marquardt

The *Levenberg–Marquardt* (LM) method damps the Gauss–Newton step:

$$\left(J^\mathsf{T} W J + \lambda D\right)\delta = -J^\mathsf{T} W r, \qquad \lambda \geq 0, \tag{10.5}$$

with $D = I$ or $D = \operatorname{diag}(J^\mathsf{T} W J)$. For $\lambda \to 0$ it is Gauss–Newton; for large $\lambda$ the step becomes a short gradient-descent step. The damping is adapted to how well the linear model predicted the actual change of cost. With the *gain ratio*

$$\rho = \frac{F(x) - F(x+\delta)}{F(x) - \frac{1}{2}\|r + J\delta\|_W^2}, \tag{10.6}$$

a step with $\rho$ close to one is accepted and $\lambda$ decreased (trust the model more), while a step with small or negative $\rho$ is rejected and $\lambda$ increased. LM is equivalent to a *trust-region* method that restricts the step to a region where the linearization is trusted. It is the default solver of most computer-vision and robotics libraries.

## 10.5 Uncertainty of the solution

At the minimum $\hat{x}$, the cost is approximately quadratic, $F(\hat{x}+\delta) \approx F(\hat{x}) + \frac{1}{2}\delta^\mathsf{T}(J^\mathsf{T} W J)\delta$, and with $W$ equal to the inverse noise covariance the estimate has approximately the WLS covariance of the linearized problem (Proposition 9.3):

$$\operatorname{Cov}(\hat{x}) \approx \left(J^\mathsf{T} W J\right)^{-1}\Big|_{\hat{x}}. \tag{10.7}$$

This is the *Laplace approximation*: the posterior is replaced by a Gaussian fitted to its peak. It is accurate when the problem is nearly linear over the region of uncertainty. A triangulated point, for example, gets a covariance from the Jacobians of its reprojection errors.

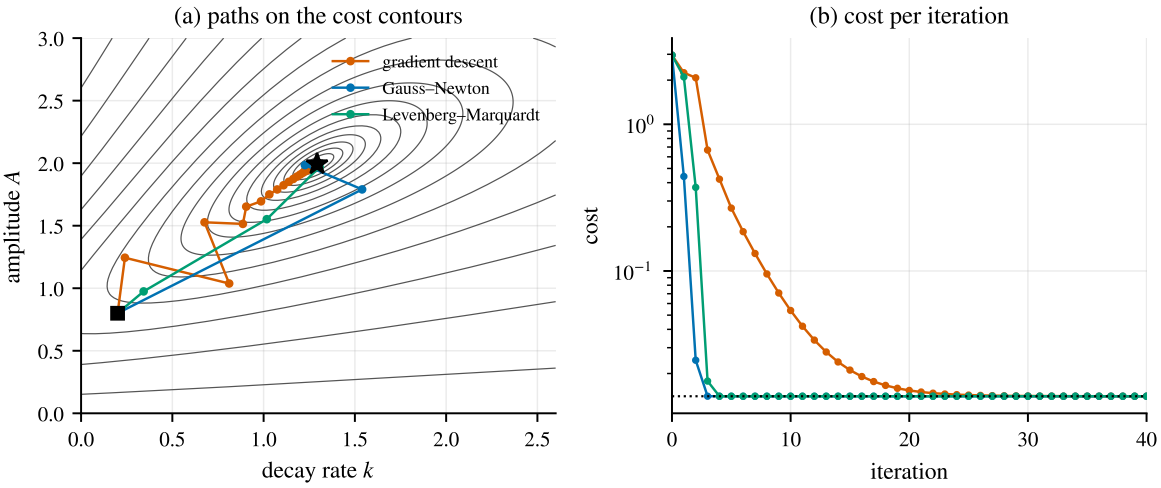



**Figure 10.1:** Fitting the decay rate and amplitude of an exponential to noisy data. (a) Paths of gradient descent, Gauss–Newton and Levenberg–Marquardt on the contours of the cost, from the same starting point. (b) Cost versus iteration. Gradient descent crawls along the curved valley; Gauss–Newton and LM reach the minimum in a handful of iterations.

## 10.6 Optimization on manifolds

When the unknown includes rotations, $x + \delta$ is replaced by the retraction $x \boxplus \delta$ of Chapter 8. Linearize the residual in the tangent space, $r(x \boxplus \delta) \approx r(x) + J\delta$ with $J$ the manifold Jacobian (Definition 8.7), solve the same Gauss–Newton equation for $\delta$, and update $x \leftarrow x \boxplus \delta$. The step is computed in a flat space and applied on the curved one, so the iterate never leaves the manifold and no constraint ever needs enforcing. Covariances are then expressed in the tangent space at the solution, exactly as in a filter.

**Example 10.1** (Rotation averaging as Gauss–Newton). Average rotations $R_1, \dots, R_N$ (Chapter 8) by minimizing $\frac{1}{2}\sum_i \|r_i\|^2$ with $r_i(\bar{R}) = \mathrm{Log}(\bar{R}^\mathsf{T} R_i)$. Perturbing $\bar{R} \boxplus \delta = \bar{R}\,\mathrm{Exp}(\delta)$ gives $r_i = \mathrm{Log}(\mathrm{Exp}(-\delta)\bar{R}^\mathsf{T} R_i) \approx r_i(\bar{R}) - J_l^{-1}(r_i)\,\delta$ (Equation (8.15)). For small residuals $J_l^{-1} \approx I$, so $J_i \approx -I$, and the Gauss–Newton step is $\delta = \frac{1}{N}\sum_i r_i$: exactly the averaging iteration of Chapter 8.

## 10.7 Robust estimation

### 10.7.1 Outliers break least squares

A squared cost gives enormous influence to large residuals: a single wrong measurement, far from the others, can drag a least-squares estimate arbitrarily far. Real data contain such *outliers*: misassociated features, reflections, moving objects. Two defenses exist: detect and remove them (gating, RANSAC), or reduce their influence with a robust cost.

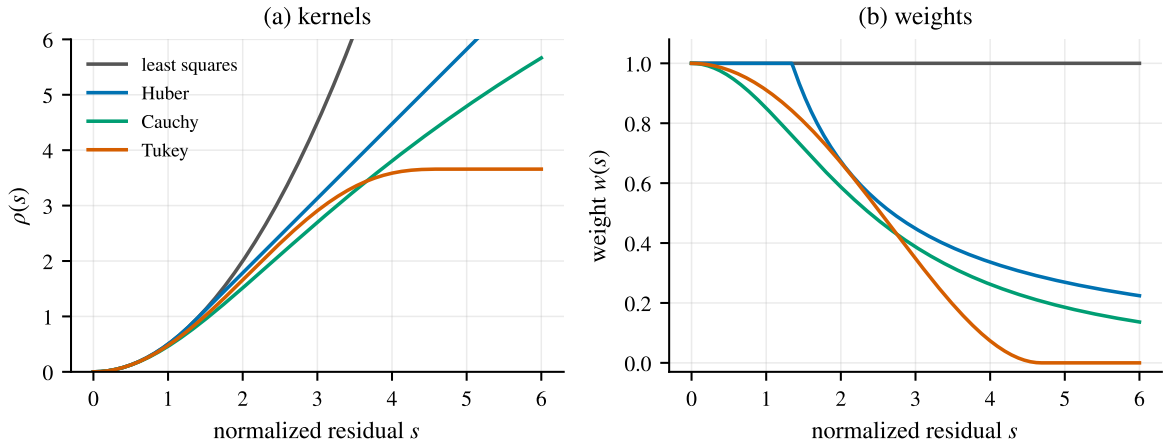



**Figure 10.2:** Robust kernels (left) and their weights (right) as functions of the normalized residual, for $c = 1.345$ (Huber), 2.385 (Cauchy) and 4.685 (Tukey). Huber grows linearly instead of quadratically for large residuals; Cauchy grows logarithmically; Tukey ignores residuals beyond $c$ entirely.

### 10.7.2 M-estimators

An *M-estimator* replaces the quadratic by a function $\rho$ of the whitened residual norm $s_i = \|r_i\|_{R_i^{-1}}$:

$$\min_x \sum_i \rho(s_i). \tag{10.8}$$

| Kernel | $\rho(s)$ | weight $w(s) = \rho'(s)/s$ |
|---|---|---|
| least squares | $\frac{1}{2}s^2$ | 1 |
| Huber | $\frac{1}{2}s^2$ for $s \le c$; $c(s - \frac{c}{2})$ otherwise | 1 for $s \le c$; $c/s$ otherwise |
| Cauchy | $\frac{c^2}{2}\log(1 + s^2/c^2)$ | $1/(1 + s^2/c^2)$ |
| Tukey | $\frac{c^2}{6}\left(1 - (1 - s^2/c^2)^3\right)$ for $s \le c$; $c^2/6$ otherwise | $(1 - s^2/c^2)^2$ for $s \le c$; 0 otherwise |

The derivative $\psi = \rho'$ (the *influence function*) measures how hard a residual pulls on the estimate: unbounded and linear for least squares, bounded for Huber, decreasing to zero for Cauchy and Tukey (Figure 10.2). The constants $c$ trade efficiency on clean Gaussian data against robustness; the values in the figure keep 95% of the efficiency of least squares on Gaussian noise.

### 10.7.3 Iteratively reweighted least squares

Setting the gradient of $\sum_i \rho(s_i)$ to zero gives $\sum_i w(s_i) J_i^\mathsf{T} R_i^{-1} r_i = 0$ with $w(s) = \rho'(s)/s$: the normal equations of a *weighted* least-squares problem whose weights depend on the residuals. *Iteratively reweighted least squares* (IRLS) alternates: compute the weights from the current residuals, take a Gauss–Newton step with those weights, repeat. Outliers receive small weights and stop dominating. Robust kernels need a reasonable initial guess, because with large initial errors every residual looks like an outlier; RANSAC (Chapter 23) provides such guesses.

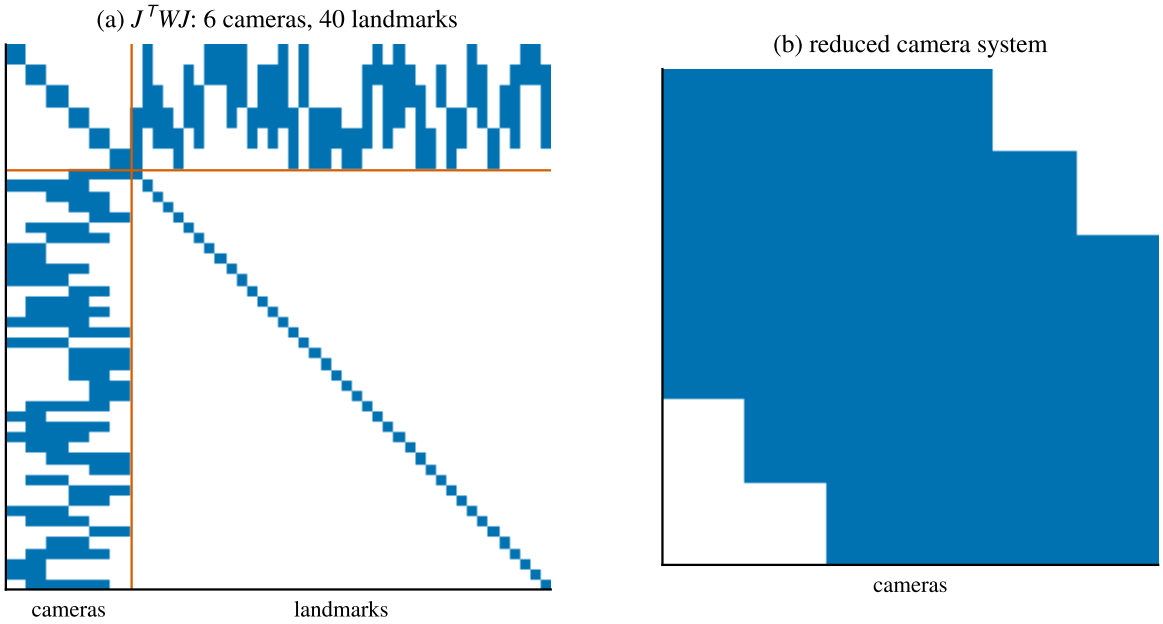



**Figure 10.3:** Sparsity of the normal-equation matrix $J^\mathsf{T} W J$ for a toy bundle adjustment with 6 cameras and 40 landmarks (left), and of the reduced camera system after eliminating the landmarks (right). The landmark block is block-diagonal and cheap to eliminate; the reduced system is small but dense.

Gating, used in filters, is the hard-decision version of the same idea: a measurement whose normalized residual exceeds a threshold gets weight zero, all others weight one, a "truncated quadratic" kernel.

## 10.8 Structure: poses, landmarks and the Schur complement

Many estimation problems have two kinds of unknowns. In bundle adjustment, the cameras $c$ and the landmarks $l$; in VIO smoothing, the states in a window and the features. Each residual involves one camera and one landmark, so the normal equations have a special block structure:

$$\begin{bmatrix} A & B \\ B^\mathsf{T} & C \end{bmatrix} \begin{bmatrix} \delta c \\ \delta l \end{bmatrix} = \begin{bmatrix} g_c \\ g_l \end{bmatrix}, \tag{10.9}$$

where $C$, the landmark block of $J^\mathsf{T} W J$, is block diagonal with one $3 \times 3$ block per landmark (no residual involves two landmarks). Inverting $C$ is therefore cheap. Eliminating the landmarks with the Schur complement (Section 3.8),

$$\left(A - BC^{-1}B^\mathsf{T}\right) \delta c = g_c - BC^{-1} g_l, \qquad \delta l = C^{-1}(g_l - B^\mathsf{T} \delta c), \tag{10.10}$$

leaves a *reduced camera system* whose size depends only on the number of cameras, often a hundred times smaller than the full problem.

The same operation has a probabilistic meaning. $J^\mathsf{T} W J$ is the information matrix of the linearized problem, and the Schur complement is *marginalization in information form* (Theorem 5.11): the reduced system is the information that the measurements carry about the

cameras alone, after the landmarks have been integrated out. Sliding-window estimators use exactly this to discard old states, keeping their information as a Gaussian prior on the remaining ones; the price is *fill-in*, since the reduced matrix is dense (Figure 10.3). The MSCKF performs the same elimination of each landmark, by a different algebraic route: the left-nullspace projection (Chapter 26).

## 10.9 Filtering as optimization

**Proposition 10.2** (The EKF update is one Gauss–Newton step)**.** *Consider the MAP cost of one measurement $z = h(x) + n$, $n \sim \mathcal{N}(0, R)$, with prior $\mathcal{N}(\mu, P)$:*

$$F(x) = \tfrac{1}{2}\|x - \mu\|^2_{P^{-1}} + \tfrac{1}{2}\|z - h(x)\|^2_{R^{-1}}.$$

*One Gauss–Newton step from $x = \mu$ gives $x^+ = \mu + K(z - h(\mu))$ with $K = PH^\mathsf{T}(HPH^\mathsf{T} + R)^{-1}$ and $H = \partial h/\partial x|_\mu$: the extended Kalman update (Chapter 13).*

*Proof.* The stacked residual is $r(x) = \big(L_P(x - \mu),\ L_R(h(x) - z)\big)$ with $L_P^\mathsf{T} L_P = P^{-1}$ and $L_R^\mathsf{T} L_R = R^{-1}$. At $x = \mu$, $r = (0,\ L_R(h(\mu) - z))$ and $J = (L_P,\ L_R H)$, so the Gauss–Newton equation (10.4) reads $(P^{-1} + H^\mathsf{T} R^{-1} H)\delta = H^\mathsf{T} R^{-1}(z - h(\mu))$. By the Woodbury identity, $(P^{-1} + H^\mathsf{T} R^{-1} H)^{-1} H^\mathsf{T} R^{-1} = PH^\mathsf{T}(HPH^\mathsf{T} + R)^{-1} = K$. ∎

Iterating the Gauss–Newton step, re-linearizing $h$ at each new estimate while keeping the prior term, gives the *iterated* EKF, which handles strong measurement nonlinearities better. Sliding-window smoothers go further and re-linearize past measurements as well. The MSCKF update is one Gauss–Newton step of a sliding-window problem whose landmarks have been eliminated (Chapter 26): filtering and optimization are two ends of one spectrum, distinguished by how often they re-linearize and which variables they keep.

**Key takeaways**

- ML with Gaussian noise means minimizing $\frac{1}{2} r^\mathsf{T} W r$; the gradient is $J^\mathsf{T} W r$ and $J^\mathsf{T} W J$ approximates the Hessian.
- Gauss–Newton solves $(J^\mathsf{T} W J)\delta = -J^\mathsf{T} W r$ repeatedly; it converges fast when residuals are small or nearly linear.
- Levenberg–Marquardt damps the step adaptively and is robust to poor initial guesses.
- On manifolds, compute the step in the tangent space and apply it with $\boxplus$.
- $(J^\mathsf{T} W J)^{-1}$ at the optimum approximates the covariance of the estimate.
- Robust kernels bound the influence of outliers; IRLS solves them; gating is the hard version.
- Eliminating landmarks with the Schur complement is marginalization in information form.
- An EKF update is one Gauss–Newton step on the MAP cost; iterating gives the iterated EKF.

## Exercises

**10.1** Derive the gradient and Hessian (10.2) of the least-squares cost.

**10.2** Implement Gauss–Newton and LM for fitting $y = ae^{-bt}$ to noisy data and reproduce Figure 10.1. Start from a poor initial guess and compare robustness.

**10.3** Show that for a zero-residual problem Gauss–Newton converges quadratically near the solution.

**10.4** Fit a line to data containing 20% gross outliers with least squares, Huber IRLS and Cauchy IRLS. Compare the results.

**10.5** Implement the Schur-complement solution (10.10) for a random sparse problem and verify that it matches the full solve.

**10.6** Prove that the reduced camera system equals the inverse of the camera block of $(J^\mathsf{T} W J)^{-1}$, and interpret this as marginalization.

**10.7** Write out one iteration of the iterated EKF and show that it reduces to the standard EKF update after the first iteration.

## Solutions to the exercises

**10.1** With $F = \frac{1}{2} r^{\mathsf{T}} W r$ and $W$ symmetric, a small change $\mathrm{d}x$ changes the residual by $\mathrm{d}r = J\,\mathrm{d}x$ and the cost by $\mathrm{d}F = r^{\mathsf{T}} W\,\mathrm{d}r = (J^{\mathsf{T}} W r)^{\mathsf{T}} \mathrm{d}x$, so $\nabla F = J^{\mathsf{T}} W r = \sum_k (Wr)_k \nabla r_k$, a combination of the residual gradients. Differentiating this sum by the product rule,

$$\mathrm{d}(\nabla F) = \sum_k \nabla r_k\,(W\,\mathrm{d}r)_k + \sum_k (Wr)_k\,\nabla^2 r_k\,\mathrm{d}x = \Big(J^{\mathsf{T}} W J + \sum_k (Wr)_k \nabla^2 r_k\Big)\mathrm{d}x,$$

which is (10.2). The first term needs only first derivatives; the second is weighted by the residuals, which is why Gauss–Newton may drop it when the residuals are small.

**10.2** The implementation follows Algorithm 1 with $r(a,b) = ae^{-bt} - y$ and Jacobian columns $e^{-bt}$ and $-ate^{-bt}$; LM adds $\lambda\,\mathrm{diag}(J^{\mathsf{T}}J)$ and adapts $\lambda$ (divide by 10 after a successful step, multiply by 10 after a failed one). On the data of Figure 10.1 (25 samples on $[0, 1.5]$ s, $a = 2$, $b = 1.3$, noise 0.04) both reach $(\hat{a}, \hat{b}) = (1.993, 1.293)$ from the figure's start. Starting instead from each point of a grid of 16×21 initial guesses with $a_0 \in [-1.75, 5.75]$ and $b_0 \in [-2, 8]$, LM converged from all 336 starts and Gauss–Newton from 237. Typical failures: from $(a_0, b_0) = (0.5, 6)$ the first Gauss–Newton step overshoots to a huge decay rate, after which $e^{-bt} \approx 0$ for all $t > 0$, $J$ becomes rank deficient and the iteration never recovers; from $(1, 4)$ it overflows. LM rejects such steps and shortens them until the cost decreases, which is what makes it the default choice when the initial guess is poor.

**10.3** Let $x^\star$ be a solution with $r(x^\star) = 0$ and $J^\star = J(x^\star)$ of full column rank, and let $e = x - x^\star$. Taylor expansion gives $r(x) = J^\star e + O(\|e\|^2)$ and $J(x) = J^\star + O(\|e\|)$, hence $r(x) = J(x)\,e + O(\|e\|^2)$. The Gauss–Newton step from $x$ is $\delta = -(J^{\mathsf{T}}WJ)^{-1}J^{\mathsf{T}}Wr(x) = -e + O(\|e\|^2)$, so the new error is $e + \delta = O(\|e\|^2)$: quadratic convergence. With a non-zero residual $r(x^\star)$ the omitted Hessian term $\sum_k (Wr)_k \nabla^2 r_k$ is of the size of the residual, and the convergence is only linear, with a rate that grows with the residual. Fitting the exponential to noise-free data from $(2.3, 1.0)$ gives errors $8 \times 10^{-2}$, $3 \times 10^{-3}$, $3 \times 10^{-6}$, $4 \times 10^{-12}$: the number of correct digits doubles each time.

**10.4** With 100 points on $y = 0.5x + 1$ (noise 0.2) of which 20 are replaced by uniform outliers, and IRLS using the normalized residuals $s_i = |r_i|/\hat{\sigma}$ with the robust scale $\hat{\sigma} = 1.4826\,\mathrm{median}|r_i - \mathrm{median}(r)|$:

| method | slope | intercept |
|---|---|---|
| least squares | 0.394 | 1.92 |
| Huber IRLS ($c = 1.345$) | 0.489 | 1.04 |
| Cauchy IRLS ($c = 2.385$) | 0.495 | 0.98 |
| least squares on the inliers only | 0.496 | 0.98 |

Least squares is dragged far off by the outliers. Huber bounds their influence (each outlier still pulls with constant force $c$) and Cauchy nearly ignores them, matching the fit that knows which points are inliers. The robust scale estimate matters: with the scale computed by a plain standard deviation, which the outliers inflate, both kernels stop at slopes near 0.44 and intercepts near 1.45, because the outliers no longer look large enough to be down-weighted.

**10.5** Build a random problem with the bundle-adjustment structure: 8 "cameras" with 6 parameters and 60 "landmarks" with 3, each landmark observed by 3 random cameras, each observation contributing a $2\times6$ camera block and a $2\times3$ landmark block to $J$. Then the landmark block $C$ of $M = J^\mathsf{T}J$ is block diagonal, so $C^{-1}$ is computed block by block. Solving the reduced system $(A - BC^{-1}B^\mathsf{T})\,\delta c = g_c - BC^{-1}g_l$, then back-substituting $\delta l = C^{-1}(g_l - B^\mathsf{T}\delta c)$, matches the direct solve of the full $228 \times 228$ system to $10^{-13}$. The reduced system is only $48 \times 48$; for real problems with thousands of landmarks the saving is enormous.

**10.6** Apply Proposition 3.11 to $M = \begin{bmatrix} A & B \\ B^\mathsf{T} & C \end{bmatrix}$, eliminating the landmark block $C$ (the proposition with the roles of the blocks exchanged, as in Exercise 5.4): the camera block of $M^{-1}$ is $(M/C)^{-1} = (A - BC^{-1}B^\mathsf{T})^{-1}$. Hence the reduced camera matrix is the inverse of the camera block of $M^{-1}$ (numerically, to $5 \times 10^{-14}$ in the example above). Interpretation: at the optimum $M = J^\mathsf{T}WJ$ is the information matrix of the estimate and $M^{-1}$ its covariance. The camera block of the covariance is the marginal covariance of the cameras, and its inverse is their marginal information. The reduced camera system is therefore exactly the information about the cameras after the landmarks have been marginalized out, the same operation that a sliding-window smoother performs when it marginalizes old states.

**10.7** Iteration $i$ linearizes $h$ at the current iterate $x_i$ (with $x_0 = \mu$), $H_i = \partial h/\partial x|_{x_i}$, and takes a Gauss–Newton step on the MAP cost from $x_i$. Its normal equations are

$$\big(P^{-1} + H_i^\mathsf{T}R^{-1}H_i\big)\,\delta = -P^{-1}(x_i - \mu) + H_i^\mathsf{T}R^{-1}\big(z - h(x_i)\big).$$

Adding $(P^{-1} + H_i^\mathsf{T}R^{-1}H_i)(x_i - \mu)$ to both sides gives $(P^{-1} + H_i^\mathsf{T}R^{-1}H_i)(x_{i+1} - \mu) = H_i^\mathsf{T}R^{-1}\big(z - h(x_i) - H_i(\mu - x_i)\big)$, i.e.

$$x_{i+1} = \mu + K_i\big(z - h(x_i) - H_i(\mu - x_i)\big), \qquad K_i = PH_i^\mathsf{T}\big(H_iPH_i^\mathsf{T} + R\big)^{-1}.$$

For $i = 0$, $x_0 = \mu$ and the bracket reduces to $z - h(\mu)$: the first iteration is exactly the EKF update of Proposition 10.2. Later iterations re-linearize the measurement at the improved estimate; the term $-H_i(\mu - x_i)$ keeps the prior anchored at $\mu$, so the iteration minimizes the full MAP cost rather than repeatedly applying the measurement. After the last iteration the covariance is $(I - K_iH_i)P$.

Chapter 11

# Linear Dynamical Systems

**In this chapter**

- Write physical systems in continuous- and discrete-time state-space form.
- Discretize deterministic inputs and white process noise exactly and approximately, including Van Loan's method.
- Understand stability, and why inertial errors grow polynomially.
- Define observability, test it with the observability matrix, and compute unobservable directions.
- Understand what observability means for the covariance of a Kalman filter.

The Kalman filter is built on a linear state-space model. This chapter collects the linear systems theory it needs: how to write a model, how to turn a continuous-time model into the discrete-time form a computer processes, and how to decide whether the measurements can determine the state at all.

## 11.1 State-space models

A continuous-time linear *state-space model* has the form

$$\dot{x}(t) = F(t)\,x(t) + B(t)\,u(t) + G(t)\,w(t), \qquad z(t) = H(t)\,x(t) + n(t), \tag{11.1}$$

with state $x$, known input $u$, white process noise $w$ (density $Q_c$), measurement $z$ and measurement noise $n$. The state is the smallest set of numbers whose present value, together with future inputs and noises, determines the future. Its discrete-time counterpart is

$$x_{k+1} = \Phi_k\,x_k + \Gamma_k\,u_k + w_k, \qquad z_k = H_k\,x_k + n_k, \qquad w_k \sim \mathcal{N}(0, Q_k),\ n_k \sim \mathcal{N}(0, R_k). \tag{11.2}$$

**Example 11.1** (Models used in these notes).

- *Constant velocity*: $x = (p, v)$, $\dot{p} = v$, $\dot{v} = w$ (white acceleration). $F = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$, $G = \begin{bmatrix} 0 \\ 1 \end{bmatrix}$.
- *Random-walk bias*: $\dot{b} = w_b$. $F = 0$, $G = 1$.
- *Inertial error model* (one axis, preview of Chapter 17): $\delta\dot{p} = \delta v$, $\delta\dot{v} = g\,\delta\theta - \delta b_a - n_a$, $\delta\dot{\theta} = -\delta b_g - n_g$, plus random-walk biases. A chain of integrators driven by noise.

The discrete-time solution follows by repeated substitution:

$$x_k = \Phi(k,0)\,x_0 + \sum_{j=0}^{k-1} \Phi(k, j+1)\big(\Gamma_j u_j + w_j\big), \qquad \Phi(k,j) = \Phi_{k-1}\Phi_{k-2}\cdots\Phi_j, \tag{11.3}$$

the discrete analog of the variation-of-constants formula (Proposition 4.7).

## 11.2 Discretization

Physical laws are continuous, computers are discrete. Over a step $\Delta t$ in which $F$, $B$ and $G$ are constant, the solution of (11.1) (Theorem 4.5) is

$$x(t+\Delta t) = \underbrace{e^{F\Delta t}}_{\Phi}\, x(t) + \int_0^{\Delta t} e^{Fs} B\, u(t+\Delta t - s)\,\mathrm{d}s + \underbrace{\int_0^{\Delta t} e^{Fs} G\, w(t+\Delta t - s)\,\mathrm{d}s}_{w_k}, \tag{11.4}$$

which has exactly the discrete form (11.2).

**Deterministic inputs.** If the input is held constant over the step (a *zero-order hold*, which is what a sampled IMU reading means), the input term is $\Gamma u_k$ with $\Gamma = \int_0^{\Delta t} e^{Fs}\,\mathrm{d}s\, B$. Both $\Phi$ and $\Gamma$ come from one matrix exponential,

$$\exp\!\left(\begin{bmatrix} F & B \\ 0 & 0 \end{bmatrix} \Delta t\right) = \begin{bmatrix} \Phi & \Gamma \\ 0 & I \end{bmatrix}, \tag{11.5}$$

which can be verified by noting that both sides solve the same matrix ODE in $\Delta t$.

**Process noise.** The discrete noise $w_k$ is a weighted integral of white noise, so it is zero-mean Gaussian with covariance (by the same calculation as in Proposition 6.5)

$$Q_d = \int_0^{\Delta t} e^{Fs}\, G Q_c G^{\mathsf{T}}\, e^{F^{\mathsf{T}} s}\,\mathrm{d}s. \tag{11.6}$$

### 11.2.1 Approximations

Expanding to first order in $\Delta t$ gives the approximations used by most real-time filters and frozen in AGENTS.md F2:

$$\Phi \approx I + F\Delta t, \qquad Q_d \approx G Q_c G^{\mathsf{T}}\, \Delta t. \tag{11.7}$$

Both are accurate to $O(\Delta t^2)$ per step. The units confirm the second: a noise density $\sigma_a$ in $\mathrm{m/s^2/\sqrt{Hz}}$ gives $\sigma_a^2 \Delta t$ in $\mathrm{m^2/s^2}$, a velocity variance. A second-order option adds $\frac{1}{2}F^2\Delta t^2$ to $\Phi$ and $\frac{1}{2}(FGQ_cG^{\mathsf{T}} + GQ_cG^{\mathsf{T}}F^{\mathsf{T}})\Delta t^2$ to $Q_d$.

**Example 11.2** (Double integrator). For position and velocity driven by white acceleration of density $\sigma$, $F = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$, $G = \begin{bmatrix} 0 \\ 1 \end{bmatrix}$, $Q_c = \sigma^2$. Example 3.16 gives $e^{Fs}G = [s;\ 1]$, so (11.6) evaluates exactly to

$$Q_d = \sigma^2 \begin{bmatrix} \Delta t^3/3 & \Delta t^2/2 \\ \Delta t^2/2 & \Delta t \end{bmatrix}. \tag{11.8}$$

The first-order approximation $Q_d \approx \mathrm{diag}(0, \sigma^2\Delta t)$ puts no noise on position within a single

step. Yet after $n$ steps of exact $\Phi$, the accumulated position variance is $\sum_{k=1}^{n}(k\Delta t)^2\sigma^2\Delta t \to \sigma^2 t^3/3$ as $\Delta t \to 0$ (a Riemann sum), which is the exact answer of Proposition 6.4. The per-step error of the approximation does not accumulate into a wrong growth law; it only introduces an $O(\Delta t)$ relative error, negligible at 200 Hz.

### 11.2.2 Van Loan's method

When higher accuracy is wanted, (11.6) can be computed exactly with a single matrix exponential [54].

**Proposition 11.3** (Van Loan). *Let* $C = \exp\left(\begin{bmatrix} -F & GQ_cG^{\mathsf{T}} \\ 0 & F^{\mathsf{T}} \end{bmatrix}\Delta t\right) = \begin{bmatrix} C_{11} & C_{12} \\ 0 & C_{22} \end{bmatrix}$. *Then* $\Phi = C_{22}^{\mathsf{T}}$ *and* $Q_d = \Phi\, C_{12}$.

*Proof.* For a block upper-triangular generator, the diagonal blocks of the exponential are the exponentials of the diagonal blocks, so $C_{22} = e^{F^{\mathsf{T}}\Delta t}$. The off-diagonal block, as a function of $\Delta t$, satisfies $\dot{C}_{12} = -FC_{12} + GQ_cG^{\mathsf{T}}C_{22}$ with $C_{12}(0) = 0$, whose solution (variation of constants) is $C_{12} = \int_0^{\Delta t} e^{-F(\Delta t - s)}\, GQ_cG^{\mathsf{T}}\, e^{F^{\mathsf{T}}s}\,\mathrm{d}s$. Multiplying by $\Phi = e^{F\Delta t}$ on the left, and using $e^{F\Delta t}e^{-F(\Delta t-s)} = e^{Fs}$, gives $\Phi C_{12} = \int_0^{\Delta t} e^{Fs}\, GQ_cG^{\mathsf{T}}\, e^{F^{\mathsf{T}}s}\,\mathrm{d}s$, which is (11.6). ∎

For the 15-state inertial error model this costs a $30 \times 30$ matrix exponential per step, too expensive at 200 Hz but an excellent test oracle for the closed forms of Chapter 17.

## 11.3 Stability

A linear time-invariant system is *stable* if its free response decays. For $\dot{x} = Fx$ the modes are $e^{\lambda_i t}$ (Theorem 4.5), so the system is asymptotically stable when all eigenvalues of $F$ have negative real parts. For $x_{k+1} = \Phi x_k$ the modes are $\lambda_i^k$, so all eigenvalues of $\Phi$ must lie strictly inside the unit circle; the two conditions correspond through $\lambda_\Phi = e^{\lambda_F \Delta t}$.

Integrators have eigenvalues at zero (continuous) or one (discrete): they are *marginally* stable. A single integrator holds its state; a chain of integrators (a nilpotent $F$) makes initial errors grow *polynomially*, like $t$, $t^2$, $t^3$. The error dynamics of inertial navigation are of this kind (Example 11.1), which is why IMU errors grow polynomially rather than exponentially, and why they never stop growing without aiding.

## 11.4 Observability

### 11.4.1 Definition and the observability matrix

**Definition 11.4** (Observability). A system is *observable* if the initial state $x_0$ can be determined from the inputs and the noise-free outputs over a finite time.

Because the inputs are known, their contribution to the outputs can be subtracted, so observability depends only on $(\Phi, H)$. For a discrete time-invariant system without noise,

$z_k = H\Phi^k x_0$. Stacking the first $n$ outputs,

$$\begin{bmatrix} z_0 \\ z_1 \\ \vdots \\ z_{n-1} \end{bmatrix} = \underbrace{\begin{bmatrix} H \\ H\Phi \\ \vdots \\ H\Phi^{n-1} \end{bmatrix}}_{O} x_0. \tag{11.9}$$

**Theorem 11.5** (Observability rank test). *The system is observable if and only if the* observability matrix $O$ *has rank $n$. Its nullspace is the* unobservable subspace*: the initial states that produce identically zero output forever.*

*Proof.* If $O$ has full column rank, $x_0$ is the unique solution of the stacked equations. If $Ox_0 = 0$ for some $x_0 \neq 0$, then $H\Phi^k x_0 = 0$ for $k < n$, and by the Cayley–Hamilton theorem ($\Phi^n$ is a linear combination of $I, \Phi, \ldots, \Phi^{n-1}$) also for all $k \geq n$; such an $x_0$ is indistinguishable from zero. More outputs never add rank beyond the first $n$. ∎

The unobservable subspace is invariant under $\Phi$: an unobservable error stays unobservable as the system evolves. For time-varying systems, the same reasoning gives $O = [H_0;\ H_1\Phi(1,0);\ H_2\Phi(2,0);\ \ldots]$, and observability can depend on the trajectory, a fact that matters greatly for VIO (Chapter 29).

### 11.4.2 Examples

**Example 11.6** (Position versus velocity measurements). For the discretized constant-velocity model, $\Phi = \begin{bmatrix} 1 & \Delta t \\ 0 & 1 \end{bmatrix}$.

- Measuring position, $H = [1\ \ 0]$: $O = \begin{bmatrix} 1 & 0 \\ 1 & \Delta t \end{bmatrix}$ has rank 2. Velocity is observable, through the change of position.
- Measuring velocity, $H = [0\ \ 1]$: $O = \begin{bmatrix} 0 & 1 \\ 0 & 1 \end{bmatrix}$ has rank 1, with nullspace $(1, 0)$. Position is unobservable: shifting the whole trajectory changes no measurement. This is dead reckoning in one line.

**Example 11.7** (A bias that looks like the state). Let $x = (p, b)$ with $\dot{p} = 0$, $\dot{b} = 0$ and $z = p + b$. Then $H = [1\ \ 1]$, $\Phi = I$, and $O = \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix}$ has nullspace $(1, -1)$: a change of position compensated by an opposite change of bias is invisible. A sensor bias can be estimated only if something else breaks this symmetry. In inertial navigation that something is motion: an accelerometer bias becomes separable from tilt once the vehicle rotates (Chapter 16).

**Example 11.8** (An IMU along a line). Let $x = (p, v, b_a)$ with $\dot{p} = v$, $\dot{v} = a_m - b_a$ ($a_m$ known) and $\dot{b}_a = 0$, and measure $p$. In continuous time, $F = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & -1 \\ 0 & 0 & 0 \end{bmatrix}$ and $H = [1\ 0\ 0]$,

and the continuous-time observability matrix $[H;\ HF;\ HF^2]$ is $\begin{bmatrix}1 & 0 & 0\\ 0 & 1 & 0\\ 0 & 0 & -1\end{bmatrix}$, of full rank. Position measurements reveal velocity (one differentiation) and the accelerometer bias (two differentiations): the reason a pose sensor makes all IMU states observable in Milestone 6.

### 11.4.3 Duality and controllability

The dual notion, *controllability*, asks whether the inputs (or noises) can drive the state anywhere; its test matrix is $[\Gamma,\ \Phi\Gamma,\ \ldots,\ \Phi^{n-1}\Gamma]$, and $(\Phi, \Gamma)$ is controllable exactly when $(\Phi^\mathsf{T}, \Gamma^\mathsf{T})$ is observable. For a Kalman filter, controllability by the process noise means that every state is continually excited by noise, which keeps the filter from becoming certain of anything and ignoring new data.

### 11.4.4 What observability means for a filter

For a time-invariant system that is observable from its measurements and controllable from its process noise, the Kalman filter covariance converges to a unique, bounded steady state, whatever the initial covariance (Chapter 12). Along unobservable directions there is no such bound: the covariance there can only grow with process noise or stay at its prior value, because no measurement reduces it. A filter must respect this. If its linearized model makes an unobservable direction appear observable, it will *reduce* the covariance along that direction without justification, and become overconfident. This is precisely what happens to the standard EKF in VIO (Chapter 29).

**Key takeaways**

- State-space models collect everything needed to predict the future; discrete models follow from continuous ones by integrating over a step.
- $\Phi = e^{F\Delta t}$, $Q_d = \int e^{Fs} G Q_c G^\mathsf{T} e^{F^\mathsf{T} s} \mathrm{d}s$; to first order $\Phi \approx I + F\Delta t$ and $Q_d \approx G Q_c G^\mathsf{T} \Delta t$. Van Loan computes both exactly.
- Chains of integrators are marginally stable: their errors grow polynomially.
- Observability: $\mathcal{O} = [H;\ H\Phi;\ \ldots]$ must have full rank; its nullspace contains the directions the outputs cannot see.
- A filter may reduce uncertainty only in observable directions.

## Exercises

**11.1** Write the mass-spring-damper $m\ddot{y} + c\dot{y} + ky = u$ in state-space form and find its eigenvalues. When is it stable?

**11.2** Compute $\Gamma$ for the double integrator with a zero-order-hold acceleration input, and interpret its entries.

**11.3** Verify Proposition 11.3 numerically for the double integrator.

**11.4** Find the unobservable subspace of the constant-velocity model with measurements of $p_1 - p_2$ for two independent targets.

**11.5** Show that the continuous-time system $\dot{x} = Fx$, $z = Hx$ is observable if and only if $[H;\ HF;\ \ldots;\ HF^{n-1}]$ has full rank.

**11.6** A gyroscope measures $\omega + b_g$, and an inclinometer measures the integrated angle. Is the gyro bias observable? What if the inclinometer is replaced by a second gyroscope?

## Solutions to the exercises

**11.1** With $x = (y, \dot{y})$,

$$\dot{x} = \begin{bmatrix} 0 & 1 \\ -k/m & -c/m \end{bmatrix} x + \begin{bmatrix} 0 \\ 1/m \end{bmatrix} u.$$

The characteristic polynomial is $\lambda^2 + (c/m)\lambda + k/m$, so $\lambda = \big(-c \pm \sqrt{c^2 - 4km}\big)/2m$, or $\lambda = -\zeta\omega_n \pm \omega_n\sqrt{\zeta^2 - 1}$ with $\omega_n = \sqrt{k/m}$ and $\zeta = c/(2\sqrt{km})$. For $m > 0$ both roots have negative real parts exactly when $c > 0$ and $k > 0$ (a quadratic with positive coefficients): the system is asymptotically stable. Underdamped ($\zeta < 1$) it oscillates with decaying amplitude; with $c = 0$ the eigenvalues $\pm i\omega_n$ lie on the imaginary axis and the system is only marginally stable; with $k < 0$ (a negative spring) one eigenvalue is positive and it is unstable. This is the accelerometer model of Chapter 15.

**11.2** With $F = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$ and $B = \begin{bmatrix} 0 \\ 1 \end{bmatrix}$, $e^{Fs}B = \begin{bmatrix} s \\ 1 \end{bmatrix}$ (Example 3.16), so

$$\Gamma = \int_0^{\Delta t} e^{Fs} B \, \mathrm{d}s = \begin{bmatrix} \Delta t^2/2 \\ \Delta t \end{bmatrix}.$$

An acceleration $a$ held constant over the step adds $\frac{1}{2}a\Delta t^2$ to the position and $a\Delta t$ to the velocity: the familiar kinematics of constant acceleration, exact for a zero-order-hold input. The block exponential $\exp\big(\begin{bmatrix} F & B \\ 0 & 0 \end{bmatrix}\Delta t\big)$, whose generator is nilpotent ($3\times 3$ with cube zero), gives the same result after two terms.

**11.3** With $\Delta t = 0.1$ and $\sigma = 1$, `scipy.linalg.expm` of $\begin{bmatrix} -F & GQ_cG^\mathsf{T} \\ 0 & F^\mathsf{T} \end{bmatrix}\Delta t$ gives

$$\Phi = C_{22}^\mathsf{T} = \begin{bmatrix} 1 & 0.1 \\ 0 & 1 \end{bmatrix}, \qquad Q_d = \Phi C_{12} = \begin{bmatrix} 3.333\times 10^{-4} & 5\times 10^{-3} \\ 5\times 10^{-3} & 0.1 \end{bmatrix},$$

which equals the exact $\sigma^2 \begin{bmatrix} \Delta t^3/3 & \Delta t^2/2 \\ \Delta t^2/2 & \Delta t \end{bmatrix}$ of Example 11.2 to $10^{-18}$.

**11.4** With $x = (p_1, v_1, p_2, v_2)$, $\Phi = \mathrm{blkdiag}\big(\begin{bmatrix} 1 & \Delta t \\ 0 & 1 \end{bmatrix}, \begin{bmatrix} 1 & \Delta t \\ 0 & 1 \end{bmatrix}\big)$ and $H = [1\ 0\ -1\ 0]$, the rows of the observability matrix are $H\Phi^k = [1\ \ k\Delta t\ \ -1\ \ -k\Delta t]$, which span a two-dimensional space: $\operatorname{rank} \mathcal{O} = 2$. The unobservable subspace is

$$\mathrm{null}(\mathcal{O}) = \mathrm{span}\{(1,0,1,0),\ (0,1,0,1)\} :$$

a common translation and a common velocity of both targets. The relative measurement reveals the relative position and the relative velocity, but nothing about where the pair is or how it moves as a whole: the one-dimensional version of the unobservable global position of VIO.

**11.5** For $\dot{x} = Fx$, $z(t) = He^{Ft}x_0$, and the derivatives of the output at $t = 0$ are $z^{(k)}(0) = HF^k x_0$. If $\mathcal{O}_c = [H;\ HF;\ \ldots;\ HF^{n-1}]$ has full column rank, the noise-free output over any

interval determines these derivatives and hence $x_0 = (O_c^\mathsf{T} O_c)^{-1} O_c^\mathsf{T} (z(0), \dot{z}(0), \dots)$. Conversely, if $O_c x_0 = 0$ for some $x_0 \neq 0$, then $HF^k x_0 = 0$ for $k < n$, and by the Cayley–Hamilton theorem for all $k$, so $z(t) = \sum_k \frac{t^k}{k!} HF^k x_0 = 0$ for all $t$: $x_0$ produces the same output as the zero state, and the system is unobservable.

**11.6** Let the state be $(\theta, b_g)$ with the gyro reading $\omega_m$ as the known input: $\dot{\theta} = \omega_m - b_g$, $\dot{b}_g = 0$, and the inclinometer measures $z = \theta$. Then $F = \begin{bmatrix} 0 & -1 \\ 0 & 0 \end{bmatrix}$, $H = [1 \;\; 0]$, and $O = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix}$ has full rank: the bias is observable, as the slope of the difference between the integrated gyro and the inclinometer. With a second gyroscope instead, the two readings are $\omega + b_1$ and $\omega + b_2$ of the same unknown rate $\omega$. Shifting $\omega \to \omega + c$, $b_1 \to b_1 - c$, $b_2 \to b_2 - c$ leaves both readings unchanged for every $c$, so only the difference $b_1 - b_2$ is observable: neither bias, nor the angle, can be recovered. Observing a bias needs an independent measurement of the quantity the sensor integrates, not another copy of the same sensor.

Chapter 12

# The Kalman Filter

**In this chapter**

- Derive the Kalman filter from Bayes' rule and Gaussian conditioning, and recognize it as linear MMSE estimation and recursive least squares with dynamics.
- Understand the gain, the innovation and its covariance, the several equivalent forms of the covariance update, and the information form.
- Prove that the innovations of a correct filter are white, and use this to test filters without ground truth.
- Know why the Joseph form is used and how to implement the update without explicit inverses.
- Understand steady-state behavior, sequential updates, colored noise, continuous-time filtering and smoothing.
- Work a filter through by hand.

Rudolf Kálmán's 1960 paper [32] gave a recursive solution to linear estimation that needs only the current estimate and covariance. It flew on Apollo and remains the backbone of navigation. This chapter derives it for linear systems; Chapters 13 and 14 extend it to the nonlinear, manifold-valued state of VIO.

## 12.1 The model

A discrete-time linear system with Gaussian noise is described by (Chapter 11)

$$x_k = \Phi_k\, x_{k-1} + w_k, \qquad w_k \sim \mathcal{N}(0, Q_k), \tag{12.1}$$

$$z_k = H_k\, x_k + n_k, \qquad n_k \sim \mathcal{N}(0, R_k), \tag{12.2}$$

with $x_0 \sim \mathcal{N}(\hat{x}_0, P_0)$, and with $x_0$, $\{w_k\}$ and $\{n_k\}$ mutually independent and white. $\Phi_k$ is the state transition matrix, $Q_k$ the process noise covariance, $H_k$ the measurement matrix and $R_k$ the measurement noise covariance; known inputs add a term $\Gamma_k u_k$ that only shifts the mean. Continuous-time models are discretized as in Section 11.2. The goal is the posterior $p(x_k \mid z_{1:k})$ given all measurements up to time $k$.

## 12.2 The Bayes filter

Two structural assumptions make recursion possible. The state is *Markov*: given $x_{k-1}$, the earlier states and measurements carry no further information about $x_k$. And each

measurement depends only on the current state. Then the posterior can be computed recursively in two steps:

$$\textbf{predict:} \quad p(x_k \mid z_{1:k-1}) = \int p(x_k \mid x_{k-1})\, p(x_{k-1} \mid z_{1:k-1})\, \mathrm{d}x_{k-1}, \tag{12.3}$$

$$\textbf{update:} \quad p(x_k \mid z_{1:k}) = \frac{p(z_k \mid x_k)\, p(x_k \mid z_{1:k-1})}{p(z_k \mid z_{1:k-1})}. \tag{12.4}$$

The prediction marginalizes the previous state out of the joint density $p(x_k, x_{k-1} \mid z_{1:k-1}) = p(x_k \mid x_{k-1}) p(x_{k-1} \mid z_{1:k-1})$ (using the Markov property); the update is Bayes' rule, with the new measurement independent of the past given the current state. For a linear-Gaussian model all of these densities are Gaussian, so each step reduces to updating a mean and a covariance. We write $\hat{x}_k^-, P_k^-$ for the predicted (prior) moments and $\hat{x}_k^+, P_k^+$ for the updated (posterior) moments.

## 12.3 Derivation

### 12.3.1 Prediction

By Proposition 5.7 applied to (12.1), with $x_{k-1}$ and $w_k$ independent,

$$\hat{x}_k^- = \Phi_k\, \hat{x}_{k-1}^+, \qquad P_k^- = \Phi_k P_{k-1}^+ \Phi_k^\mathsf{T} + Q_k. \tag{12.5}$$

Prediction moves the error with the dynamics and adds process noise; it never decreases uncertainty in the directions excited by $Q_k$.

### 12.3.2 Update

Before the measurement arrives, the state and the measurement are jointly Gaussian. From (12.2), dropping the time index,

$$\begin{bmatrix} x \\ z \end{bmatrix} \sim \mathcal{N}\left( \begin{bmatrix} \hat{x}^- \\ H\hat{x}^- \end{bmatrix}, \begin{bmatrix} P^- & P^- H^\mathsf{T} \\ HP^- & HP^- H^\mathsf{T} + R \end{bmatrix} \right). \tag{12.6}$$

Conditioning on the observed $z$ with Theorem 5.11 gives the update directly.

**Theorem 12.1** (Kalman update). *Define the* innovation *(residual)* $r = z - H\hat{x}^-$*, its covariance* $S = HP^-H^\mathsf{T} + R$*, and the* Kalman gain $K = P^-H^\mathsf{T}S^{-1}$*. Then*

$$\hat{x}^+ = \hat{x}^- + Kr, \qquad P^+ = P^- - KSK^\mathsf{T} = (I - KH)\, P^-. \tag{12.7}$$

*Proof.* Equation (5.10) with $\Sigma_{ab} = P^-H^\mathsf{T}$ and $\Sigma_{bb} = S$ gives $\hat{x}^+ = \hat{x}^- + P^-H^\mathsf{T}S^{-1}(z - H\hat{x}^-)$ and $P^+ = P^- - P^-H^\mathsf{T}S^{-1}HP^-$. Since $KSK^\mathsf{T} = P^-H^\mathsf{T}S^{-1}HP^- = KHP^-$, both covariance forms agree. ∎

The same formulas arise from the other routes of Chapter 9: they are the linear MMSE estimate (9.8) (so the Kalman filter is the best *linear* filter even for non-Gaussian noise with

the same second moments), the MAP estimate of Proposition 5.12, and recursive least squares with a prediction step inserted between measurements.

**Key idea: the gain is a ratio of uncertainties**

For a scalar state measured directly ($H = 1$), $K = \frac{P^-}{P^- + R}$ and $P^+ = \frac{P^- R}{P^- + R}$. If the prior is much more uncertain than the sensor ($P^- \gg R$), $K \to 1$ and the estimate jumps to the measurement. If the sensor is much worse ($R \gg P^-$), $K \to 0$ and the measurement is nearly ignored. The posterior variance is always smaller than both. In general, $K$ maps the innovation, which lives in measurement space, into a correction in state space, including corrections to states that are not measured directly but are correlated with measured ones through $P^-$. This is how a pose measurement corrects velocity and biases.

### 12.3.3 The information form

Applying the Woodbury identity (Theorem 3.12) to $P^+ = P^- - P^- H^\mathsf{T}(HP^-H^\mathsf{T} + R)^{-1}HP^-$ gives

$$(P^+)^{-1} = (P^-)^{-1} + H^\mathsf{T} R^{-1} H, \qquad K = P^+ H^\mathsf{T} R^{-1}. \tag{12.8}$$

Information adds: each independent measurement contributes $H^\mathsf{T} R^{-1} H$. The covariance form (12.7) inverts an $m \times m$ matrix ($m$ = measurement dimension); the information form inverts an $n \times n$ matrix ($n$ = state dimension). Filters use the former when $m < n$; the *information filter*, which propagates $(P^{-1}, P^{-1}\hat{x})$ instead, is preferred when measurements are many and large and the prediction step is simple.

## 12.4 A worked example by hand

**Worked example: a random walk observed directly**

A scalar state follows $x_k = x_{k-1} + w_k$ with $Q = 1$ and is measured as $z_k = x_k + n_k$ with $R = 2$. Start from $\hat{x}_0 = 0$, $P_0 = 4$, and receive $z_1 = 1.5$, $z_2 = 2.0$.

| | $k = 1$ | $k = 2$ |
|---|---|---|
| predict | $\hat{x}_1^- = 0$, $P_1^- = 4 + 1 = 5$ | $\hat{x}_2^- = 1.071$, $P_2^- = 1.429 + 1 = 2.429$ |
| innovation | $r_1 = 1.5$, $S_1 = 5 + 2 = 7$ | $r_2 = 2.0 - 1.071 = 0.929$, $S_2 = 4.429$ |
| gain | $K_1 = 5/7 = 0.714$ | $K_2 = 2.429/4.429 = 0.548$ |
| update | $\hat{x}_1^+ = 1.071$, $P_1^+ = 5 \cdot 2/7 = 1.429$ | $\hat{x}_2^+ = 1.071 + 0.548 \cdot 0.929 = 1.581$, $P_2^+ = 1.097$ |

The variance falls from 4 to about 1.1 in two steps and then settles where the information gained per measurement balances the uncertainty added per step: solving $P^- = P^- R/(P^- + R) + Q$ gives $P_\infty^- = \frac{1}{2}(Q + \sqrt{Q^2 + 4QR}) = 2$, $K_\infty = 0.5$, $P_\infty^+ = 1$.

## 12.5 Properties

**Proposition 12.2** (Optimality). *For the linear-Gaussian model, $\hat{x}_k^+ = \mathbb{E}[x_k \mid z_{1:k}]$: the Kalman filter is the minimum mean-square error estimator among* all *estimators, linear or not (Theorem 9.8). If the noises are not Gaussian but have the stated means and covariances, it remains the best* linear *estimator (Theorem 9.9).*

**Proposition 12.3** (Innovation properties). *If the model is correct, the innovations $r_k$ are zero-mean, Gaussian, with covariance $S_k$, and uncorrelated across time. Consequently $r_k^\mathsf{T} S_k^{-1} r_k \sim \chi^2_{m_k}$.*

*Proof.* $r_k = H_k(x_k - \hat{x}_k^-) + n_k$ is a linear combination of zero-mean Gaussians; its two terms are independent, giving covariance $H_k P_k^- H_k^\mathsf{T} + R_k = S_k$. For whiteness, take $j < k$. The innovation $r_j$ is a linear function of $z_1, \dots, z_j$. The prediction error $x_k - \hat{x}_k^-$ is uncorrelated with every past measurement by the orthogonality principle (Theorem 9.9), and $n_k$ is independent of the past; hence $\mathbb{E}[r_k r_j^\mathsf{T}] = H_k \mathbb{E}[(x_k - \hat{x}_k^-) r_j^\mathsf{T}] + \mathbb{E}[n_k r_j^\mathsf{T}] = 0$. The $\chi^2$ statement is Theorem 5.17. ∎

Proposition 12.3 is the most useful diagnostic in filtering, because it can be checked on real data without ground truth. The *normalized innovation squared* (NIS) $r^\mathsf{T} S^{-1} r$ should look like a $\chi^2_m$ sample, and the innovation sequence should look white. Values that are systematically too large mean the filter is overconfident or the model is wrong; systematically too small means it is underconfident; correlation in time reveals unmodeled dynamics. Gating (Chapter 18) uses the same statistic one measurement at a time.

### 12.5.1 Steady state

For a time-invariant model, the covariance recursion does not depend on the measurements at all: it can be computed in advance. Substituting the update into the prediction gives the *discrete Riccati equation*

$$P_{k+1}^- = \Phi\big(P_k^- - P_k^- H^\mathsf{T} (H P_k^- H^\mathsf{T} + R)^{-1} H P_k^-\big)\Phi^\mathsf{T} + Q. \tag{12.9}$$

If $(\Phi, H)$ is observable (more precisely, detectable) and $(\Phi, Q^{1/2})$ is controllable (stabilizable), $P_k^-$ converges to the unique positive semi-definite solution of the algebraic Riccati equation obtained by setting $P_{k+1}^- = P_k^-$, from any initial $P_0$, and the gain converges to a constant. The worked example shows this convergence. Navigation filters are not time-invariant, but the same balance between injected and gained information governs them: in observable directions the covariance settles to a level set by the noise; in unobservable directions it does not (Section 11.4).

## 12.6 The Joseph form

**Proposition 12.4** (Joseph form). *For* any *gain $K$ (optimal or not), the error covariance after the update $\hat{x}^+ = \hat{x}^- + K(z - H\hat{x}^-)$ is*

$$P^+ = (I - KH)\, P^- \,(I - KH)^\mathsf{T} + K R K^\mathsf{T}. \tag{12.10}$$

*For the optimal gain it equals $(I - KH)P^-$.*

**Algorithm 2** Numerically careful Kalman update

**Input:** prior $(\hat{x}, P)$, measurement $z$, model $(H, R)$

$r \leftarrow z - H\hat{x}$ ▷ innovation
$S \leftarrow HPH^\mathsf{T} + R; \quad S \leftarrow \frac{1}{2}(S + S^\mathsf{T})$
$L \leftarrow \mathrm{chol}(S)$ ▷ or $\mathrm{LDL}^\mathsf{T}$; failure means $S$ is not PD
$\gamma \leftarrow \|L^{-1}r\|^2$ ▷ NIS, for gating and logging
**if** $\gamma > \chi^2_{0.95}(\dim r)$ **then**
    **return** reject (and count it)
solve $S\,K^\mathsf{T} = HP$ for $K^\mathsf{T}$ using $L$ ▷ never form $S^{-1}$
$\hat{x} \leftarrow \hat{x} + Kr$
$P \leftarrow (I - KH)P(I - KH)^\mathsf{T} + KRK^\mathsf{T}; \quad P \leftarrow \frac{1}{2}(P + P^\mathsf{T})$

*Proof.* The posterior error is $e^+ = x - \hat{x}^+ = (I - KH)(x - \hat{x}^-) - Kn$. Its two terms are independent, so by Proposition 5.7 its covariance is (12.10). Expanding with $K = P^-H^\mathsf{T}S^{-1}$: $(I - KH)P^-(I - KH)^\mathsf{T} + KRK^\mathsf{T} = (I - KH)P^- - (I - KH)P^-H^\mathsf{T}K^\mathsf{T} + KRK^\mathsf{T} = (I - KH)P^- - P^-H^\mathsf{T}K^\mathsf{T} + KSK^\mathsf{T}$, and the last two terms cancel because $KSK^\mathsf{T} = P^-H^\mathsf{T}K^\mathsf{T}$. ∎

Why use the longer formula? In floating point, $(I - KH)P^-$ is the difference of two nearly equal matrices when the update is informative, and it is not symmetric. Rounding can push small eigenvalues negative, after which the filter is broken: variances become negative, Cholesky fails, gates misbehave. The Joseph form is a sum of a congruence of $P^-$ and a congruence of $R$, so by Proposition 2.29 it is PSD whenever $P^-$ and $R$ are, regardless of rounding in $K$. It also remains correct when $K$ is deliberately suboptimal (for example, a gain computed with a slightly stale $P$). AGENTS.md F3 mandates it.

**Implementation note: cost of the Joseph form**

With $n$ states and $m$ measurements, $(I - KH)P(I - KH)^\mathsf{T}$ costs $O(n^3)$ if done naively. For the MSCKF ($n = 75$) this is fine. If it ever matters, note that the update can be rearranged as $P^+ = P - KHP - (KHP)^\mathsf{T} + KSK^\mathsf{T}$, which costs $O(n^2m)$ and is algebraically identical to the Joseph form for any gain. It no longer has the sum-of-congruences structure that guarantees positive semi-definiteness under rounding, though, so keep the symmetrization and monitor the smallest eigenvalue in tests. Profile before optimizing.

## 12.7 Implementing the update

Algorithm 2 collects the numerical rules of the previous sections. Two details deserve comment. The gain is obtained by solving $SK^\mathsf{T} = HP^\mathsf{T} = HP$ (since $P$ is symmetric), so the Cholesky factor of $S$ is reused for both the gate and the gain. And symmetrization after each step removes the asymmetry that rounding introduces, which otherwise slowly accumulates (AGENTS.md F2).

### 12.7.1 Sequential updates

**Proposition 12.5** (Sequential processing). *If a stacked measurement $z = (z_1, z_2)$ has block-diagonal noise covariance $R = \mathrm{blkdiag}(R_1, R_2)$, updating with $z_1$ and then with $z_2$ gives exactly the same posterior as a single update with $z$.*

*Proof.* With independent noise blocks, the likelihood factorizes, $p(z \mid x) = p(z_1 \mid x)p(z_2 \mid x)$, so $p(x \mid z) \propto p(z_2 \mid x)\left[p(z_1 \mid x)p(x)\right] \propto p(z_2 \mid x)\, p(x \mid z_1)$: updating with $z_2$ the posterior after $z_1$. Both updates are exact for linear-Gaussian models. (In information form: the information contributions $H_1^\mathsf{T} R_1^{-1} H_1 + H_2^\mathsf{T} R_2^{-1} H_2$ simply add.) ∎

Sequential processing can reduce cost (several small inversions instead of one large one) and allows per-block gating. If the blocks share errors (correlated $R$), sequential processing without accounting for the correlation is wrong. For nonlinear models the two orders differ slightly, because the second update is linearized at the estimate produced by the first.

## 12.8 Extensions

**Colored noise.** The derivation assumed white process and measurement noise. Time-correlated disturbances are handled by adding the state of a shaping filter to the filter state (Chapter 6): this is why IMU biases, which are random walks, are state variables.

**Continuous time: the Kalman–Bucy filter.** For continuous measurements $z(t) = Hx + n$ with white $n$ of density $R_c$, the limit of the discrete filter as the sampling period goes to zero is

$$\dot{\hat{x}} = F\hat{x} + K\big(z - H\hat{x}\big), \qquad K = PH^\mathsf{T} R_c^{-1}, \qquad \dot{P} = FP + PF^\mathsf{T} + GQ_cG^\mathsf{T} - PH^\mathsf{T} R_c^{-1} HP, \tag{12.11}$$

a Lyapunov equation (Proposition 6.5) with an information term subtracted. Navigation filters process sampled measurements and use the discrete form, but the continuous form gives insight into steady-state behavior.

**Smoothing.** A filter estimates $x_k$ from measurements up to time $k$. A *smoother* also uses later measurements, which can only improve the estimate. The Rauch–Tung–Striebel smoother runs a Kalman filter forward, storing $\hat{x}_k^\pm$ and $P_k^\pm$, and then sweeps backward:

$$C_k = P_k^+ \Phi_{k+1}^\mathsf{T} (P_{k+1}^-)^{-1}, \qquad \hat{x}_{k|N} = \hat{x}_k^+ + C_k(\hat{x}_{k+1|N} - \hat{x}_{k+1}^-), \qquad P_{k|N} = P_k^+ + C_k(P_{k+1|N} - P_{k+1}^-)C_k^\mathsf{T}. \tag{12.12}$$

Real-time VIO is a filtering problem, but the MSCKF smooths in a limited sense: the past poses kept as clones in its sliding window are corrected by every later update that involves them.

## 12.9 A simulated example

Figure 12.1 shows the filter on the constant-velocity model (Example 11.2), with position measurements at 10 Hz. Three behaviors generalize to VIO. The covariance converges from

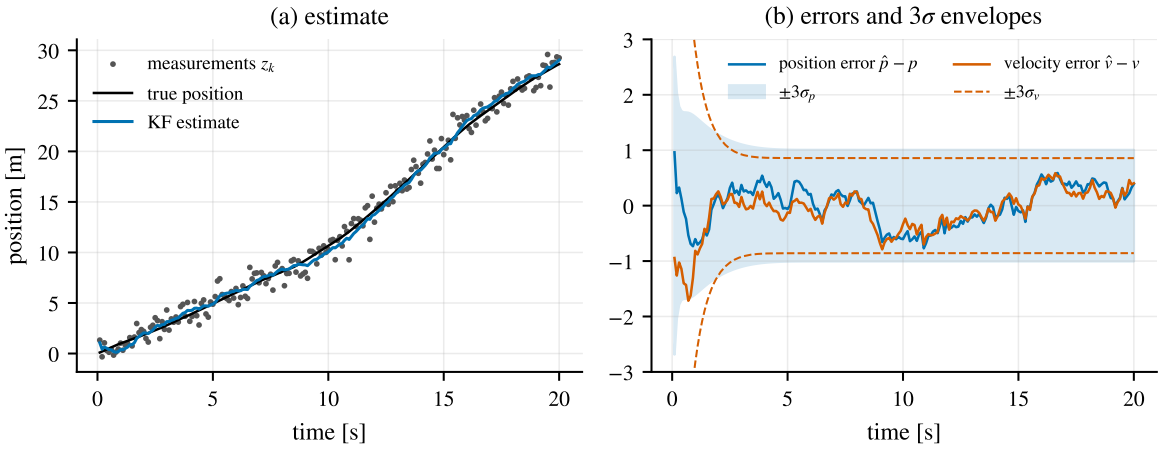



**Figure 12.1:** A constant-velocity Kalman filter tracking a 1D target from noisy position measurements. (a) The estimate smooths the measurements. (b) The errors stay inside the $\pm 3\sigma$ envelopes, which shrink quickly from the uninformative prior and settle at the steady-state values set by the balance between process noise and measurement noise. The velocity is never measured, yet it is estimated through its correlation with position.

its initial value to a steady state determined only by $Q$, $R$ and the geometry, not by the data. The unmeasured state (velocity) is estimated through the correlation that the dynamics build up between position and velocity. And the errors stay inside the $3\sigma$ envelope about 99.7% of the time, the visual signature of a consistent filter.

**Key takeaways**

- Predict: $\hat{x} \leftarrow \Phi\hat{x}$, $P \leftarrow \Phi P \Phi^{\mathsf{T}} + Q$. Update: condition the joint Gaussian of state and measurement.
- $K = PH^{\mathsf{T}}S^{-1}$ maps innovations into state corrections, including corrections to unmeasured but correlated states.
- The Kalman filter is the exact Bayesian filter for linear-Gaussian models and the best linear filter otherwise.
- Innovations of a correct filter are white with covariance $S$; their NIS is $\chi^2$. This is testable without ground truth.
- Time-invariant observable systems reach a steady state set by the balance of process and measurement noise.
- Use the Joseph form, solve rather than invert, and symmetrize. Independent measurement blocks may be processed sequentially.

## Exercises

**12.1** Derive (12.7) for a scalar state measured twice by independent sensors of variances $R_1$ and $R_2$, first sequentially, then as a stacked 2D measurement. Show that the results agree.

**12.2** Show that $P^{+} \preceq P^{-}$ for the optimal gain. Is this still true for an arbitrary gain in the Joseph form?

**12.3** Construct a $2 \times 2$ example in which $(I - KH)P^{-}$ computed in single precision is not positive semi-definite while the Joseph form is.

**12.4** Continue the worked example for five more steps and verify that $P_k^{-}$ converges to 2.

**12.5** For the scalar random walk with process variance $q$ and measurement variance $r$, derive $P_\infty^{-} = \tfrac{1}{2}(q + \sqrt{q^2 + 4qr})$ and the steady-state gain. What happens as $q/r \to 0$ and $q/r \to \infty$?

**12.6** Implement Algorithm 2 in Python, reproduce Figure 12.1, and compute the fraction of time steps where the position error lies outside $\pm 3\sigma$.

**12.7** Test the whiteness of the innovations of your filter by computing their sample autocorrelation. Then mis-tune $Q$ and repeat.

## Solutions to the exercises

**12.1** Let the prior be $(\hat{x}, P)$ and the measurements $z_i = x + n_i$ with variances $R_i$. *Sequentially*: the first update gives $K_1 = P/(P + R_1)$, $\hat{x}_1 = \hat{x} + K_1(z_1 - \hat{x})$ and $P_1 = PR_1/(P + R_1)$, i.e. $P_1^{-1} = P^{-1} + R_1^{-1}$ and $P_1^{-1}\hat{x}_1 = P^{-1}\hat{x} + R_1^{-1}z_1$; the second adds $R_2^{-1}$ and $R_2^{-1}z_2$ in the same way:

$$P_2^{-1} = P^{-1} + R_1^{-1} + R_2^{-1}, \qquad \hat{x}_2 = P_2\big(P^{-1}\hat{x} + R_1^{-1}z_1 + R_2^{-1}z_2\big).$$

*Stacked*: $H = (1,1)^\mathsf{T}$ and $R = \operatorname{diag}(R_1, R_2)$. Then $S = \begin{bmatrix} P + R_1 & P \\ P & P + R_2 \end{bmatrix}$ with $\det S = P(R_1 + R_2) + R_1R_2$, and $K = P(1,1)S^{-1} = \frac{P}{\det S}(R_2, R_1)$. Hence $P^+ = P - KHP = P - \frac{P^2(R_1+R_2)}{\det S} = \frac{PR_1R_2}{\det S}$, whose inverse is $P^{-1} + R_1^{-1} + R_2^{-1}$, and

$$\hat{x}^+ = \hat{x} + \frac{P}{\det S}\big(R_2(z_1 - \hat{x}) + R_1(z_2 - \hat{x})\big),$$

which, multiplied out, equals $\hat{x}_2$. Both routes give the same posterior, as the sequential-processing proposition states.

**12.2** By (12.7), $P^- - P^+ = KSK^\mathsf{T}$, which is PSD because $S > 0$ (it is a congruence of $S$); so $P^+ \preceq P^-$. For an arbitrary gain, write $K = K_\star + D$ with $K_\star$ optimal. Expanding the Joseph form and using $K_\star S = P^-H^\mathsf{T}$,

$$P^+(K) = (I - KH)P^-(I - KH)^\mathsf{T} + KRK^\mathsf{T} = P^+(K_\star) + DSD^\mathsf{T}.$$

The optimal gain therefore minimizes the posterior covariance, but a poor gain can make it *larger* than the prior: for $P^- = H = R = 1$ and $K = 2$, $P^+ = (1-2)^2 + 4 = 5 > 1$. That is correct, not a flaw: a badly weighted update really does make the estimate worse, and the Joseph form reports its true covariance. The form $(I - KH)P^-$ would report $-1$.

**12.3** Take $P^- = \begin{bmatrix} 10^4 & 9.99 \\ 9.99 & 0.01 \end{bmatrix}$ (correlation 0.999), $H = [1 \;\; 0]$ and $R = 10^{-4}$, an extremely accurate measurement of the first state, and compute everything in `float32`. The gain's first entry $10^4/(10^4 + 10^{-4})$ rounds to exactly 1, so

$$(I - KH)P^- = \begin{bmatrix} 0 & 0 \\ 9.5 \times 10^{-7} & 2.0 \times 10^{-5} \end{bmatrix},$$

which is not symmetric, has a zero variance where the true value is $10^{-4}$, and whose symmetrized version has the eigenvalue $-1.1 \times 10^{-8} < 0$. The Joseph form gives $\begin{bmatrix} 1.000 \times 10^{-4} & 9.99 \times 10^{-8} \\ 9.99 \times 10^{-8} & 1.999 \times 10^{-5} \end{bmatrix}$, positive definite and equal to the exact posterior to four digits. The first diagonal entry shows why: the Joseph form computes $(1 - K_1)^2P_{11}^- + K_1^2R = 0 + R$, so the measurement information enters as a positive term instead of as the tiny difference of two large ones.

**12.4** Only the covariances can be continued, since they do not depend on measurements.

With $P_k^+ = 2P_k^-/(P_k^- + 2)$ and $P_{k+1}^- = P_k^+ + 1$:

| $k$ | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|---|
| $P_k^-$ | 5 | 2.4286 | 2.0968 | 2.0236 | 2.0059 | 2.0015 | 2.0004 |
| $K_k$ | 0.714 | 0.548 | 0.512 | 0.503 | 0.501 | 0.500 | 0.500 |

$P_k^- \to 2$, and the distance to the limit shrinks by a factor of about four per step: the derivative of the Riccati map at its fixed point is $\big(R/(P_\infty^- + R)\big)^2 = (2/4)^2 = \frac{1}{4}$.

**12.5** At steady state $P = Pr/(P+r)+q$ for $P = P_\infty^-$. Multiplying by $P+r$: $P^2+Pr = Pr+qP+qr$, i.e. $P^2 - qP - qr = 0$, whose positive root is

$$P_\infty^- = \tfrac{1}{2}\big(q + \sqrt{q^2 + 4qr}\big), \qquad K_\infty = \frac{P_\infty^-}{P_\infty^- + r}, \qquad P_\infty^+ = \frac{P_\infty^- r}{P_\infty^- + r} = P_\infty^- - q.$$

For $q/r \to 0$: $P_\infty^- \approx \sqrt{qr}$ and $K_\infty \approx \sqrt{q/r} \to 0$. The state barely moves, so the filter averages about $\sqrt{r/q}$ measurements and its error $\sqrt{qr}$ is much smaller than the sensor noise. For $q/r \to \infty$: $P_\infty^- \approx q + r$ and $K_\infty \to 1$. The state moves so much between measurements that each new one is nearly all the information; the filter follows the measurements, and $P_\infty^+ \to r$.

**12.6** The implementation of Algorithm 2 on the model of Figure 12.1 (constant velocity, $\Delta t = 0.1$ s, acceleration density $\sqrt{0.05}$, position noise variance 1, prior $\mathrm{diag}(4, 4)$) reproduces the figure. In the 200 steps of the figure's run no position error leaves the $\pm 3\sigma$ envelope. One run says little, since the expected number is $200 \times 0.27\% \approx 0.5$; over 1000 independent runs the fraction is 0.29%, in agreement with the 0.27% of a Gaussian with the correct variance.

**12.7** For the normalized innovations $\nu_k = r_k/\sqrt{S_k}$ of a long run (5000 steps, the first 50 discarded), the sample autocorrelation $\hat\rho(\ell) = \sum_k \nu_k \nu_{k+\ell} / \sum_k \nu_k^2$ should lie within $\pm 1.96/\sqrt{N} \approx \pm 0.028$ at every lag $\ell \geq 1$ if the innovations are white:

| filter | $\hat\rho(1), \ldots, \hat\rho(5)$ | mean NIS |
|---|---|---|
| correct $Q$ | 0.00, 0.02, −0.01, 0.01, 0.02 | 1.01 |
| $Q/100$ | 0.44, 0.45, 0.43, 0.44, 0.44 | 1.85 |
| $100\,Q$ | −0.11, −0.08, −0.09, −0.07, −0.05 | 0.91 |

With too little process noise the filter trusts its model too much and lags behind the true motion, so consecutive innovations share the same sign (strong positive correlation, and an NIS well above 1). With too much process noise it overreacts to each measurement and partly corrects back at the next one (negative correlation). The whiteness test detects both, without ground truth.

Chapter 13

# Nonlinear Filtering

**In this chapter**

- Derive the extended Kalman filter by linearization, and identify every approximation it makes.
- Understand the iterated EKF as Gauss–Newton.
- Understand the unscented transform and the unscented Kalman filter.
- Understand particle filters and why they do not scale to VIO.
- Know why VIO filters are EKFs, and what that implies for how they must be designed.

Real systems are nonlinear: rotations enter through trigonometric functions, projections divide by depth. A Gaussian pushed through a nonlinear function is no longer Gaussian (Section 5.10), so the exact Bayes filter of Chapter 12 no longer has a finite-dimensional form. This chapter presents the three main families of approximations. The extended Kalman filter, the basis of this project, is treated in detail; the others are presented so that the choice is understood.

## 13.1 The extended Kalman filter

### 13.1.1 The model

A nonlinear discrete-time model reads

$$x_k = f(x_{k-1}, u_k, w_k), \qquad z_k = h(x_k) + n_k, \tag{13.1}$$

with known input $u_k$ (an IMU reading, for instance), process noise $w_k \sim \mathcal{N}(0, Q_k)$ and measurement noise $n_k \sim \mathcal{N}(0, R_k)$.

### 13.1.2 Derivation

The *extended Kalman filter* (EKF) applies the Kalman filter to a linearization of the model about the current estimate.

**Prediction.** Expand $f$ to first order around the previous estimate and zero noise:

$$x_k \approx f(\hat{x}^+_{k-1}, u_k, 0) + F_k\,(x_{k-1} - \hat{x}^+_{k-1}) + L_k w_k, \qquad F_k = \left.\frac{\partial f}{\partial x}\right|_{\hat{x}^+_{k-1}}, \quad L_k = \left.\frac{\partial f}{\partial w}\right|_{\hat{x}^+_{k-1}}. \tag{13.2}$$

Taking the mean and covariance of the right-hand side (Proposition 5.7):

$$\hat{x}_k^- = f(\hat{x}_{k-1}^+, u_k, 0), \qquad P_k^- = F_k P_{k-1}^+ F_k^\mathsf{T} + L_k Q_k L_k^\mathsf{T}. \tag{13.3}$$

The mean is propagated through the *nonlinear* function, the covariance through its Jacobian.

**Update.** Expand $h$ around the prediction, $h(x_k) \approx h(\hat{x}_k^-) + H_k(x_k - \hat{x}_k^-)$ with $H_k = \partial h/\partial x|_{\hat{x}_k^-}$, and apply the linear update with the innovation computed from the nonlinear prediction:

$$\begin{aligned} r_k &= z_k - h(\hat{x}_k^-), & S_k &= H_k P_k^- H_k^\mathsf{T} + R_k, & K_k &= P_k^- H_k^\mathsf{T} S_k^{-1}, \\ \hat{x}_k^+ &= \hat{x}_k^- + K_k r_k, & P_k^+ &= (I - K_k H_k) P_k^- (I - K_k H_k)^\mathsf{T} + K_k R_k K_k^\mathsf{T}. \end{aligned} \tag{13.4}$$

### 13.1.3 What the EKF gets wrong

Every step above is exact for linear models. For nonlinear models the EKF makes three approximations:

1. *Gaussianity*: the true prior and posterior are not Gaussian, but are represented by a mean and a covariance.
2. *Mean bias*: the predicted mean is $f(\hat{x})$, not $\mathbb{E}[f(x)]$. By Section 5.10 the difference is about $\frac{1}{2}\sum_i e_i \operatorname{tr}(\nabla^2 f_i\, P)$, proportional to the curvature times the covariance.
3. *Covariance error*: $FPF^\mathsf{T}$ ignores higher-order terms, and the Jacobians are evaluated at the *estimate*, not at the unknown true state.

All three errors grow with the size of the uncertainty relative to the scale over which the functions curve. When errors are small, the EKF is excellent; when they are large, it can be badly wrong, and in particular it can become *inconsistent*: report a covariance smaller than its actual errors. The third approximation has a subtle long-term consequence in VIO, a spurious gain of information about unobservable directions (Chapter 29).

### 13.1.4 The iterated EKF

By Proposition 10.2, the EKF update is one Gauss–Newton step on the MAP cost $\frac{1}{2}\|x - \hat{x}^-\|^2_{(P^-)^{-1}} + \frac{1}{2}\|z - h(x)\|^2_{R^{-1}}$, linearized at the prior mean. When the measurement function is strongly nonlinear, that single step can be inaccurate. The *iterated EKF* (IEKF) repeats it, re-linearizing at the latest iterate $x^{(i)}$ while keeping the prior term:

$$x^{(i+1)} = \hat{x}^- + K^{(i)}\big(z - h(x^{(i)}) - H^{(i)}(\hat{x}^- - x^{(i)})\big), \qquad K^{(i)} = P^- H^{(i)\mathsf{T}}\big(H^{(i)} P^- H^{(i)\mathsf{T}} + R\big)^{-1}, \tag{13.5}$$

with $H^{(i)}$ evaluated at $x^{(i)}$ and $x^{(0)} = \hat{x}^-$. The first iteration is the EKF. The covariance is computed with the last Jacobian. Iteration helps when the measurement is very informative relative to the prior, so that the posterior lies far from the prior mean, where the first linearization is poor.

## 13.2 Sigma-point filters

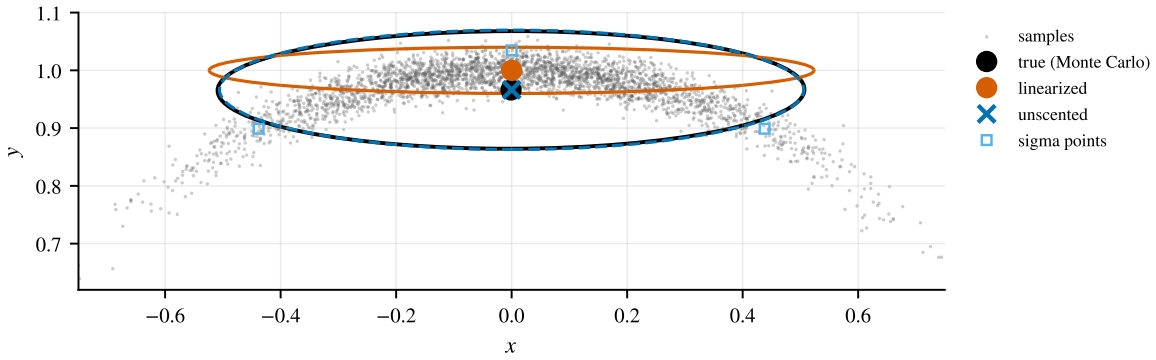



**Figure 13.1:** A range-bearing measurement converted to Cartesian coordinates, with $\sigma_r = 0.02$ and $\sigma_\phi = 15°$. Monte Carlo samples of the true distribution (dots), its true mean and covariance (black), the linearized approximation (orange), and the unscented transform (blue, dashed), with the five sigma points; ellipses are $2\sigma$. Linearization places the mean on the circle, where it should not be; the unscented transform recovers the inward shift of the mean and a better covariance.

### 13.2.1 The unscented transform

Linearization approximates the *function*. The *unscented transform* approximates the *distribution* instead, by a small set of deterministically chosen *sigma points* that have the right mean and covariance, and pushes each point through the exact nonlinear function.

For $x \in \mathbb{R}^n$ with mean $\mu$ and covariance $P = LL^\mathsf{T}$ (Cholesky), choose $\lambda = \alpha^2(n + \kappa) - n$ and the $2n + 1$ points

$$\chi_0 = \mu, \qquad \chi_i = \mu + \sqrt{n + \lambda}\,\ell_i, \qquad \chi_{n+i} = \mu - \sqrt{n + \lambda}\,\ell_i, \qquad i = 1, \dots, n, \tag{13.6}$$

where $\ell_i$ is the $i$-th column of $L$, with weights

$$W_0^{(m)} = \frac{\lambda}{n + \lambda}, \quad W_0^{(c)} = \frac{\lambda}{n + \lambda} + (1 - \alpha^2 + \beta), \quad W_i^{(m)} = W_i^{(c)} = \frac{1}{2(n + \lambda)}. \tag{13.7}$$

Propagate $\gamma_i = f(\chi_i)$ and recombine:

$$\bar{y} = \sum_i W_i^{(m)} \gamma_i, \qquad P_y = \sum_i W_i^{(c)} (\gamma_i - \bar{y})(\gamma_i - \bar{y})^\mathsf{T}. \tag{13.8}$$

The points are placed symmetrically along the principal axes of the uncertainty, so the weighted points reproduce $\mu$ and $P$ exactly. Expanding $f$ in a Taylor series about $\mu$ shows that $\bar{y}$ captures the second-order (curvature) term of the mean that linearization misses, and that $P_y$ is correct to second order, without computing any derivatives. The parameters $\alpha$, $\beta$, $\kappa$ control the spread of the points ($\beta = 2$ is optimal for Gaussians).

### 13.2.2 The unscented Kalman filter

The *unscented Kalman filter* (UKF) uses the unscented transform for both steps. Prediction: generate sigma points from $(\hat{x}^+, P^+)$, propagate them through $f$, and recombine into $(\hat{x}^-, P^-)$,

adding $Q$. Update: generate sigma points from $(\hat{x}^-, P^-)$, push them through $h$ to get the predicted measurement $\bar{z}$ and its covariance $S$ (adding $R$), and the cross-covariance $P_{xz} = \sum_i W_i^{(c)}(\chi_i - \hat{x}^-)(\gamma_i - \bar{z})^\mathsf{T}$; then $K = P_{xz}S^{-1}$, $\hat{x}^+ = \hat{x}^- + K(z - \bar{z})$ and $P^+ = P^- - KSK^\mathsf{T}$. These are the LMMSE formulas of Theorem 9.9 with moments estimated by the sigma points rather than by linearization. On manifolds, sigma points are generated in the tangent space and mapped with $\boxplus$, and their mean is computed iteratively as in Chapter 8.

The UKF costs about $2n + 1$ evaluations of $f$ and $h$ per step instead of Jacobians, which is attractive when Jacobians are hard to derive. For VIO with a 75-dimensional state, the 151 propagations of the full state per IMU sample are expensive, and the accuracy gain over a well-designed error-state EKF is small, because the error-state formulation already keeps the nonlinearity mild.

## 13.3 Particle filters

A *particle filter* represents the posterior by $N$ weighted samples (particles) $\{x^{(j)}, w^{(j)}\}$, which can represent any distribution, multi-modal ones included. The basic *sequential importance resampling* (SIR) algorithm:

1. *Predict*: move each particle through the dynamics with a random noise sample, $x_k^{(j)} = f(x_{k-1}^{(j)}, u_k, w^{(j)})$.
2. *Weight*: multiply each weight by the likelihood of the measurement, $w^{(j)} \leftarrow w^{(j)} p(z_k \mid x_k^{(j)})$, and normalize.
3. *Resample*: when the effective sample size $N_{\text{eff}} = 1/\sum_j (w^{(j)})^2$ falls too low, draw $N$ new particles with probabilities $w^{(j)}$ and reset the weights to $1/N$, so that particles concentrate where the posterior mass is.

Particle filters are exact as $N \to \infty$ and excel at low-dimensional problems with multi-modal posteriors, such as localizing a robot in a known map. Their weakness is dimension: the number of particles needed to cover a distribution grows roughly exponentially with the state dimension. For the 15 to 75 dimensions of VIO they are impractical, except in hybrid forms that sample only a few variables.

## 13.4 Why VIO uses the EKF

| | EKF | UKF | particle filter |
|---|---|---|---|
| cost per step | Jacobians, $O(n^3)$ | $2n + 1$ propagations, $O(n^3)$ | $N$ propagations, $N$ huge for large $n$ |
| derivatives needed | yes | no | no |
| non-Gaussian posteriors | no | no | yes |
| accuracy for small errors | excellent | excellent | good (noisy) |
| used in VIO | MSCKF, OpenVINS, ROVIO (iterated) | rarely | no |

Visual-inertial odometry has a high-dimensional state, a fast prediction rate (hundreds of Hz), and uncertainties that, once the filter is initialized, are small compared with the curvature of its models. Those are exactly the conditions under which the EKF is accurate and the alternatives are expensive. The design principle that makes this work is to keep the linearized errors small: estimate the *error* of a nominal state that absorbs the large nonlinear motion, and reset it after every correction. That is the error-state Kalman filter of the next chapter.

**Key takeaways**

- The EKF propagates the mean through the nonlinear model and the covariance through its Jacobians, evaluated at the estimate.
- Its errors (non-Gaussianity, mean bias, covariance error, estimate-dependent Jacobians) grow with uncertainty relative to curvature.
- The iterated EKF is Gauss–Newton on the MAP cost; it helps when measurements are very informative.
- The unscented transform propagates sigma points through the exact function and captures second-order effects without derivatives.
- Particle filters handle any distribution but scale exponentially with dimension.
- VIO uses EKFs with small, frequently reset errors: the error-state formulation.

## Exercises

**13.1** Write the EKF for a planar robot with state $(x, y, \psi)$ driven by speed and turn rate and measured by range to a known beacon. Identify where linearization error enters.

**13.2** Reproduce Figure 13.1. Increase $\sigma_\phi$ until the linearized mean lies outside the $1\sigma$ ellipse of the true distribution.

**13.3** Show that the unscented transform reproduces the mean and covariance exactly for a linear function.

**13.4** Show that for a scalar $x \sim \mathcal{N}(\mu, \sigma^2)$ and $f(x) = x^2$, the unscented transform with $n = 1$, $\kappa = 2$, $\alpha = 1$ gives the exact mean $\mu^2 + \sigma^2$.

**13.5** Implement a particle filter for a 1D robot localizing itself from range measurements to two landmarks, and observe a bimodal posterior.

## Solutions to the exercises

**13.1** State $x = (p_x, p_y, \psi)$, inputs $(v, \omega)$ with noise $(n_v, n_\omega)$, beacon at $b = (b_x, b_y)$ with known position.

- *Prediction*: $f(x) = \big(p_x + v\Delta t \cos\psi,\ p_y + v\Delta t \sin\psi,\ \psi + \omega\Delta t\big)$, with Jacobians

$$F = \begin{bmatrix} 1 & 0 & -v\Delta t \sin\hat{\psi} \\ 0 & 1 & v\Delta t \cos\hat{\psi} \\ 0 & 0 & 1 \end{bmatrix}, \qquad L = \begin{bmatrix} \Delta t \cos\hat{\psi} & 0 \\ \Delta t \sin\hat{\psi} & 0 \\ 0 & \Delta t \end{bmatrix},$$

  and $P^- = FPF^\mathsf{T} + L\,\mathrm{diag}(\sigma_v^2, \sigma_\omega^2)L^\mathsf{T}$.
- *Update*: $h(x) = \rho = \|p - b\|$, $H = \big[(\hat{p}_x - b_x)/\hat{\rho},\ (\hat{p}_y - b_y)/\hat{\rho},\ 0\big]$, then the standard update.

Linearization error enters in three places. (i) In the prediction through $\cos\psi$ and $\sin\psi$: with a large heading uncertainty the predicted positions spread along an arc, the banana of Figure 5.4, which $FPF^\mathsf{T}$ approximates by an ellipse. (ii) In the update through the curvature of the range: $\nabla^2 h$ has the eigenvalue $1/\rho$ in the direction perpendicular to the line of sight, so the neglected second-order term is about $\sigma_\perp^2/(2\rho)$, harmless far from the beacon and large close to it (and $H$ is undefined at $\rho = 0$). (iii) In the heading: the range does not depend on $\psi$ ($H_\psi = 0$), so the heading is corrected only through the position-heading correlation that motion builds in $P$, which is itself a linearized quantity. When the heading error is large, those correlations are wrong and the corrections are too.

**13.2** With the figure's $\sigma_r = 0.02$, the true distribution of $(x, y) = (r\cos\phi, r\sin\phi)$ for $\phi \sim \mathcal{N}(\pi/2, \sigma_\phi^2)$ has mean $(0, e^{-\sigma_\phi^2/2})$ and $\mathrm{Var}(y) = (1 + \sigma_r^2)(1 + e^{-2\sigma_\phi^2})/2 - e^{-\sigma_\phi^2}$, while linearization predicts the mean $(0, 1)$. The covariance is diagonal by symmetry, so the Mahalanobis distance of the linearized mean is $d = (1 - e^{-\sigma_\phi^2/2})/\sqrt{\mathrm{Var}(y)}$:

| $\sigma_\phi$ | 15° | 30° | 45° | 60° | 75° | 90° |
|---|---|---|---|---|---|---|
| $d$ | 0.67 | 0.75 | 0.81 | 0.90 | 0.99 | 1.10 |

The linearized mean leaves the $1\sigma$ ellipse at $\sigma_\phi \approx 76°$ (confirmed by Monte Carlo). Notice that it never gets very far: in the small-angle regime $d^2 \approx (\sigma_\phi^4/4)/(\sigma_r^2 + \sigma_\phi^4/2) < \frac{1}{2}$, because the true distribution spreads along the arc as fast as its mean moves inward. The more telling failure is the shape: the true distribution is a thin curved arc, and the linearized ellipse puts most of its probability where the true one has none.

**13.3** For $f(x) = Ax + b$ the transformed sigma points are $y_0 = A\mu + b$ and $y_i, y_{n+i} = A\mu + b \pm \sqrt{n + \lambda}\, A\ell_i$. The mean weights sum to one ($\frac{\lambda}{n+\lambda} + \frac{2n}{2(n+\lambda)} = 1$) and the $\pm$ pairs cancel, so $\bar{y} = \sum_i W_i^{(m)} y_i = A\mu + b$. In the covariance the central point contributes nothing ($y_0 - \bar{y} = 0$, so the value of $W_0^{(c)}$ and of $\beta$ is irrelevant), and each pair contributes $2 \cdot \frac{1}{2(n+\lambda)}(n + \lambda) A\ell_i \ell_i^\mathsf{T} A^\mathsf{T}$:

$$\sum_i W_i^{(c)} (y_i - \bar{y})(y_i - \bar{y})^\mathsf{T} = A\Big(\sum_{i=1}^{n} \ell_i \ell_i^\mathsf{T}\Big) A^\mathsf{T} = ALL^\mathsf{T}A^\mathsf{T} = APA^\mathsf{T}.$$

The unscented transform is exact for linear functions, as it must be to be consistent with the Kalman filter.

**13.4** With $n = 1$, $\kappa = 2$ and $\alpha = 1$: $\lambda = 1 \cdot 3 - 1 = 2$, $n + \lambda = 3$, sigma points $\mu$ and $\mu \pm \sqrt{3}\,\sigma$, weights $W_0^{(m)} = \frac{2}{3}$ and $W_{1,2}^{(m)} = \frac{1}{6}$. For $f(x) = x^2$,

$$\tfrac{2}{3}\mu^2 + \tfrac{1}{6}\big((\mu + \sqrt{3}\sigma)^2 + (\mu - \sqrt{3}\sigma)^2\big) = \tfrac{2}{3}\mu^2 + \tfrac{1}{6}\big(2\mu^2 + 6\sigma^2\big) = \mu^2 + \sigma^2 = \mathbb{E}[x^2],$$

exactly, whereas linearization gives $\mu^2$. (The choice $\kappa = 3 - n$ also makes the sigma points reproduce the fourth moment $3\sigma^4$ of a scalar Gaussian: $\frac{1}{6} \cdot 2 \cdot 9\sigma^4 = 3\sigma^4$.)

**13.5** A simple model that produces bimodality: landmarks at 0 and 10 on a line, and a sensor that reports the range to the *nearest* landmark without saying which one it is ($z = \min(|x|, |x - 10|) + n$, $\sigma_z = 0.1$). The robot starts at $x = 2$ with a uniform prior on $[0, 10]$ and then moves right by 0.5 per step (odometry noise 0.05). A bootstrap particle filter with 2000 particles: propagate each particle with the odometry plus sampled noise, multiply its weight by the likelihood $\exp(-(z - h(x_i))^2/2\sigma_z^2)$, normalize, and resample when the effective sample size $1/\sum_i w_i^2$ drops below $N/2$. After the first measurement ($z = 1.87$) the posterior has two equal modes, near 1.9 and near 8.1 (weights 0.52 and 0.48), symmetric about 5; its mean, 4.9, is a place where the robot certainly is not, which is what a Gaussian filter would report. After the first move the mirror hypothesis predicts a range of about 1.4 (it approaches the landmark at 10) while the measurement says 2.3; its weight drops to zero and the filter tracks the true position from then on. A Kalman-type filter cannot represent the bimodal stage at all: it would either lock onto one mode, possibly the wrong one, or average them.

Chapter 14

# The Error-State Kalman Filter

**In this chapter**

- Understand the three-way split into true, nominal and error state, and why it is the right way to filter on a manifold.
- Derive the linearized error dynamics with a mechanical recipe.
- Define measurement residuals and Jacobians on the manifold with the correct sign convention.
- Derive the injection and reset steps, including the reset Jacobian $G$.
- Assemble the complete error-state Kalman filter loop, and follow it through a complete attitude-estimation example.

## 14.1 Filtering on a manifold

The EKF of Chapter 13 assumes the state lives in $\mathbb{R}^n$, so that $\hat{x} + Kr$ makes sense. For VIO, the state contains a rotation, which does not live in a vector space (Chapter 8). Three quantities must therefore be distinguished.

**Definition 14.1** (True, nominal and error state).

- The **true state** $x$ is the unknown physical state, a point on the state manifold $\mathcal{M}$.
- The **nominal state** $\hat{x} \in \mathcal{M}$ is the current best estimate, propagated with the full nonlinear model and no noise.
- The **error state** $\delta x = x \boxminus \hat{x} \in \mathbb{R}^n$ is the small, minimal-dimension difference, defined with the operators of Section 8.9.

The filter's Gaussian belief is over the error state: $\delta x \sim \mathcal{N}(\delta\hat{x}, P)$, so that $x = \hat{x} \boxplus \delta x$.

For the IMU state this means 16 nominal numbers (quaternion included) but a 15-dimensional error and a $15 \times 15$ covariance, with no redundant directions and no constraints. The Kalman filter operates only on the error state, which is a vector, so all of Chapter 12 applies to it. This design is called the *error-state Kalman filter* (ESKF), or *indirect* Kalman filter. In aerospace the same idea for attitude is the *multiplicative* EKF.

**Key idea: why the error state**

- **Minimal and unconstrained.** The error has exactly as many components as degrees of freedom, so its covariance is non-singular and needs no constraint handling.
- **Always near the origin.** After every update the error is reset to zero, so it never approaches the singularities of three-parameter rotations, and the small-angle

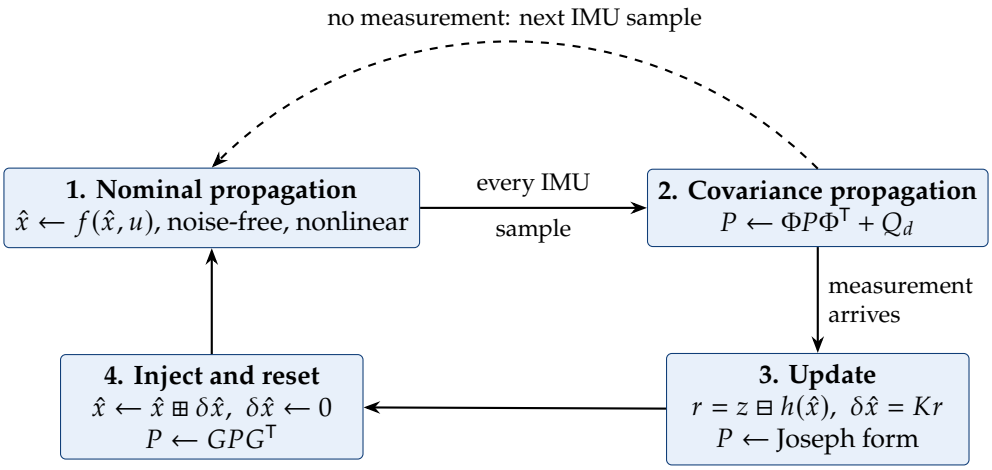



**Figure 14.1:** The error-state Kalman filter cycle. The error-state mean is zero throughout propagation, so only the covariance is propagated in step 2. It becomes non-zero in step 3 and is transferred to the nominal state and zeroed in step 4.

approximations used to derive its dynamics remain valid.

- **Nearly linear.** The large, fast, nonlinear motion is carried by the nominal state, which is integrated exactly. The error evolves slowly and is small, so its dynamics are almost linear and linearization is accurate (Chapter 13).
- **Slow.** Error dynamics are governed by sensor errors, not by vehicle motion, so the covariance could even be propagated at a lower rate than the nominal state if computation were scarce.

## 14.2 The ESKF cycle

Figure 14.1 shows the four steps.

1. **Nominal propagation.** At each IMU sample, integrate the nonlinear kinematics with the measured inputs, ignoring noise (Chapter 16).
2. **Error covariance propagation.** Propagate $P$ with the linearized error dynamics (Chapter 17).
3. **Update.** When a measurement arrives, compute the residual and its Jacobian on the manifold, and compute the Kalman estimate of the error, $\delta\hat{x} = Kr$, and the posterior covariance.
4. **Injection and reset.** Move the estimated error into the nominal state with $\boxplus$, set the error mean back to zero, and correct the covariance for the change of reference point.

**Proposition 14.2** (The error mean needs no propagation). *If $\delta\hat{x} = 0$ after a reset, and the error obeys linear dynamics $\dot{\delta x} = F_c \delta x + G_c w$ with zero-mean noise, then $\mathbb{E}[\delta x] = 0$ until the next update.*

*Proof.* The mean obeys $\frac{\mathrm{d}}{\mathrm{d}t}\mathbb{E}[\delta x] = F_c\, \mathbb{E}[\delta x]$ (Proposition 6.5) with initial value zero, whose unique solution is zero. ∎

This is why step 2 propagates only the covariance: all the knowledge of the error state's mean has been transferred into the nominal state.

## 14.3 Linearized error dynamics: the recipe

Suppose the true state obeys $\dot{x} = f(x, u, w)$ with noise $w$, and the nominal state obeys $\dot{\hat{x}} = f(\hat{x}, u, 0)$. The error dynamics are derived in four mechanical steps.

1. Write the true dynamics block by block.
2. Substitute $x = \hat{x} \boxplus \delta x$ in every block. For the attitude, $R = \hat{R}\,\mathrm{Exp}(\delta\theta)$ (or $\mathrm{Exp}(\delta\theta)\hat{R}$ for a global perturbation).
3. Subtract the nominal dynamics.
4. Keep only terms of first order in the small quantities ($\delta x$ and $w$), using $\mathrm{Exp}(\delta\theta) \approx I + [\delta\theta]_\times$ and dropping their products.

The result is a linear time-varying system

$$\dot{\delta x} = F_c(\hat{x}, u)\,\delta x + G_c(\hat{x})\,w, \tag{14.1}$$

which Section 11.2 turns into $\Phi$ and $Q_d$. The attitude block needs the time derivative of the perturbation itself, worked out in Lemma 17.1. Section 14.7 applies the recipe to a complete small filter, and Chapter 17 to the inertial navigation equations.

## 14.4 Measurement updates on the manifold

Let a sensor produce a measurement $z$ on a manifold $\mathcal{Z}$ (a vector space, SO(3), a pose, ...) according to the generative model

$$z = h(x) \boxplus n, \qquad n \sim \mathcal{N}(0, R_z). \tag{14.2}$$

The ESKF compares the measurement with its prediction from the nominal state,

$$r = z \boxminus h(\hat{x}), \tag{14.3}$$

and models how the residual depends on the unknown true error $\delta x$. Substituting $z = h(\hat{x} \boxplus \delta x) \boxplus n$ and linearizing,

$$r \approx H\,\delta x + n, \qquad H = \frac{\partial}{\partial \delta x}\Big[h(\hat{x} \boxplus \delta x) \boxminus h(\hat{x})\Big]_{\delta x = 0}. \tag{14.4}$$

$H$ is the manifold Jacobian of $h$ (Definition 8.7). With $r$ and $H$, the update is the ordinary Kalman update of the error state with prior $\mathcal{N}(0, P)$:

$$S = HPH^\mathsf{T} + R_z, \qquad K = PH^\mathsf{T}S^{-1}, \qquad \delta\hat{x} = Kr, \qquad P^+ = (I - KH)P(I - KH)^\mathsf{T} + KR_zK^\mathsf{T}. \tag{14.5}$$

**Pitfall: the sign of $H$**

There are two ways to set up the linearization, and they differ by a sign. The generative view above differentiates the *prediction* with respect to the *true* error: $r \approx +H\delta x$. An optimization view instead writes the residual as a function of a correction $\delta$ to the estimate, $e(\delta) = z \boxminus h(\hat{x} \boxplus \delta)$, whose Jacobian is $-H$ (to first order). Both lead to the same correction if used consistently. Mixing them flips every correction. In this project, $H$ is always (14.4), and its finite-difference test perturbs the nominal state: $r(\delta x) := h(\hat{x} \boxplus \delta x) \boxminus h(\hat{x})$ and $H \approx \partial r / \partial \delta x$.

For a vector-valued measurement, $\boxminus$ is subtraction and this reduces to the EKF. For a rotation-valued measurement such as the pose measurement of Milestone 6, the attitude part of the residual is $\mathrm{Log}_q(\hat{q}^{-1} \otimes q_{meas})$ (AGENTS.md F3).

## 14.5 Injection and reset

After the update, the error estimate $\delta\hat{x} = Kr$ is non-zero. Injection moves it into the nominal state:

$$\hat{x}^+ = \hat{x} \boxplus \delta\hat{x} : \quad \hat{p} \leftarrow \hat{p} + \delta\hat{p}, \quad \hat{v} \leftarrow \hat{v} + \delta\hat{v}, \quad \hat{q} \leftarrow \hat{q} \otimes \mathrm{Exp}_q(\delta\hat{\theta}), \quad \hat{b} \leftarrow \hat{b} + \delta\hat{b}, \tag{14.6}$$

followed by normalization of every quaternion that was touched, for the IMU and every clone (AGENTS.md F4).

The error is now defined relative to the new nominal state, $\delta x^+ = x \boxminus \hat{x}^+$, and its mean is zero. But its covariance is not exactly $P^+$, because the reference point of the tangent space has moved.

**Proposition 14.3** (Reset Jacobian). *Let $\delta x \sim \mathcal{N}(\delta\hat{x}, P^+)$ be the error relative to $\hat{x}$ after the update, and $\delta x^+ = x \boxminus (\hat{x} \boxplus \delta\hat{x})$ the error relative to the injected nominal state. To first order, $\delta x^+ \sim \mathcal{N}(0, GP^+G^\mathsf{T})$ with $G = \partial\delta x^+/\partial\delta x$ evaluated at $\delta\hat{x}$. For the vector blocks $G = I$, and for each attitude block*

$$G_\theta = I - \tfrac{1}{2}[\delta\hat{\theta}]_\times. \tag{14.7}$$

*Proof.* For vector blocks $\delta x^+ = \delta x - \delta\hat{x}$, whose Jacobian is $I$. For the attitude, $q = \hat{q} \otimes \mathrm{Exp}_q(\delta\theta)$ and $q = \hat{q}^+ \otimes \mathrm{Exp}_q(\delta\theta^+)$ with $\hat{q}^+ = \hat{q} \otimes \mathrm{Exp}_q(\delta\hat{\theta})$, so

$$\mathrm{Exp}(\delta\theta^+) = \mathrm{Exp}(-\delta\hat{\theta})\ \mathrm{Exp}(\delta\theta).$$

By the BCH formula (8.13), $\delta\theta^+ = \delta\theta - \delta\hat{\theta} - \frac{1}{2}\,\delta\hat{\theta} \times \delta\theta + \cdots$, whose derivative with respect to $\delta\theta$ is $I - \frac{1}{2}[\delta\hat{\theta}]_\times$. At $\delta\theta = \delta\hat{\theta}$ the value is exactly zero, so the new error has zero mean. Linearizing $\delta x^+$ about $\delta\hat{x}$ and applying Proposition 5.7 gives the covariance. ∎

***Remark* 14.4** (relation to the right Jacobian). The derivative of $\mathrm{Log}(\mathrm{Exp}(-\delta\hat{\theta})\,\mathrm{Exp}(\delta\theta))$ at $\delta\theta = \delta\hat{\theta}$ can be computed exactly with (8.19): it is $J_r(\delta\hat{\theta}) = I - \frac{1}{2}[\delta\hat{\theta}]_\times + O(\|\delta\hat{\theta}\|^2)$. The frozen specification (AGENTS.md F4) uses the first-order form (14.7). For a typical correction of a few milliradians the two differ by about $10^{-6}$ and the difference is irrelevant. Changing it would be a logged convention change, not a silent substitution.

**Algorithm 3** Error-state Kalman filter (one IMU step and an optional update)

**Input:** nominal $\hat{x}$, covariance $P$, IMU sample at $t_k$, optional measurement $z$ at $t_k$

$\Delta t \leftarrow t_k - t_{k-1}$ ▷ from integer nanosecond timestamps
$\hat{x} \leftarrow f(\hat{x}, u_k, \Delta t)$; normalize $\hat{q}$ ▷ nominal propagation
$\Phi \leftarrow I + F_c \Delta t; \quad Q_d \leftarrow G_c Q_c G_c^\mathsf{T} \Delta t$
$P \leftarrow \Phi P \Phi^\mathsf{T} + Q_d; \quad P \leftarrow \frac{1}{2}(P + P^\mathsf{T})$
**if** measurement $z$ available **then**
  $r \leftarrow z \boxminus h(\hat{x}); \quad H \leftarrow \partial[h(\hat{x} \boxplus \delta x) \boxminus h(\hat{x})]/\partial \delta x$
  $S \leftarrow HPH^\mathsf{T} + R_z$; factor $S$; gate on $r^\mathsf{T} S^{-1} r$
  $K \leftarrow PH^\mathsf{T} S^{-1}$ (by solving); $\quad \delta\hat{x} \leftarrow Kr$
  $P \leftarrow (I - KH)P(I - KH)^\mathsf{T} + KR_z K^\mathsf{T}$
  $\hat{x} \leftarrow \hat{x} \boxplus \delta\hat{x}$; normalize quaternions ▷ inject
  $P \leftarrow GPG^\mathsf{T}; \quad P \leftarrow \frac{1}{2}(P + P^\mathsf{T})$ ▷ reset

The covariance reset is therefore

$$P \leftarrow GPG^\mathsf{T}, \qquad G = \operatorname{blkdiag}\left(I_6,\ I - \tfrac{1}{2}[\delta\hat{\theta}]_\times,\ I_6,\ \ldots\right), \tag{14.8}$$

with one $I - \frac{1}{2}[\delta\hat{\theta}_i]_\times$ block for each clone's attitude and identity elsewhere.

**Frozen convention: injection and reset, AGENTS.md F4**

Inject with $\boxplus$ into the IMU block and every clone; normalize every touched quaternion; reset $\delta\hat{x} \leftarrow 0$ and $P \leftarrow GPG^\mathsf{T}$ with $G$ implemented exactly as above. Using $G \approx I$ is a deviation that must be logged.

How much does $G$ matter? It rotates the attitude covariance by half the injected correction, a first-order effect in $\|\delta\hat{\theta}\|$. With small corrections at high rate the effect is tiny, and many implementations use $G = I$. Large corrections (after a long outage, or a loop closure) make it noticeable. It costs almost nothing, and implementing it exactly removes one approximation from the consistency analysis of Milestone 7.

## 14.6 The complete error-state filter

Algorithm 3 assembles the pieces. It is generic: Chapters 16 and 17 supply $f$, $F_c$ and $G_c$ for the IMU, Chapter 18 supplies $h$ and $H$ for a pose sensor, and Chapter 26 supplies them for a camera. When measurements arrive between IMU samples, the filter first propagates to the measurement time by splitting the IMU interval (Chapter 16).

## 14.7 A complete example: attitude estimation

To see every step of Algorithm 3 at work on a problem small enough to follow completely, consider an *attitude and heading reference system* (AHRS) without a magnetometer: estimate the attitude $R = R_{wb}$ of a slowly moving device and the bias $b$ of its gyroscope, using the gyroscope for propagation and the accelerometer as an inclinometer (it measures the reaction to gravity when linear accelerations are small).

To avoid solving the project's own derivation exercise, this example uses the **global** perturbation $R = \mathrm{Exp}(\delta\theta)\hat{R}$, with the error expressed in the world frame. The project's state uses the local perturbation; its forms are the subject of the derivation exercises of Chapter 17 (solutions in Appendix E).

**State and error state.** Nominal $(\hat{R}, \hat{b})$; error $\delta x = (\delta\theta, \delta b) \in \mathbb{R}^6$ with $R = \mathrm{Exp}(\delta\theta)\hat{R}$ and $b = \hat{b} + \delta b$.

**Models.** Gyroscope $\omega_m = \omega + b + n_g$; bias random walk $\dot{b} = n_b$; accelerometer at rest $a_m = R^\mathsf{T} v + n_a$ with $v = -g_w = (0, 0, 9.81)$.

**Nominal propagation.** $\hat{R} \leftarrow \hat{R}\,\mathrm{Exp}\big((\omega_m - \hat{b})\Delta t\big)$, $\hat{b}$ unchanged.

**Error dynamics.** By Example 17.2 (in Chapter 17), $\dot{\delta\theta} = -\hat{R}\,\delta b - \hat{R}\,n_g$, and $\dot{\delta b} = n_b$. Hence

$$F_c = \begin{bmatrix} 0 & -\hat{R} \\ 0 & 0 \end{bmatrix}, \qquad G_c = \begin{bmatrix} -\hat{R} & 0 \\ 0 & I \end{bmatrix}, \qquad Q_c = \mathrm{diag}(\sigma_g^2 I, \sigma_b^2 I). \tag{14.9}$$

**Measurement Jacobian.** $h(x) = R^\mathsf{T} v$. Perturbing, $h(\mathrm{Exp}(\delta\theta)\hat{R}) = \hat{R}^\mathsf{T}\,\mathrm{Exp}(-\delta\theta)v \approx \hat{R}^\mathsf{T}(v - \delta\theta \times v) = \hat{R}^\mathsf{T} v + \hat{R}^\mathsf{T}[v]_\times\,\delta\theta$, so

$$H = \begin{bmatrix} \hat{R}^\mathsf{T}[v]_\times & 0 \end{bmatrix}, \qquad r = a_m - \hat{R}^\mathsf{T} v. \tag{14.10}$$

$[v]_\times$ has rank two: the measurement observes the two components of $\delta\theta$ perpendicular to gravity (roll and pitch) but not the component along it (yaw). It does not observe the bias directly at all.

**Injection and reset.** $\hat{R} \leftarrow \mathrm{Exp}(\delta\hat{\theta})\hat{R}$, $\hat{b} \leftarrow \hat{b} + \delta\hat{b}$. Repeating the reset derivation for the global perturbation, $\mathrm{Exp}(\delta\theta^+) = \mathrm{Exp}(\delta\theta)\,\mathrm{Exp}(-\delta\hat{\theta})$, gives $G_\theta = I + \frac{1}{2}[\delta\hat{\theta}]_\times$: the same magnitude as (14.7), opposite sign.

Figure 14.2 shows the filter on simulated data. Several lessons of this chapter are visible in it. The errors stay inside their $3\sigma$ bounds: the filter is consistent. Tilt becomes accurate within seconds, through the accelerometer. Yaw is unobservable without a magnetometer or vision, so its uncertainty only grows. And the gyro bias, although never measured, is estimated through its correlation with the tilt error it causes: the cross-covariance built by propagation lets the gain correct it. This is exactly how the full VIO filter estimates IMU biases from camera measurements.

**Project link: Milestones 4–6**

M4 implements step 2 of Algorithm 3, M5 steps 3–4, and M6 the update, injection and reset with a pose measurement. Testing them separately localizes bugs: if propagation is exact on synthetic data, and the covariance matches Monte Carlo statistics, then any later inconsistency is in the update.

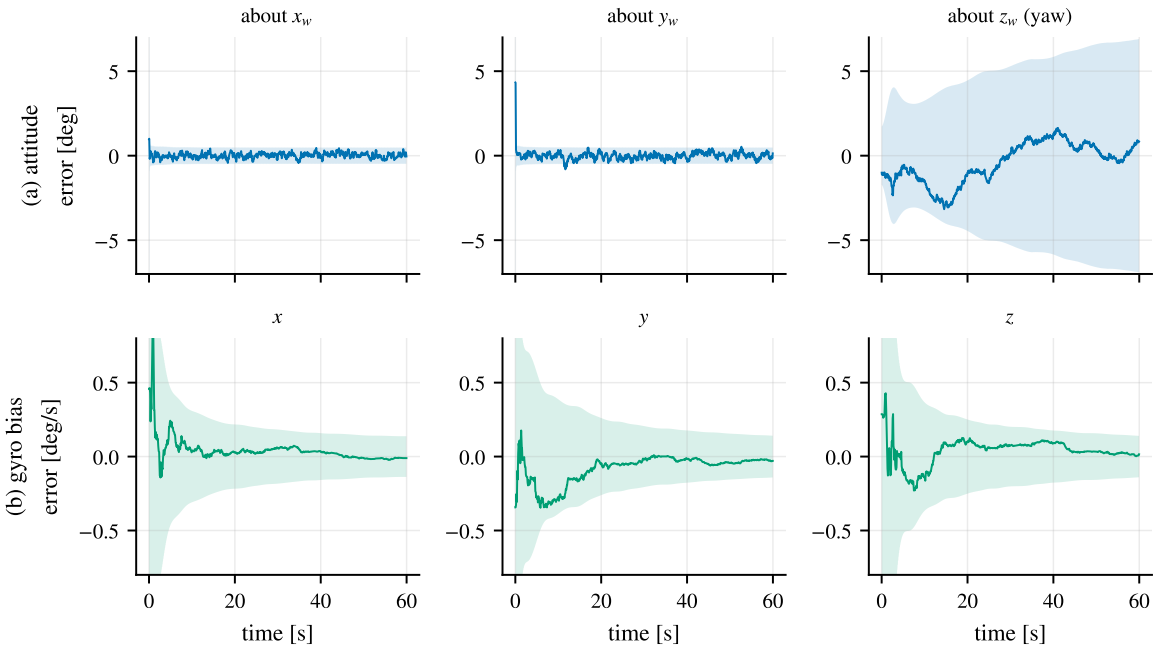



**Figure 14.2:** The attitude ESKF of Section 14.7 on a simulated tumbling device: gyroscope at 100 Hz with a constant bias, accelerometer used as an inclinometer at 10 Hz. (a) Attitude errors about the world axes with their $\pm 3\sigma$ bounds. Tilt (about $x$ and $y$) is quickly bounded by the accelerometer; the error about the vertical (yaw) is unobservable, and its bound grows. (b) Gyro bias errors with $\pm 3\sigma$ bounds. The bias is never measured directly, yet all three components converge, because the device's rotation makes each body axis horizontal at some time.

**Key takeaways**

- The ESKF splits the state into a nonlinear nominal part and a small, minimal, nearly linear error part. The Kalman filter only ever sees the error.
- The error mean is zero during propagation; only $P$ is propagated.
- Residual $r = z \boxminus h(\hat{x}) \approx H\delta x + n$ with $H$ the manifold Jacobian of $h$ at $\hat{x}$.
- After injection, reset $P \leftarrow GPG^\mathsf{T}$ with $G_\theta = I - \frac{1}{2}[\delta\hat{\theta}]_\times$ for every (local) attitude block.
- The attitude example shows observability at work: gravity bounds tilt, yaw drifts, and unmeasured biases are estimated through correlations.

## Exercises

**14.1** Derive the reset Jacobian for the global perturbation $R = \mathrm{Exp}(\delta\theta)\hat{R}$ and confirm $G_\theta = I + \frac{1}{2}[\delta\hat{\theta}]_\times$.

**14.2** Suppose $\delta\hat{\theta} = (0, 0, 0.1)$ rad and $P_{\theta\theta} = \mathrm{diag}(10^{-4}, 10^{-4}, 10^{-2})$. Compute $GP_{\theta\theta}G^\mathsf{T}$ and compare with $J_r(\delta\hat{\theta})P_{\theta\theta}J_r(\delta\hat{\theta})^\mathsf{T}$. When is the difference noticeable?

**14.3** An iterated ESKF repeats the update with $H$ re-evaluated at $\hat{x} \boxplus \delta\hat{x}$. Show that one

iteration is a Gauss–Newton step on the MAP cost $\|\delta x\|^2_{P^{-1}} + \|z \boxminus h(\hat{x} \boxplus \delta x)\|^2_{R_z^{-1}}$.

**14.4** Implement the attitude filter of Section 14.7 and reproduce Figure 14.2. Then hold the device still and observe which bias component stops converging. Explain why.

**14.5** Rewrite the attitude filter with the local perturbation $R = \hat{R}\,\mathrm{Exp}(\delta\theta)$: derive $F_c$, $G_c$, $H$ and $G$. (This is a small version of the project's derivation exercise.)

## Solutions to the exercises

**14.1** With the global perturbation the true attitude is $R = \mathrm{Exp}(\delta\theta)\hat{R}$ before injection and $R = \mathrm{Exp}(\delta\theta^+)\hat{R}^+$ after it, with $\hat{R}^+ = \mathrm{Exp}(\delta\hat{\theta})\hat{R}$. Equating, $\mathrm{Exp}(\delta\theta^+) = \mathrm{Exp}(\delta\theta)\,\mathrm{Exp}(-\delta\hat{\theta})$, and the BCH formula (8.13) gives

$$\delta\theta^+ = \delta\theta - \delta\hat{\theta} - \tfrac{1}{2}\,\delta\theta \times \delta\hat{\theta} + \cdots = \delta\theta - \delta\hat{\theta} + \tfrac{1}{2}\,\delta\hat{\theta} \times \delta\theta + \cdots ,$$

whose derivative with respect to $\delta\theta$ is $G_\theta = I + \frac{1}{2}[\delta\hat{\theta}]_\times$. The sign is opposite to the local case (Proposition 14.3), because the correction now multiplies on the left. (Exactly, the derivative at $\delta\theta = \delta\hat{\theta}$ is $J_l(\delta\hat{\theta})$.)

**14.2** Here $[\delta\hat{\theta}]_\times$ mixes only $x$ and $y$, and $P_{\theta\theta}$ is isotropic in that plane, so both products stay diagonal:

$$\begin{aligned} G P_{\theta\theta} G^\mathsf{T} &= \mathrm{diag}\,(1.0025,\ 1.0025,\ 100) \times 10^{-4}, \\ J_r P_{\theta\theta} J_r^\mathsf{T} &= \mathrm{diag}\,(0.9992,\ 0.9992,\ 100) \times 10^{-4}. \end{aligned}$$

The difference, 0.33% of the $x$ and $y$ variances, is second order: $G$ and $J_r(\delta\hat{\theta}) = I - \frac{1}{2}[\delta\hat{\theta}]_\times + O(\|\delta\hat{\theta}\|^2)$ agree to first order, and their products differ by about $\|\delta\hat{\theta}\|^2/3$. For anisotropic covariances the first-order rotation of the covariance is the same in both, and the relative difference is about $3 \times 10^{-6}$, $3 \times 10^{-4}$, 3% and 40% for corrections of 0.003, 0.03, 0.3 and 1 rad. It is negligible for the milliradian corrections of a running filter and noticeable only after very large corrections, such as the first updates after a poor initialization.

**14.3** Let $\delta x$ be the error-state variable with prior $\mathcal{N}(0, P)$ in the tangent space at $\hat{x}$, and $r(\delta x) = z \boxminus h(\hat{x} \boxplus \delta x)$, so that the MAP cost is $F(\delta x) = \|\delta x\|^2_{P^{-1}} + \|r(\delta x)\|^2_{R_z^{-1}}$. Near an iterate $\delta x_i$, $r(\delta x) \approx r_i - H_i(\delta x - \delta x_i)$ with $r_i = r(\delta x_i)$ and $H_i$ the manifold Jacobian of $h$ at $\hat{x} \boxplus \delta x_i$. Minimizing the resulting quadratic gives the Gauss–Newton iterate (the algebra of Exercise 10.7 with $\mu = 0$)

$$\delta x_{i+1} = K_i\big(r_i + H_i\,\delta x_i\big), \qquad K_i = P H_i^\mathsf{T}\big(H_i P H_i^\mathsf{T} + R_z\big)^{-1}.$$

From $\delta x_0 = 0$ the first iterate is $\delta x_1 = K_0 r(0)$ with $H_0$ evaluated at $\hat{x}$: exactly the ESKF update $\delta\hat{x} = Kr$. One ESKF update is therefore one Gauss–Newton step on the MAP cost; the iterated ESKF re-evaluates $h$ and $H$ at $\hat{x} \boxplus \delta x_i$ and repeats, then injects the final $\delta x$ and resets once.

**14.4** The code of Figure 14.2 is `fig_ahrs` in `scripts/figures_extra.py`. With the tumbling motion all three bias errors converge, ending with standard deviations of about $8 \times 10^{-4}$ rad/s and errors within them. Holding the device still and level (zero rate) instead, the two horizontal components still converge ($\sigma \approx 6.5 \times 10^{-4}$ rad/s, errors consistent with it), but the vertical component, along the measured gravity, does not: its error stays near its initial 0.01 rad/s. A bias about the vertical integrates into a yaw error, and an inclinometer cannot see yaw; to first order that bias is unobservable. Under rotation, every body axis is horizontal at some time, and a bias about a horizontal axis produces a tilt that the accelerometer does see. (The filter's own $\sigma$ for the vertical

component nevertheless shrinks to about 0.004 rad/s, so its error sits near $2.7\sigma$. With the bias unobservable the yaw estimate drifts far from the truth, 0.3 rad in a minute, and Jacobians evaluated at that drifting estimate inject information the data do not contain. Evaluated at the true attitude, the same filter's error is consistent with its $\sigma$. This is a first encounter with the mechanism analyzed in Chapter 29.)

**14.5** With $R = \hat{R}\,\mathrm{Exp}(\delta\theta)$, $\hat{\omega} = \omega_m - \hat{b}$ and $\omega = \omega_m - b - n_g = \hat{\omega} - \delta b - n_g$, Lemma 17.1 applied to $\dot{R} = R[\omega]_\times$ gives, to first order, $\dot{\delta\theta} = -[\hat{\omega}]_\times\delta\theta - \delta b - n_g$; and $\dot{\delta b} = n_b$. Hence

$$F_c = \begin{bmatrix} -[\hat{\omega}]_\times & -I \\ 0 & 0 \end{bmatrix}, \qquad G_c = \begin{bmatrix} -I & 0 \\ 0 & I \end{bmatrix}.$$

For the inclinometer, $h = R^\mathsf{T} v$, and the inverse-action row of Table 8.1 gives

$$h(\hat{R}\,\mathrm{Exp}(\delta\theta)) \approx \hat{R}^\mathsf{T} v + [\hat{R}^\mathsf{T} v]_\times\,\delta\theta, \qquad \text{so} \qquad H = \begin{bmatrix} [\hat{R}^\mathsf{T} v]_\times & 0 \end{bmatrix}.$$

The reset is $G = \mathrm{blkdiag}\left(I - \frac{1}{2}[\delta\hat{\theta}]_\times,\ I\right)$ (Proposition 14.3). Compared with the global version of Section 14.7, the heading-dependent $\hat{R}$ has disappeared from $F_c$ and $G_c$ and moved into $H$, and the error is coupled to the rotation through $-[\hat{\omega}]_\times$: a body-frame error appears to rotate backwards as the body turns. These are exactly the attitude rows of the project's $F_c$ and $G_c$.

Part III

# Inertial Navigation

Chapter 15

# Inertial Sensors and Their Errors

**In this chapter**

- Understand how MEMS accelerometers and gyroscopes work, from Newton's law and the Coriolis effect.
- Understand specific force: what an accelerometer measures, and why it reads $+g$ at rest.
- State the IMU measurement model of the project, and the fuller error model of which it is a simplification.
- Know how IMUs are calibrated and how their noise parameters are measured and tuned.
- Convert between continuous-time noise densities, discrete per-sample noise, and datasheet units.

## 15.1 How a MEMS accelerometer works

A MEMS (micro-electro-mechanical system) *accelerometer* is a tiny proof mass, a few micrograms of silicon, suspended on silicon springs inside a case, with capacitive electrodes that measure its displacement relative to the case.

### 15.1.1 The spring-mass model

Let the case have acceleration $a$ along the sensitive axis, let $g$ be the component of gravitational acceleration along that axis, and let $x$ be the displacement of the mass relative to the case. The absolute acceleration of the mass is $a + \ddot{x}$, and the forces on it are the spring, the damper and gravity (Figure 15.1). Newton's law gives

$$m(a + \ddot{x}) = -kx - c\dot{x} + mg \quad \Longrightarrow \quad \ddot{x} + 2\zeta\omega_n\dot{x} + \omega_n^2 x = -(a - g), \tag{15.1}$$

with natural frequency $\omega_n = \sqrt{k/m}$ and damping ratio $\zeta = c/(2\sqrt{km})$. At frequencies well below $\omega_n$ the derivative terms are negligible and

$$x \approx -\frac{a - g}{\omega_n^2}. \tag{15.2}$$

The deflection measures $a - g$, not $a$. Its frequency response, the ratio of $x$ to $-(a - g)/\omega_n^2$ for a sinusoidal input at angular frequency $\omega$, is $1/(1 - (\omega/\omega_n)^2 + 2i\zeta\omega/\omega_n)$: flat below the resonance, peaked at it for small damping, falling off above it (Figure 15.2). MEMS accelerometers resonate in the kHz range, and their electronics low-pass filter the output well below that, which also serves as the anti-aliasing filter (Chapter 6).

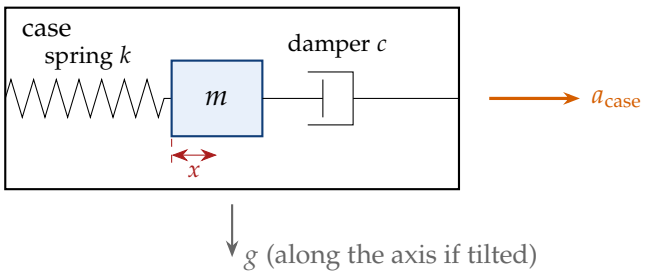



**Figure 15.1:** The spring-mass-damper model of an accelerometer. The displacement $x$ of the proof mass relative to the case is proportional, at low frequencies, to the specific force along the sensitive axis.

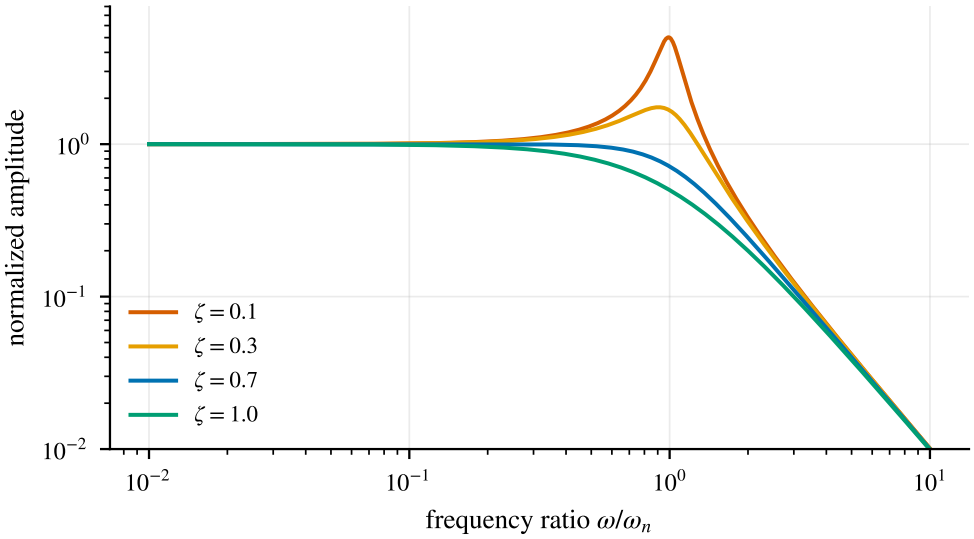



**Figure 15.2:** Frequency response of the spring-mass accelerometer model for several damping ratios. Below the natural frequency the response is flat: the deflection is proportional to specific force. A damping ratio near 0.7 gives the widest flat band without a resonant peak.

### 15.1.2 Specific force

The quantity measured is the *specific force*

$$f = a - g, \tag{15.3}$$

the non-gravitational force per unit mass acting on the sensor (the spring force divided by $m$). Gravity acts on the mass and the case equally and cannot be felt directly: this is Einstein's equivalence principle. Two cases build intuition.

- **At rest on a table**, $a = 0$, so $f = -g$. With $g_w = [0, 0, -9.81]^{\mathsf{T}}$, the accelerometer reads $+9.81$ m/s$^2$ *upward*: it senses the table pushing it up.
- **In free fall**, $a = g$, so $f = 0$. A falling IMU reads zero, whatever its velocity.

To recover the kinematic acceleration from the measurement, the estimator rotates the specific force into the world frame and *adds gravity back*: $a_w = R_{wb} f_b + g_w$. A sign error here produces a vertical acceleration error of $2g \approx 20$ m/s$^2$ and an obviously diverging altitude, which is fortunately easy to recognize.

**Noise.** Even a perfect mechanical sensor is noisy: the proof mass is jostled by the thermal motion of the surrounding gas, a *thermo-mechanical* noise whose acceleration density is about $\sqrt{4k_B T\omega_n/(mQ)}$ (with $k_B$ Boltzmann's constant, $T$ the temperature and $Q$ the mechanical quality factor). Tiny masses are noisier, which is the basic trade-off of MEMS inertial sensing. Readout electronics add their own noise.

## 15.2 How a MEMS gyroscope works

A MEMS *gyroscope* has no spinning wheel. It keeps a proof mass vibrating and detects the Coriolis force that rotation induces. Let the mass be driven along the $x$-axis of the sensor at frequency $\omega_d$, so its velocity relative to the sensor is $v = A\omega_d \cos(\omega_d t)\, e_x$. If the sensor rotates with angular velocity $\Omega$, then in the sensor frame the mass experiences the Coriolis acceleration $-2\Omega \times v$ (Equation (7.24)). For a rotation about the $z$-axis this acceleration points along $y$:

$$a_y = -2\,\Omega_z\, A\omega_d \cos(\omega_d t). \tag{15.4}$$

The resulting vibration along $y$ (the *sense* mode) has an amplitude proportional to the rate $\Omega_z$ and oscillates at the drive frequency, so the electronics recover $\Omega_z$ by demodulating the sense signal synchronously with the drive. The sensitive axis is perpendicular to both the drive and the sense directions.

Real designs use two or four masses vibrating in anti-phase (a *tuning fork*): their Coriolis forces are opposite and add in the differential readout, while linear accelerations and vibrations push all masses the same way and cancel. Imperfect cancellation leaves a small sensitivity of the gyro output to acceleration ($g$-sensitivity). Manufacturing asymmetries couple the drive into the sense mode (*quadrature*), and their drift with temperature is a major source of gyro bias.

## 15.3 The measurement model

### 15.3.1 The project's model

**Frozen convention: IMU model, AGENTS.md C6**

$$\omega_m = \omega_b + b_g + n_g, \qquad a_m = R_{wb}^{\mathsf{T}}\big(a_w - g_w\big) + b_a + n_a, \qquad \dot{b}_g = n_{b_g}, \quad \dot{b}_a = n_{b_a}, \tag{15.5}$$

with $\omega_m$, $a_m$ the gyroscope and accelerometer readings in the body frame, $\omega_b$ the true angular rate, $a_w$ the true acceleration of the body in the world frame, $b_g$, $b_a$ the biases (body frame), and $n_g, n_a, n_{b_g}, n_{b_a}$ zero-mean white noises with densities $\sigma_g, \sigma_a, \sigma_{b_g}, \sigma_{b_a}$. The noise vector is ordered $w = [n_a, n_g, n_{b_a}, n_{b_g}] \in \mathbb{R}^{12}$.

The model has two kinds of error. *White noise* ($n_g$, $n_a$) is independent from sample to sample and averages out. *Bias* ($b_g$, $b_a$) is a slowly varying offset that does not average out and is therefore estimated as part of the state (a shaping filter, Chapter 6). Its slow drift is modeled as a random walk driven by $n_{b_g}$, $n_{b_a}$. Over the minutes of a EuRoC sequence the biases change little but measurably.

| Error | Description | In the model? |
|---|---|---|
| White noise | sample-to-sample electronic and thermo-mechanical noise (angle/velocity random walk) | yes, $n_g$, $n_a$ |
| Turn-on bias | constant offset that differs at each power-up | yes, initial $b$ and $P_0$ |
| In-run bias drift | slow wandering of the offset | yes, random walk |
| Bias instability | flicker ($1/f$) noise floor of the bias | approximated by the random walk |
| Scale factor | output = $(1 + s)\times$ input | no |
| Axis misalignment | sensing axes not exactly orthogonal / aligned with the case | no |
| $g$-sensitivity | gyro output depends on acceleration | no |
| Temperature effects | bias and scale factor change with temperature | no (absorbed by bias walk) |
| Quantization | finite resolution of the ADC | no (below white noise) |
| Saturation, vibration | clipping on impacts; aliasing of high-frequency vibration | no |
| Earth rotation | gyros sense $7.3 \times 10^{-5}$ rad/s | no (Chapter 7) |

**Table 15.1:** IMU error sources and how the project's model treats them.

### 15.3.2 A fuller error model

High-accuracy inertial systems use a richer model, of which (15.5) is the special case $S = M = G = 0$:

$$a_m = (I + S_a)M_a\, f_b + b_a + n_a, \qquad \omega_m = (I + S_g)M_g\, \omega_b + G_g\, f_b + b_g + n_g. \tag{15.6}$$

Here $S$ is a diagonal matrix of *scale-factor* errors (the output is $(1 + s)$ times the input), $M$ a near-identity matrix describing *axis misalignment and non-orthogonality* (the three sensing axes are neither exactly perpendicular nor exactly aligned with the body frame), and $G_g$ the $g$-sensitivity of the gyroscope. Each of these parameters can be calibrated, estimated online as additional states, or ignored, at the cost of some unmodeled error.

Table 15.1 lists the main error sources. Unmodeled errors do not disappear: they appear as apparent extra noise or apparent bias drift. A filter that ignores them must compensate with larger noise parameters than the white-noise floor alone would suggest, which is why tuning is needed even with a well-calibrated sensor. The size of the effect is easy to estimate: a scale-factor error of $10^{-3}$ on a gyro turning at 1 rad/s is an apparent bias of $10^{-3}$ rad/s, as large as a poor bias and much larger than the EuRoC gyro's noise.

## 15.4 Calibration

**Gyroscope bias.** At rest, the gyroscope should read zero (or the Earth rate). Averaging a few seconds of data gives the bias, with a standard deviation of $\sigma_g/\sqrt{T}$ after $T$ seconds (Chapter 6): for EuRoC, $10^{-4}$ rad/s after 3 s.

**Accelerometer bias and scale: the six-position test.** Place the IMU with each axis pointing straight up and then straight down. For an axis with bias $b$ and scale factor $1 + s$, the two

readings are $(1+s)g + b$ and $-(1+s)g + b$, so

$$b = \frac{a_{\text{up}} + a_{\text{down}}}{2}, \qquad 1 + s = \frac{a_{\text{up}} - a_{\text{down}}}{2g}. \tag{15.7}$$

Using more orientations and a least-squares fit (Chapter 9) also yields the misalignments.

**Gyroscope scale and misalignment.** These require known rotations, from a rate table, or from a known sequence of orientations measured by an accelerometer.

**Camera–IMU calibration.** The extrinsic transform $T_{bc}$, the time offset between the sensors, and optionally the IMU's own scale and misalignment are estimated jointly by moving the rig in front of a calibration target. The Kalibr toolbox [17], which produced EuRoC's calibration, represents the trajectory as a continuous-time B-spline and solves one large nonlinear least-squares problem (Chapter 10) combining camera reprojection errors and IMU residuals.

**Temperature.** Biases and scale factors depend on temperature. Industrial IMUs are calibrated at several temperatures and compensated with an on-board temperature sensor; consumer IMUs often are not, and a filter must track the resulting drift as bias random walk.

## 15.5 Noise parameters and their units

The noise densities are continuous-time quantities (Section 6.3). For EuRoC's ADIS16448, the `imu0/sensor.yaml` file gives the values in Table 15.2.

| YAML key | Symbol | Value | Units |
|---|---|---|---|
| `gyroscope_noise_density` | $\sigma_g$ | $1.6968 \times 10^{-4}$ | $\text{rad/s}/\sqrt{\text{Hz}}$ |
| `accelerometer_noise_density` | $\sigma_a$ | $2.0 \times 10^{-3}$ | $\text{m/s}^2/\sqrt{\text{Hz}}$ |
| `gyroscope_random_walk` | $\sigma_{b_g}$ | $1.9393 \times 10^{-5}$ | $\text{rad/s}^2/\sqrt{\text{Hz}}$ |
| `accelerometer_random_walk` | $\sigma_{b_a}$ | $3.0 \times 10^{-3}$ | $\text{m/s}^3/\sqrt{\text{Hz}}$ |
| `rate_hz` | $1/\Delta t$ | 200 | Hz |

**Table 15.2:** EuRoC IMU noise parameters (`imu0/sensor.yaml`). Verify against your copy of the dataset.

The units follow from the definitions. A gyro rate in rad/s with a white noise density has units $\text{rad/s} \cdot \sqrt{\text{s}} = \text{rad/s}/\sqrt{\text{Hz}}$. A gyro bias random walk is the integral of white noise with units of $\text{rad/s}^2$, so its density is in $\text{rad/s}^2/\sqrt{\text{Hz}}$, and after $t$ seconds the bias has standard deviation $\sigma_{b_g}\sqrt{t}$ in rad/s.

**Discrete equivalents.** At sample period $\Delta t$ (Equation (6.8)):

$$\sigma_{g,d} = \frac{\sigma_g}{\sqrt{\Delta t}}, \qquad \sigma_{a,d} = \frac{\sigma_a}{\sqrt{\Delta t}}, \qquad \sigma_{b_g,d} = \sigma_{b_g}\sqrt{\Delta t}, \qquad \sigma_{b_a,d} = \sigma_{b_a}\sqrt{\Delta t}. \tag{15.8}$$

For EuRoC: $\sigma_{g,d} = 2.4 \times 10^{-3}$ rad/s per sample, $\sigma_{a,d} = 2.8 \times 10^{-2}$ m/s$^2$ per sample, and the gyro bias diffuses by $1.4 \times 10^{-6}$ rad/s per sample. In the filter you never need these directly, because $Q_d = G_c Q_c G_c^{\mathsf{T}} \Delta t$ uses the densities, but they are what a synthetic data generator must add to each sample.

**Datasheet units.** Manufacturers often quote angle random walk (ARW) in $^\circ/\sqrt{\text{h}}$ and velocity random walk (VRW) in m/s/$\sqrt{\text{h}}$. Since $1\ ^\circ/\sqrt{\text{h}} = \frac{\pi/180}{60}$ rad/$\sqrt{\text{s}} = 2.909 \times 10^{-4}$ rad/s/$\sqrt{\text{Hz}}$, EuRoC's $\sigma_g$ is an ARW of $0.58\ ^\circ/\sqrt{\text{h}}$, and its $\sigma_a$ is a VRW of $0.12$ m/s/$\sqrt{\text{h}}$. Bias instability is quoted in $^\circ$/h and is *not* the same thing as the random walk density.

**Measuring them.** The densities are measured from a long static recording with the Allan variance (Section 6.8 and Figure 6.3): white noise is read off the slope $-\frac{1}{2}$ at $\tau = 1$ s, and the bias random walk off the slope $+\frac{1}{2}$ at $\tau = 3$ s.

## 15.6 Tuning in practice

The densities from an Allan analysis describe a stationary sensor in a quiet lab. On a flying vehicle, vibration, temperature changes, scale-factor and misalignment errors, timing jitter and integration error all add to the effective noise. Common practice is to start from the Allan values (or the dataset's values) and inflate them by a modest factor until the filter is consistent, as judged by the statistical tests of Chapter 19. Two rules keep tuning honest.

1. **Change physically meaningful parameters only**, and keep them within a plausible range of their measured values.
2. **Judge on consistency statistics** (NEES on synthetic data, NIS and $3\sigma$ coverage on real data), not on trajectory error alone. Tuning for the lowest trajectory error on the test sequence is overfitting.

**Pitfall: mixing up the two discretizations**

The white-noise variance per sample is $\sigma^2/\Delta t$ (larger at higher rate), while the random-walk variance per step is $\sigma_b^2 \Delta t$ (smaller at higher rate). Swapping them is a common bug in synthetic data generators, and it produces noise that is wrong by a factor of $1/\Delta t^2 = 40\,000$ at 200 Hz.

## 15.7 The EuRoC IMU stream

EuRoC's `imu0/data.csv` contains one row per sample: `timestamp [ns], w_x, w_y, w_z [rad/s], a_x, a_y, a_z [m/s^2]`, i.e. $\omega_m$ and $a_m$ in $B$ (AGENTS.md C7). Samples arrive at nominally 200 Hz, hardware-synchronized with the cameras. The filter must nevertheless take $\Delta t$ from consecutive timestamps (AGENTS.md C5): real data has jitter and occasional gaps, which Milestone 3 logs. The ground-truth file starts later than the IMU file, so the filter is initialized at the first ground-truth sample at or after the stream start.

**Project link: Milestones 3 and 4**

M3 parses `sensor.yaml` into exactly the parameters of Table 15.2 and builds the event stream. M4's synthetic trajectory generator produces noise-free IMU data from (15.5); adding noise with the discrete equivalents above turns it into the Monte Carlo generator of M5.

**Key takeaways**

- An accelerometer is a spring-mass system whose deflection, below resonance, is proportional to specific force $f = a - g$: it reads $+g$ upward at rest and zero in free fall.
- A MEMS gyroscope measures the Coriolis force on a vibrating mass.
- $\omega_m = \omega_b + b_g + n_g$ and $a_m = R_{wb}^{\mathsf{T}}(a_w - g_w) + b_a + n_a$, with random-walk biases; scale factors and misalignments are neglected.
- Biases and scale factors can be calibrated with static multi-position tests; camera–IMU extrinsics with a target and a continuous-time solver.
- Noise densities have units of $[u]/\sqrt{\text{Hz}}$; per-sample white noise is $\sigma/\sqrt{\Delta t}$, per-step bias diffusion is $\sigma_b\sqrt{\Delta t}$.
- Unmodeled errors force noise inflation; tune on consistency, not on accuracy.

## Exercises

**15.1** An IMU lies on a table tilted by $10^\circ$ about its $x$-axis. Compute the ideal accelerometer reading. Which component reveals the tilt, and with what sign?

**15.2** A MEMS accelerometer has a resonance at 5 kHz. How large is its static deflection per $\text{m/s}^2$? Compare with the size of a silicon atom ($\approx 0.2$ nm) and comment.

**15.3** Derive the gyroscope's Coriolis acceleration from (7.24), and explain why a tuning-fork design rejects linear acceleration.

**15.4** A six-position test gives $a_{\text{up}} = 9.83$ and $a_{\text{down}} = -9.79\ \text{m/s}^2$ on one axis. Compute the bias and scale factor.

**15.5** A gyroscope datasheet gives ARW $= 0.2\ ^\circ/\sqrt{\text{h}}$. Convert it to $\text{rad/s}/\sqrt{\text{Hz}}$ and to the per-sample standard deviation at 400 Hz.

**15.6** A scale-factor error of $s = 10^{-3}$ affects a gyro on a vehicle spinning at 1 rad/s. What equivalent bias does it produce? Why can't a constant-bias model absorb it during maneuvers?

## Solutions to the exercises

**15.1** At rest the accelerometer measures the specific force $f = R_{wb}^{\mathsf{T}}(a_w - g_w) = R_{wb}^{\mathsf{T}}(0, 0, g)$ ((15.5) without bias and noise). With $R_{wb} = R_x(10^\circ)$,

$$f = R_x(10^\circ)^{\mathsf{T}} \begin{bmatrix} 0 \\ 0 \\ g \end{bmatrix} = \begin{bmatrix} 0 \\ g \sin 10^\circ \\ g \cos 10^\circ \end{bmatrix} = \begin{bmatrix} 0 \\ 1.70 \\ 9.66 \end{bmatrix} \text{ m/s}^2.$$

The $y$-component reveals the tilt, with a positive sign: a positive rotation about $x$ lifts the body $y$-axis ($R_{wb} e_y = (0, \cos 10^\circ, \sin 10^\circ)$), so the upward reaction to gravity has a positive component along it. The magnitude is still $g$; only its direction in the body frame has changed.

**15.2** At frequencies far below resonance the deflection is $x = (a - g)/\omega_n^2$ (Equation (15.1)), so the static sensitivity is

$$\frac{1}{\omega_n^2} = \frac{1}{(2\pi \cdot 5000 \text{ Hz})^2} = 1.0 \times 10^{-9} \text{ m per m/s}^2,$$

one nanometre per m/s$^2$, about five silicon atoms; the full $1g$ deflects the proof mass by about 10 nm. A noise floor of $2 \times 10^{-3}$ m/s$^2/\sqrt{\text{Hz}}$ over a 100 Hz bandwidth (0.02 m/s$^2$) corresponds to a displacement of $2 \times 10^{-11}$ m, a tenth of an atom. This is possible only because the capacitive readout measures the *average* position of a large electrode, over many atoms, at a frequency where thermal and electronic noise can be filtered. It also explains the trade-off of Chapter 15: a stiffer (higher-frequency) sensor has more bandwidth but smaller deflections and therefore more relative noise.

**15.3** In the frame of the sensor, which rotates with angular velocity $\Omega$, (7.24) says that a mass moving with relative velocity $\dot{r}$ experiences, besides its true acceleration, the apparent accelerations $-2\,\Omega \times \dot{r}$ and $-\Omega \times (\Omega \times r)$. For the drive motion $\dot{r} = A\omega_d \cos(\omega_d t)\, e_x$ and a rate $\Omega_z$ about $z$,

$$-2\,\Omega \times \dot{r} = -2\Omega_z A\omega_d \cos(\omega_d t)\,(e_z \times e_x) = -2\Omega_z A\omega_d \cos(\omega_d t)\, e_y,$$

which is (15.4): an oscillation along $y$ at the drive frequency, with amplitude proportional to $\Omega_z$. The centripetal term is quadratic in $\Omega$ and does not oscillate at $\omega_d$, so demodulation at the drive frequency rejects it. In a tuning fork the two masses are driven in anti-phase: their velocities, and therefore their Coriolis accelerations, are opposite, while a linear acceleration pushes both the same way. The differential readout (difference of the two sense displacements) doubles the Coriolis signal and cancels the common linear acceleration; imperfect matching of the two masses leaves the small residual $g$-sensitivity of Table 15.1.

**15.4** With the formulas of the six-position test,

$$b = \frac{9.83 + (-9.79)}{2} = 0.02 \text{ m/s}^2 \ (\approx 2 \text{ mg}), \qquad 1 + s = \frac{9.83 - (-9.79)}{2 \cdot 9.81} = 1.000,$$

so this axis has a bias of 0.02 $\mathrm{m/s^2}$ and no measurable scale error. (The scale factor is relative to the gravity value used; with the local $g$ instead of 9.81, $s$ would change by the relative difference, a few parts in $10^4$ in practice.)

**15.5** Using $1\,^\circ/\sqrt{\mathrm{h}} = \frac{\pi/180 \text{ rad}}{\sqrt{3600 \text{ s}}} = 2.909 \times 10^{-4}$ rad/s/$\sqrt{\mathrm{Hz}}$, an ARW of $0.2\,^\circ/\sqrt{\mathrm{h}}$ is $\sigma_g = 5.82 \times 10^{-5}$ rad/s/$\sqrt{\mathrm{Hz}}$. At 400 Hz each sample has standard deviation $\sigma_g/\sqrt{\Delta t} = 5.82 \times 10^{-5}\sqrt{400} = 1.16 \times 10^{-3}$ rad/s. For comparison, EuRoC's gyroscope ($1.7 \times 10^{-4}$) has about three times this ARW.

**15.6** The reading is $(1 + s)\omega$, so the error is $s\omega = 10^{-3}$ rad/s at 1 rad/s: an equivalent bias of $10^{-3}$ rad/s (0.06 °/s), larger than the EuRoC gyro's noise over most horizons. A constant-bias model cannot absorb it during maneuvers because the error is proportional to the rate: it changes sign when the vehicle turns the other way, vanishes when it stops, and doubles when it turns twice as fast. A random-walk bias changes slowly by assumption, so the filter either lags behind these changes or, if the bias process noise is inflated to follow them, loses its ability to estimate the true bias. Each full turn accumulates an attitude error of $2\pi s = 6.3$ mrad, in the plane of the turn. The remedies are calibration (on a rate table) or estimating $s$ as an additional state when the vehicle rotates enough to make it observable.

Chapter 16

# Strapdown Propagation of the Nominal State

**In this chapter**

- State the continuous-time nominal kinematics and understand each term.
- Derive the exact solution of the kinematics for constant inputs over a step.
- Compare Euler, midpoint and Runge–Kutta integration, and predict their convergence orders.
- Propagate to arbitrary timestamps, handle gaps, and initialize the nominal state.
- Understand IMU preintegration as used by optimization-based estimators.

A *strapdown* inertial system has its sensors rigidly attached (strapped down) to the vehicle, as opposed to mounted on a stabilized gimbal platform. All the work of keeping track of orientation is done in software, by integrating the gyroscope. This chapter is about that integration.

## 16.1 Continuous-time kinematics

### 16.1.1 The navigation equations

The *mechanization equations* follow from three facts established earlier. The position changes with the velocity, $\dot{p}_{wb} = v_{wb}$. The velocity changes with the acceleration, which by the definition of specific force (Chapter 15) is the measured specific force rotated into the world frame plus gravity, $\dot{v}_{wb} = a_w = R_{wb} f_b + g_w$. And the attitude changes with the body angular velocity, $\dot{R}_{wb} = R_{wb}[\omega_b]_\times$ (Section 7.8). Here the world frame is treated as inertial, with the effects of the Earth's rotation neglected or absorbed into gravity and the gyro bias; Chapter 7 showed that they are tiny over the scales of a EuRoC flight. Substituting the IMU model, $f_b = a_m - b_a - n_a$ and $\omega_b = \omega_m - b_g - n_g$, gives the true kinematics of Chapter 17, and replacing the unknown biases by their estimates and setting the noise to zero gives the nominal kinematics.

**Frozen convention: nominal propagation, AGENTS.md F1**

$$\hat{a} = a_m - \hat{b}_a, \quad \hat{\omega} = \omega_m - \hat{b}_g; \qquad \dot{\hat{p}} = \hat{v}, \quad \dot{\hat{v}} = \hat{R}_{wb}\,\hat{a} + g_w, \quad \dot{\hat{q}} = \tfrac{1}{2}\,\hat{q} \otimes [0,\, \hat{\omega}], \quad \dot{\hat{b}}_a = \dot{\hat{b}}_g = 0. \tag{16.1}$$

The attitude update is always multiplicative, $\hat{q} \leftarrow \hat{q} \otimes \mathrm{Exp}_q(\hat{\omega}\Delta t)$, followed by normalization. The integration scheme for $p$ and $v$ is chosen and justified in Milestone 4 and

logged in `PROGRESS.md`.

The equations form a cascade: attitude depends on the gyroscope only; velocity depends on attitude and the accelerometer; position depends on velocity. Errors cascade the same way, which is the origin of the $t^2$ and $t^3$ growth laws of Chapter 1.

## 16.2 Exact solution for constant inputs

Suppose $\hat{\omega}$ and $\hat{a}$ are constant over $[t_k, t_k + \Delta t]$, which is what a zero-order hold of one IMU sample assumes. Then the kinematics can be solved in closed form.

**Proposition 16.1** (Constant-input propagation). *With $\hat{\omega}$, $\hat{a}$ constant over the step and $\phi = \hat{\omega}\Delta t$,*

$$\hat{R}_{k+1} = \hat{R}_k \operatorname{Exp}(\phi), \tag{16.2}$$

$$\hat{v}_{k+1} = \hat{v}_k + g_w \Delta t + \hat{R}_k \, \Delta t \, J_l(\phi) \, \hat{a}, \tag{16.3}$$

$$\hat{p}_{k+1} = \hat{p}_k + \hat{v}_k \Delta t + \tfrac{1}{2} g_w \Delta t^2 + \hat{R}_k \, \Delta t^2 \, N(\phi) \, \hat{a}, \tag{16.4}$$

*where $N(\phi) = \sum_{j \geq 0} [\phi]_\times^j / (j+2)! = \frac{1}{2} I + \frac{\theta - \sin\theta}{\theta^3} [\phi]_\times + \frac{\theta^2/2 + \cos\theta - 1}{\theta^4} [\phi]_\times^2$ and $\theta = \|\phi\|$.*

*Proof.* The attitude is Proposition 7.4. During the step $\hat{R}(t_k + s) = \hat{R}_k \operatorname{Exp}(\hat{\omega} s)$, so $\hat{v}_{k+1} - \hat{v}_k = g_w \Delta t + \hat{R}_k \int_0^{\Delta t} \operatorname{Exp}(\hat{\omega} s) \, \mathrm{d}s \, \hat{a}$, and $\int_0^{\Delta t} \operatorname{Exp}(\hat{\omega} s) \, \mathrm{d}s = \Delta t \int_0^1 \operatorname{Exp}(u \phi) \, \mathrm{d}u = \Delta t \, J_l(\phi)$ by Theorem 8.9. Integrating once more gives the position, with $\int_0^{\Delta t} \int_0^s \operatorname{Exp}(\hat{\omega} u) \, \mathrm{d}u \, \mathrm{d}s = \Delta t^2 N(\phi)$ by term-wise integration of the exponential series, and the closed form follows from $[\phi]_\times^3 = -\theta^2 [\phi]_\times$. ∎

For small $\phi$, $J_l(\phi) \approx I + \frac{1}{2}[\phi]_\times$ and $N(\phi) \approx \frac{1}{2} I + \frac{1}{6}[\phi]_\times$. The correction terms account for the rotation of the specific-force vector during the step. At 200 Hz and 1 rad/s, $\|\phi\| = 0.005$, so they change the velocity increment by about 0.25%: small, but systematic.

## 16.3 Numerical integration schemes

Real inputs are not constant over a step: the IMU provides samples at $t_k$ and $t_{k+1}$, and the true signal varies between them. Three families of schemes are common. All of them update the attitude multiplicatively.

**Euler with zero-order hold.** Use the sample at the start of the step for the whole step:

$$\hat{R}_{k+1} = \hat{R}_k \operatorname{Exp}(\hat{\omega}_k \Delta t), \quad \hat{v}_{k+1} = \hat{v}_k + (\hat{R}_k \hat{a}_k + g_w)\Delta t, \quad \hat{p}_{k+1} = \hat{p}_k + \hat{v}_k \Delta t + \tfrac{1}{2}(\hat{R}_k \hat{a}_k + g_w)\Delta t^2. \tag{16.5}$$

Local error $O(\Delta t^2)$, global error $O(\Delta t)$. The dominant error is essentially a *half-sample time shift*: using the sample from the start of the interval for the whole interval delays the signal by $\Delta t/2$ on average. To see the local error, expand the true velocity increment $\int_{t_k}^{t_{k+1}} a_w(t) \, \mathrm{d}t = a_w(t_k)\Delta t + \frac{1}{2}\dot{a}_w(t_k)\Delta t^2 + O(\Delta t^3)$; Euler keeps only the first term, so each step errs by $\frac{1}{2}\dot{a}_w \Delta t^2$, and the errors of the $T/\Delta t$ steps accumulate to $O(\Delta t)$.

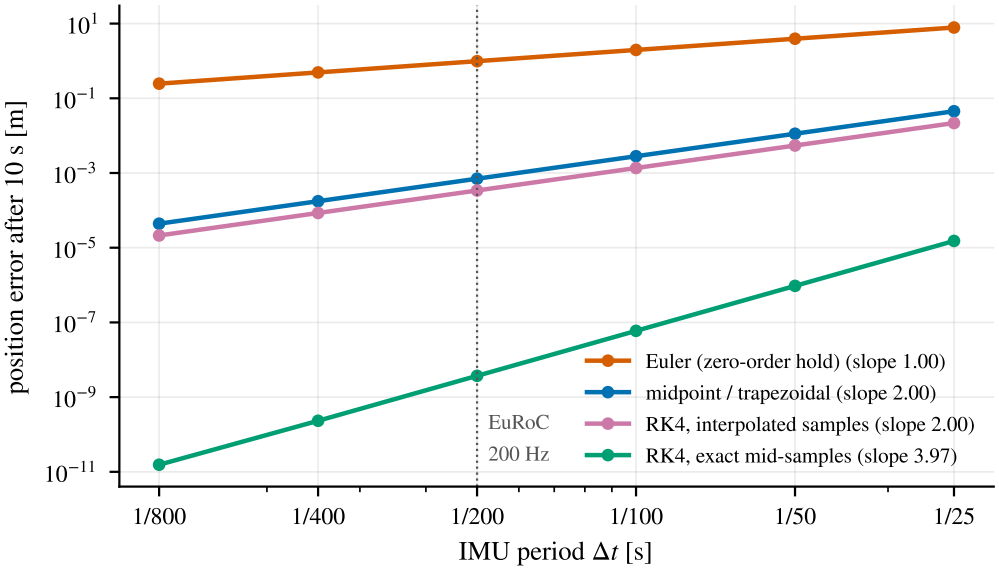



**Figure 16.1:** Position error after 10 s of noise-free integration on a synthetic trajectory (2 m circle at 0.8 rad/s with ±23° roll oscillations), as a function of the IMU period. The measured slopes match the predicted global orders. RK4 reaches fourth order only with exact mid-step inputs, which a real IMU does not provide; with interpolated inputs it is no better than the midpoint rule.

**Midpoint (trapezoidal).** Use the average of the two bounding samples:

$$\hat{R}_{k+1} = \hat{R}_k \operatorname{Exp}\left(\tfrac{1}{2}(\hat{\omega}_k + \hat{\omega}_{k+1})\Delta t\right), \quad \bar{a}_w = \tfrac{1}{2}\left(\hat{R}_k \hat{a}_k + \hat{R}_{k+1}\hat{a}_{k+1}\right) + g_w, \tag{16.6}$$

$$\hat{v}_{k+1} = \hat{v}_k + \bar{a}_w \Delta t, \qquad \hat{p}_{k+1} = \hat{p}_k + \hat{v}_k \Delta t + \tfrac{1}{2}\bar{a}_w \Delta t^2.$$

Local error $O(\Delta t^3)$, global $O(\Delta t^2)$, at the cost of having to wait for the next sample before completing the step.

**Runge–Kutta 4.** RK4 evaluates the dynamics at the start, twice at the middle, and at the end of the step. Its global error is $O(\Delta t^4)$ *if* the inputs at mid-step are known exactly. With an IMU they are not, and must be interpolated from the bounding samples. Linear interpolation is only second-order accurate, which caps the whole scheme at $O(\Delta t^2)$.

Figure 16.1 confirms the predicted orders. Halving $\Delta t$ divides the error by 2 for Euler and by 4 for the midpoint rule, which is exactly the convergence-order test of Milestone 4. The magnitudes matter as much as the slopes. At 200 Hz on this fairly dynamic trajectory, the Euler scheme accumulates about a meter of error in 10 s, far more than the sensor noise would cause (Figure 17.1), because the half-sample delay of the attitude creates a tilt error of order $\frac{1}{2}\omega\Delta t$, which leaks gravity. The midpoint rule is three orders of magnitude better. On gentler motion the difference shrinks, and frequent visual updates bound integration error in any case, but the integration error should be well below the noise-induced error, or it becomes an unmodeled error that the filter cannot account for.

**Key idea: choosing a scheme**

The integration error is a deterministic, unmodeled error. The scheme should make it small compared with the stochastic error the filter does model. Whichever scheme Milestone 4 adopts, document its order and verify it with the halving test on a trajectory with closed-form ground truth.

## 16.4 Coning, sculling and the rotation-vector equation

### 16.4.1 The rotation vector of a step

The attitude update over a step is a rotation $\Delta R = R(t_k)^{\mathsf{T}} R(t_{k+1})$, which we can write as $\operatorname{Exp}(\phi)$ for a rotation vector $\phi$. If the angular velocity keeps a fixed direction during the step, $\phi = \int \omega \, \mathrm{d}t$. If its direction changes, this is wrong (Proposition 4.7), and the correct $\phi$ obeys a differential equation of its own.

**Proposition 16.2** (Bortz equation). *The rotation vector $\phi(t)$ with $\operatorname{Exp}(\phi(t)) = R(t_k)^{\mathsf{T}} R(t)$ satisfies*

$$\dot{\phi} = J_r^{-1}(\phi)\,\omega = \omega + \tfrac{1}{2}\,\phi \times \omega + D(\|\phi\|)\,\phi \times (\phi \times \omega), \tag{16.7}$$

*with $D$ the coefficient function of Theorem 8.9.*

*Proof.* Over an instant $\mathrm{d}t$, $\operatorname{Exp}(\phi + \dot{\phi}\,\mathrm{d}t) = \operatorname{Exp}(\phi)\operatorname{Exp}(\omega\,\mathrm{d}t)$. By the definition of the right Jacobian (8.19), the left side is $\operatorname{Exp}(\phi)\operatorname{Exp}(J_r(\phi)\dot{\phi}\,\mathrm{d}t)$, so $J_r(\phi)\dot{\phi} = \omega$. Expand $J_r^{-1}$ with (8.21). ∎

The term $\frac{1}{2}\phi \times \omega$ is non-zero only when $\omega$ is not parallel to the rotation already accumulated: it is the *non-commutativity correction*. Under *coning motion*, in which the angular velocity vector itself rotates (for example $\omega = (a\cos\Omega t,\ a\sin\Omega t,\ 0)$, the motion of a vibrating or wobbling body), this correction does not average to zero. Integrating the rate vector alone then produces a steady, spurious rotation about the cone axis, a drift that no amount of averaging removes.

### 16.4.2 The two-sample coning correction

Given the integrated gyro increments $\alpha_1$ and $\alpha_2$ over the two halves of a step (which a high-rate IMU, or two consecutive samples, provides), the rotation vector of the whole step is, to third order,

$$\phi \approx \alpha_1 + \alpha_2 + \tfrac{2}{3}\,\alpha_1 \times \alpha_2. \tag{16.8}$$

*Derivation.* Keep the first-order Bortz equation $\dot{\phi} \approx \omega + \frac{1}{2}\phi \times \omega$ and suppose the rate varies linearly over the step, $\omega(s) = a + bs$ for $s \in [0, h]$. To the needed order $\phi(s) \approx \int_0^s \omega = as + \frac{1}{2}bs^2$, so

$$\begin{aligned}\phi(h) &\approx \int_0^h \omega\,\mathrm{d}s + \frac{1}{2}\int_0^h \left(as + \tfrac{1}{2}bs^2\right) \times (a + bs)\,\mathrm{d}s \\ &= \int_0^h \omega\,\mathrm{d}s + \frac{1}{2}(a \times b)\int_0^h \left(s^2 - \tfrac{1}{2}s^2\right)\mathrm{d}s = \alpha_1 + \alpha_2 + \frac{h^3}{12}\,a \times b.\end{aligned}$$

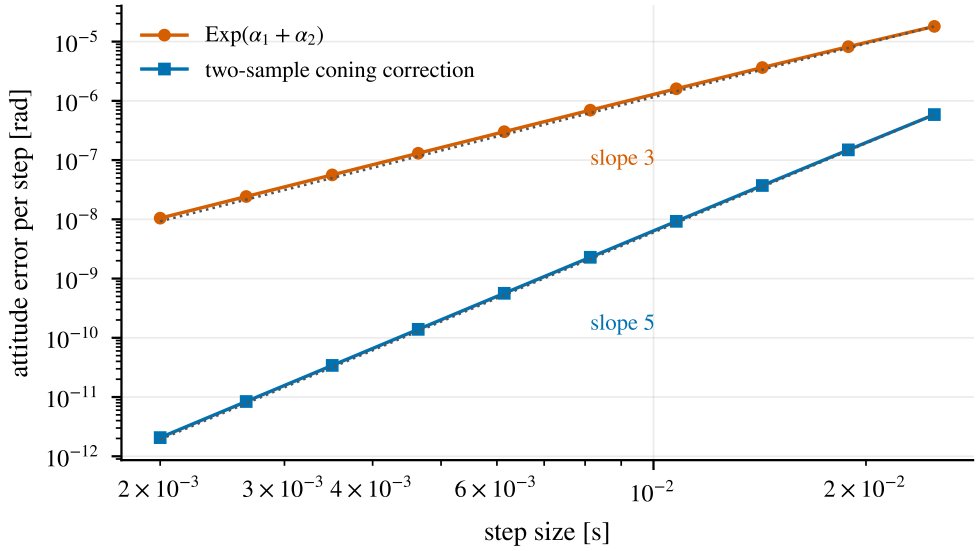



**Figure 16.2:** Attitude error over one step under coning motion (rate amplitude 0.5 rad/s, coning frequency 10 Hz), as a function of the step size. Exponentiating the integrated rate errs at third order; the two-sample correction (16.8) reduces the error to fifth order.

The half-step increments are $\alpha_1 = \frac{h}{2}a + \frac{h^2}{8}b$ and $\alpha_2 = \frac{h}{2}a + \frac{3h^2}{8}b$, whose cross product is $\alpha_1 \times \alpha_2 = \frac{h^3}{8}\, a \times b$. Hence $\frac{h^3}{12}a \times b = \frac{2}{3}\alpha_1 \times \alpha_2$. ∎

Figure 16.2 confirms the orders. *Sculling* is the analogous effect for velocity: when rotation and acceleration oscillate in phase, the specific force is rotated while it is being integrated, and the error rectifies into a velocity drift; it has similar multi-sample corrections. High-end inertial systems, with gyros sampled at kHz rates on vibrating platforms, rely on such algorithms [20]. For a MEMS IMU sampled at 200 Hz, with vibration filtered by the sensor's own electronics, the effects are small compared with the sensor noise, and the project's single-sample schemes suffice. The analysis still matters: it tells you what you are neglecting, and how to check that it is negligible.

## 16.5 Timing

### 16.5.1 Propagating to an arbitrary time

Images arrive between IMU samples. To clone the state at an image time $t_c \in (t_k, t_{k+1})$ (AGENTS.md F5), the filter must propagate exactly to $t_c$: interpolate the IMU reading at $t_c$ linearly between samples $k$ and $k+1$, propagate from $t_k$ to $t_c$ with the interpolated input, clone, and then propagate from $t_c$ to $t_{k+1}$. The covariance follows the same split, with $\Delta t$ replaced by the two partial intervals.

### 16.5.2 Event ordering and gaps

Measurements must be processed in timestamp order, and the state must be propagated to a measurement's time before the measurement is applied (Chapter 28). Milestone 3 fixes

the tie rule: an IMU sample precedes a measurement with an equal timestamp, so the state is propagated to that time first. Gaps in the IMU stream (intervals larger than about 1.5 nominal periods) must not be assumed away. $\Delta t$ always comes from the timestamps, and a long gap simply produces a long step with a correspondingly large $Q_d$.

## 16.6 Initialization

### 16.6.1 From ground truth

The project initializes the nominal state from the first ground-truth sample at or after the start of the stream (Milestone 4): $p$, $v$, $q$, $b_a$ and $b_g$ all come from the ground-truth columns, mapped with the column order of AGENTS.md C7. This isolates propagation from the initialization problem. The use of ground truth for initialization is logged when the full VIO runs (Milestone 10b).

### 16.6.2 Static initialization

A real system initializes from its own sensors. If the vehicle is at rest for about a second,

$$\bar{a}_m = \mathrm{mean}(a_m) \approx R_{wb}^{\mathsf{T}}(-g_w) + b_a, \qquad \bar{\omega}_m = \mathrm{mean}(\omega_m) \approx b_g. \tag{16.9}$$

The gyro bias is the mean rate. Neglecting $b_a$, the unit vector $u_b = \bar{a}_m / \|\bar{a}_m\|$ is the world "up" direction expressed in the body frame, $u_b = R_{wb}^{\mathsf{T}} e_z$. Any rotation with $R_{wb} u_b = e_z$ is consistent with it. One such rotation turns $u_b$ onto $e_z$ about the axis perpendicular to both:

$$R_{wb} = \mathrm{Exp}\Big( \operatorname{atan2}\left(\|u_b \times e_z\|,\ u_b^{\mathsf{T}} e_z\right) \frac{u_b \times e_z}{\|u_b \times e_z\|} \Big), \tag{16.10}$$

(with $R_{wb} = I$ if $u_b = e_z$ already), and composing it on the left with any rotation $R_z(\psi)$ about the vertical gives all the others. Roll and pitch are determined; yaw is arbitrary, and is set to zero (or to the ground-truth yaw for evaluation).

**Pitfall: tilt and accelerometer bias are indistinguishable at rest**

A horizontal accelerometer bias $b_a$ produces the same reading as a tilt of $\|b_a\|/g$: a bias of 10 mm/s$^2$ looks exactly like a tilt of 1 mrad. At rest the filter cannot separate them, and the initial covariance must say so (large $\sigma_{b_a}$, correlated with the tilt). They become separable once the vehicle rotates, because the bias rotates with the body while gravity does not.

Initial covariances should reflect real uncertainty: a few milliradians in roll and pitch, a large or unknown yaw, the turn-on bias range from the datasheet, and a small but non-zero velocity uncertainty at rest. *Dynamic* initialization from a moving start, as in VINS-Mono [42], first solves a vision-only structure-from-motion problem and then aligns it with preintegrated IMU data to recover scale, gravity and velocity.

## 16.7 Sidebar: IMU preintegration

An optimization-based estimator may relinearize a window of states many times. Re-integrating every IMU sample between keyframes $i$ and $j$ each time the estimate of state $i$ changes would be wasteful. *Preintegration* [37, 16] integrates the measurements in the body frame of keyframe $i$, so that the result does not depend on the state at $i$:

$$\Delta R_{ij} = \prod_{k=i}^{j-1} \operatorname{Exp}(\hat{\omega}_k \Delta t), \quad \Delta v_{ij} = \sum_{k=i}^{j-1} \Delta R_{ik}\, \hat{a}_k \Delta t, \quad \Delta p_{ij} = \sum_{k=i}^{j-1} \left( \Delta v_{ik} \Delta t + \tfrac{1}{2} \Delta R_{ik}\, \hat{a}_k \Delta t^2 \right). \tag{16.11}$$

These relate the two keyframe states through $R_j = R_i \Delta R_{ij}$, $v_j = v_i + g\Delta t_{ij} + R_i \Delta v_{ij}$ and $p_j = p_i + v_i \Delta t_{ij} + \frac{1}{2} g \Delta t_{ij}^2 + R_i \Delta p_{ij}$. The preintegrated quantities depend on the bias estimate, and first-order bias Jacobians avoid re-integration when the bias estimate changes. A filter like the MSCKF does not need preintegration, because it integrates each sample exactly once.

**Project link: Milestone 4**

Exit criteria: a stationary input keeps the state constant to $10^{-9}$ for 60 s; a constant rate reproduces $q_0 \otimes \operatorname{Exp}_q(\omega t)$; a circular trajectory converges at the predicted order; the quaternion norm stays within $10^{-12}$ of one after $10^6$ steps; propagation does not allocate; and 10 s of dead reckoning on MH_01 produce no NaN.

**Key takeaways**

- $\dot{p} = v$, $\dot{v} = R\hat{a} + g$, $\dot{q} = \frac{1}{2} q \otimes [0, \hat{\omega}]$; attitude updates are multiplicative.
- For constant inputs the solution is exact: $R \operatorname{Exp}(\phi)$, $v + g\Delta t + R\Delta t J_l(\phi)\hat{a}$, and a similar position formula.
- Euler is first order (a half-sample delay), midpoint second order. RK4 is limited to second order by input interpolation.
- Integration error is unmodeled error; keep it well below sensor-noise error and verify the order.
- Propagate exactly to measurement times by splitting the IMU interval.
- At rest, gravity gives roll and pitch, the mean gyro gives $b_g$, and tilt and horizontal $b_a$ are indistinguishable.

## Exercises

**16.1** Verify Proposition 16.1 numerically by comparing with an ODE solver at tight tolerance.

**16.2** Show that the Euler scheme applied to a constant rotation rate is exact for the attitude, but not for the velocity, and quantify the velocity error per step in terms of $\|\hat{\omega}\|\Delta t$.

**16.3** Reproduce Figure 16.1. Then add gyro noise and plot the noise-induced position error on the same axes. At what IMU rate does integration error fall below noise error for each scheme?

**16.4** Implement the static initializer and test it on synthetic data with a known tilt. Add a horizontal accelerometer bias and show that it biases the estimated tilt by $\|b_a\|/g$.

**16.5** Why must the propagation to an image timestamp interpolate the IMU sample instead of using the nearest sample? Estimate the attitude error from using the nearest sample at 1 rad/s and 200 Hz.

## Solutions to the exercises

**16.1** Choose a non-trivial initial state ($R_0 = \mathrm{Exp}(0.2, -0.1, 0.4)$, $v_0 = (1, 0.5, -0.2)$, $p_0 = (0.1, 0.2, 0.3)$), constant inputs $\hat{\omega} = (0.3, -0.5, 0.8)$ rad/s and $\hat{a} = (1, -2, 9)$ m/s$^2$, and a long step $\Delta t = 0.5$ s so that $\|\phi\| = 0.5$ rad and the correction terms are large. Integrating $\dot{R} = R[\hat{\omega}]_\times$, $\dot{v} = R\hat{a} + g_w$, $\dot{p} = v$ with `scipy.integrate.solve_ivp` (DOP853, tolerances $10^{-13}$) and comparing with Proposition 16.1 gives differences of $2 \times 10^{-15}$ in $R$ and $8 \times 10^{-15}$ in $v$ and $p$: the closed forms are exact. Setting $J_l = I$ and $N = \frac{1}{2}I$ instead produces errors of order $\frac{1}{2}\|\phi\|\,\|\hat{a}\|\Delta t$, many orders of magnitude larger.

**16.2** With constant $\hat{\omega}$ the Euler scheme's attitude update $\hat{R}_k\,\mathrm{Exp}(\hat{\omega}\Delta t)$ is exactly Proposition 7.4. Its velocity update uses $\hat{R}_k\hat{a}\,\Delta t$, while the exact increment is $\hat{R}_k\Delta t J_l(\phi)\hat{a}$ with $J_l(\phi) = I + \frac{1}{2}[\phi]_\times + O(\|\phi\|^2)$. The error per step is

$$\hat{R}_k\Delta t\,(J_l(\phi) - I)\hat{a} = \tfrac{1}{2}\hat{R}_k\,\Delta t^2\,\hat{\omega} \times \hat{a} + O(\Delta t^3),$$

a fraction $\frac{1}{2}\|\hat{\omega}\|\Delta t \sin\angle(\hat{\omega}, \hat{a})$ of the step's velocity increment: 0.25% at 1 rad/s and 200 Hz (a numerical check gives exactly 0.0025). It is the effect of holding the specific force fixed in the body frame at the start of the step while the body rotates; it is systematic, so it accumulates.

**16.3** Running the code of Figure 16.1 gives position errors after 10 s at 200 Hz of 1.0 m (Euler), $7 \times 10^{-4}$ m (midpoint) and $3 \times 10^{-4}$ m (RK4 with interpolated mid-samples), each scaling with its order. Adding EuRoC's gyro and accelerometer white noise to the samples and repeating 40 times gives a noise-induced RMS position error of about 0.17–0.19 m after 10 s, the same at 100, 200 and 800 Hz: sampling faster does not reduce the noise per unit time (Section 6.3). The noise error is therefore a horizontal line on the plot, and each integration error curve crosses it where:

- Euler: its error $\approx 1.0\ \mathrm{m} \times (200/f)$ falls below 0.18 m only above about 1.1 kHz, faster than most MEMS IMUs deliver;
- midpoint and interpolated RK4: their errors are below the noise at every rate tested, down to 25 Hz (0.045 and 0.022 m).

At EuRoC's 200 Hz a second-order scheme makes the integration error two to three orders of magnitude smaller than the noise, which is the requirement of Chapter 16.

**16.4** Generate one second of static accelerometer samples at 200 Hz for a known tilt (roll 5°, pitch −3°) with EuRoC noise, average them, and apply the initializer. The estimated "up" direction is within 0.2 mrad of the truth (the residual is the noise of the average, $\sigma_a/\sqrt{1\,\mathrm{s}}/g$ per axis). Adding a body-frame bias $b_a = (0.05, 0, 0)$ m/s$^2$, almost horizontal for this attitude, moves the estimate by 4.9 mrad, against the prediction $\|b_{a,\perp}\|/g = 5.1$ mrad, where $b_{a,\perp}$ is the component perpendicular to gravity (the difference is the noise of the average). The reason: the initializer takes the direction of $R^\mathsf{T}(-g_w)+b_a$ to be "up"; a horizontal bias tilts that vector by $\arctan(\|b_{a,\perp}\|/g) \approx \|b_{a,\perp}\|/g$, and nothing in a static recording distinguishes it from a real tilt.

**16.5** The clone must be the pose at the image timestamp $t_c$. Propagating only to the nearest IMU sample makes the clone the pose at a time that differs from $t_c$ by up to half a sample

period, $\Delta t/2 = 2.5$ ms at 200 Hz (1.25 ms on average, for a uniformly distributed offset). At 1 rad/s the attitude error is up to 2.5 mrad, comparable to the angle subtended by one pixel of the EuRoC camera ($1/458 \approx 2.2$ mrad), and at 1 m/s the position error is up to 2.5 mm. Unlike pixel noise this error is not random from the filter's point of view: it is correlated with the motion, so it biases every visual constraint during fast rotations. Interpolating the IMU sample at $t_c$ and propagating exactly to it removes the error at no cost.

Chapter 17

# Error-State Dynamics and Covariance Propagation

**In this chapter**

- Set up the 15-dimensional IMU error state with the frozen index layout.
- Derive linearized error dynamics with the four-step recipe, including the attitude error under a perturbation convention.
- Discretize into $\Phi$ and $Q_d$ and propagate the covariance of the IMU state and its clones.
- Predict analytically how fast each noise source inflates the position uncertainty.
- Validate the propagation by finite differences and by Monte Carlo simulation.

## 17.1 True and nominal systems

The true state evolves under the IMU model (15.5) solved for the physical quantities. With $\omega = \omega_m - b_g - n_g$ and $a = a_m - b_a - n_a$ the true body rate and specific force,

$$\dot{p} = v, \qquad \dot{v} = R\,(a_m - b_a - n_a) + g_w, \qquad \dot{R} = R\,[\omega_m - b_g - n_g]_\times, \qquad \dot{b}_a = n_{b_a}, \qquad \dot{b}_g = n_{b_g}, \tag{17.1}$$

where $R = R_{wb}$. The nominal state follows (16.1), which is (17.1) with the biases replaced by their estimates and the noise set to zero. The error state measures their difference.

**Frozen convention: error-state layout, AGENTS.md C3**

| Indices | Block | Meaning |
|---|---|---|
| 0–2 | $\delta p$ | position error, world frame |
| 3–5 | $\delta v$ | velocity error, world frame |
| 6–8 | $\delta\theta$ | attitude error, **body frame (local)**: $R = \hat{R}\,\mathrm{Exp}(\delta\theta)$ |
| 9–11 | $\delta b_a$ | accelerometer bias error |
| 12–14 | $\delta b_g$ | gyroscope bias error |
| $15 + 6i \ldots +2$ | $\delta p_i$ | clone $i$ position error |
| $18 + 6i \ldots +2$ | $\delta\theta_i$ | clone $i$ attitude error (local) |

Noise ordering: $w = [n_a, n_g, n_{b_a}, n_{b_g}] \in \mathbb{R}^{12}$.

Index constants belong in one place in the code (`constexpr` offsets in `types.hpp`), and every block access goes through them. Hard-coded literals such as `P.block<3,3>(6,6)` scattered through the code are how layout bugs are born.

## 17.2 Deriving the error dynamics

The goal is the linear system

$$\dot{\delta x}_I = F_c\,\delta x_I + G_c\,w, \qquad F_c \in \mathbb{R}^{15\times 15}, \quad G_c \in \mathbb{R}^{15\times 12}, \tag{17.2}$$

obtained with the recipe of Section 14.3. Two of the five blocks are immediate.

**Position.** Substituting $p = \hat{p} + \delta p$ and $v = \hat{v} + \delta v$ into $\dot{p} = v$ and subtracting $\dot{\hat{p}} = \hat{v}$ gives $\dot{\delta p} = \delta v$ exactly. No linearization is needed.

**Biases.** $\dot{b}_a = n_{b_a}$ and $\dot{\hat{b}}_a = 0$ give $\dot{\delta b}_a = n_{b_a}$, and likewise $\dot{\delta b}_g = n_{b_g}$.

The velocity and attitude blocks involve the rotation and require the Lie tools of Chapter 8. One lemma handles the time derivative of the perturbation itself.

> **Lemma 17.1** (Time derivative of a perturbation). *For a differentiable $\delta\theta(t)$, $\frac{\mathrm{d}}{\mathrm{d}t}\operatorname{Exp}(\delta\theta) = \operatorname{Exp}(\delta\theta)[J_r(\delta\theta)\,\dot{\delta\theta}]_\times = [J_l(\delta\theta)\,\dot{\delta\theta}]_\times \operatorname{Exp}(\delta\theta)$. To first order in $\delta\theta$, both reduce to $[\dot{\delta\theta}]_\times$ multiplying $\operatorname{Exp}(\delta\theta)$ on the corresponding side.*

*Proof.* Apply the definition (8.19) of $J_r$ and $J_l$ with $\delta = \dot{\delta\theta}\,\mathrm{d}t$. ∎

### 17.2.1 Worked example: attitude error under the global perturbation

To demonstrate the method without solving the project's exercise, we first derive the attitude error dynamics for the *global* perturbation $R = \operatorname{Exp}(\delta\theta_g)\hat{R}$. This is **not** the project's convention; it is here for contrast.

> **Example 17.2** (Global attitude error dynamics). Differentiate both sides of $R = \operatorname{Exp}(\delta\theta_g)\hat{R}$ using Lemma 17.1 to first order and the kinematics $\dot{R} = R[\omega]_\times$, $\dot{\hat{R}} = \hat{R}[\hat{\omega}]_\times$:
>
> $$\underbrace{\operatorname{Exp}(\delta\theta_g)\hat{R}[\omega]_\times}_{\dot{R}} \approx [\dot{\delta\theta}_g]_\times \operatorname{Exp}(\delta\theta_g)\hat{R} + \operatorname{Exp}(\delta\theta_g)\hat{R}[\hat{\omega}]_\times.$$
>
> Move the last term to the left and use $\omega - \hat{\omega} = -\delta b_g - n_g$:
>
> $$[\dot{\delta\theta}_g]_\times \operatorname{Exp}(\delta\theta_g)\hat{R} \approx \operatorname{Exp}(\delta\theta_g)\hat{R}[-\delta b_g - n_g]_\times.$$
>
> Multiply on the right by $(\operatorname{Exp}(\delta\theta_g)\hat{R})^{\mathsf{T}}$ and apply (2.14) with the rotation $\operatorname{Exp}(\delta\theta_g)\hat{R}$:
>
> $$[\dot{\delta\theta}_g]_\times \approx [\operatorname{Exp}(\delta\theta_g)\hat{R}(-\delta b_g - n_g)]_\times \approx [-\hat{R}\,\delta b_g - \hat{R}\,n_g]_\times,$$
>
> where the last step drops the product of $\delta\theta_g$ with $\delta b_g$ and $n_g$, both small. Hence
>
> $$\dot{\delta\theta}_g = -\hat{R}\,\delta b_g - \hat{R}\,n_g. \tag{17.3}$$
>
> The global attitude error does not depend on itself at all: the world-frame error is constant unless driven by gyro errors, which are rotated into the world by $\hat{R}$.

### 17.2.2 Your turn: the local (right) perturbation

**Derivation exercise (project Jacobian): attitude and velocity rows of $F_c$ and $G_c$**

Derive $\dot{\delta\theta}$ and $\dot{\delta v}$ under the project's local perturbation $R = \hat{R}\,\mathrm{Exp}(\delta\theta)$.

1. **Attitude.** Differentiate $R = \hat{R}\,\mathrm{Exp}(\delta\theta)$ with Lemma 17.1 (right form). Cancel the nominal term, then use $\mathrm{Exp}(-\delta\theta)[\hat{\omega}]_\times \mathrm{Exp}(\delta\theta) = [\mathrm{Exp}(-\delta\theta)\hat{\omega}]_\times$ and $\mathrm{Exp}(-\delta\theta)\hat{\omega} \approx \hat{\omega} - \delta\theta \times \hat{\omega}$. You should find a term proportional to $\delta\theta$ that the global version lacks. Explain it physically: what happens to a body-frame error when the body rotates?
2. **Velocity.** Substitute $R = \hat{R}\,\mathrm{Exp}(\delta\theta) \approx \hat{R}(I + [\delta\theta]_\times)$ and $a_m - b_a - n_a = \hat{a} - \delta b_a - n_a$ into $\dot{v} = R(a_m - b_a - n_a) + g_w$, subtract $\dot{\hat{v}} = \hat{R}\hat{a} + g_w$, drop second-order products, and use (2.8) to move $\delta\theta$ to the right.
3. **Assemble** $F_c$ and $G_c$ in the frozen order of AGENTS.md C3. Before filling any block, predict from the cascade structure of the kinematics which blocks must be zero.

**Check:** build $\Phi \approx I + F_c\Delta t$ and compare each column with $\big(f(\hat{x} \boxplus \epsilon e_i) \boxminus f(\hat{x})\big)/\epsilon$ for one step $f$ of your nominal integrator, at a state with non-identity attitude, non-zero rates, specific force and biases (Milestone 5). Agreement must be at the level of the $O(\Delta t^2)$ terms neglected by $I + F_c\Delta t$. Then record the result in `DOCS/derivations.md`.

*Worked solution: Appendix E.1 (page 350).*

Physically, the velocity row you will find encodes the most important coupling in inertial navigation: an attitude error tilts the computed specific force, so a fraction of the large vector $\hat{a}$ (dominated by the reaction to gravity, 9.81 m/s$^2$) leaks into the velocity error. That single term is behind the $t^3$ law of Chapter 1.

## 17.3 Discretization

Over one IMU step the error dynamics are discretized as in Section 11.2 (AGENTS.md F2):

$$\Phi \approx I_{15} + F_c\Delta t, \qquad Q_c = \mathrm{diag}\left(\sigma_a^2 I_3,\ \sigma_g^2 I_3,\ \sigma_{b_a}^2 I_3,\ \sigma_{b_g}^2 I_3\right), \qquad Q_d \approx G_c Q_c G_c^{\mathsf{T}} \Delta t, \tag{17.4}$$

with $F_c$ and $G_c$ evaluated at the nominal state and the bias-corrected IMU inputs at the beginning of the step (or at the midpoint, consistently with the chosen integration scheme). The densities are the continuous-time values of Table 15.2; the $\Delta t$ in $Q_d$ converts them into variances accumulated during the step.

***Remark* 17.3** (higher-order options)**.** $F_c$ is block upper-triangular with a large nilpotent part, so $\exp(F_c\Delta t)$ has a closed form. In particular the attitude block of the exact $\Phi$ is a rotation matrix, while the first-order block is not exactly orthogonal. At 200 Hz and 1 rad/s the difference per step is about $(\|\hat{\omega}\|\Delta t)^2/2 \approx 10^{-5}$, below the noise. Adopting a higher-order $\Phi$ is allowed if it is logged (AGENTS.md F2). Van Loan's method (Proposition 11.3) gives exact reference values for testing whichever form is used. The closed-form blocks are listed with the solutions in Appendix E.2.

**The continuous-time view.** The discrete recursion is a numerical integration of a differential equation for the covariance. For the linear stochastic system $\dot{\delta x} = F_c\,\delta x + G_c\,w$, the covariance obeys the Lyapunov differential equation of Proposition 6.5,

$$\dot{P} = F_c P + P F_c^{\mathsf{T}} + G_c Q_c G_c^{\mathsf{T}}. \tag{17.5}$$

Substituting $\Phi = I + F_c\Delta t$ and $Q_d = G_c Q_c G_c^{\mathsf{T}}\Delta t$ into one step gives $\Phi P \Phi^{\mathsf{T}} + Q_d = P + \big(F_c P + P F_c^{\mathsf{T}} + G_c Q_c G_c^{\mathsf{T}}\big)\Delta t + F_c P F_c^{\mathsf{T}}\Delta t^2$: the filter's propagation is Euler's method applied to (17.5), with a local error of $O(\Delta t^2)$. Each term has a meaning. $G_c Q_c G_c^{\mathsf{T}}$ injects uncertainty where the noise enters (velocity, attitude and the biases), and $F_c P + P F_c^{\mathsf{T}}$ transports it along the couplings of $F_c$: from biases into attitude and velocity, from attitude into velocity, from velocity into position. The growth laws of Proposition 17.4 below are exact solutions of (17.5) for a level, stationary IMU, and they are the reference against which the discrete propagation is tested in Milestone 5.

## 17.4 Propagating the full covariance

With $N$ clones the state has dimension $n = 15 + 6N$, and the covariance is partitioned as

$$P = \begin{bmatrix} P_{II} & P_{IC} \\ P_{CI} & P_{CC} \end{bmatrix}, \qquad P_{II} \in \mathbb{R}^{15\times 15},\ P_{IC} \in \mathbb{R}^{15\times 6N},\ P_{CC} \in \mathbb{R}^{6N\times 6N}. \tag{17.6}$$

Clones are frozen copies of past poses, so their error dynamics are zero: $\dot{\delta x}_C = 0$. The full transition matrix is $\mathrm{blkdiag}(\Phi, I_{6N})$, and the full process noise is $\mathrm{blkdiag}(Q_d, 0)$. Multiplying out:

**Frozen convention: covariance propagation, AGENTS.md F2**

$$P_{II} \leftarrow \Phi P_{II}\Phi^{\mathsf{T}} + Q_d, \qquad P_{IC} \leftarrow \Phi P_{IC}, \qquad P_{CI} = P_{IC}^{\mathsf{T}}, \qquad P_{CC} \text{ unchanged}, \tag{17.7}$$

followed by $P \leftarrow \frac{1}{2}(P + P^{\mathsf{T}})$.

The block form is not only a convenience. Updating only the affected blocks costs $O(15^2 \cdot 6N)$ per step instead of $O(n^3)$, and it never touches the large $P_{CC}$ block between images. The cross-covariance $P_{IC}$ is what remembers that the clones and the current state share a history. It is what lets a visual constraint between two past poses correct the current velocity and biases.

**Implementation note: allocation-free propagation**

$P$ is a fixed-*max*-size Eigen matrix (Chapter 30). Write the block updates with `.noalias()` into preallocated member workspaces, e.g. a $15\times 15$ temporary for $\Phi P_{II}$ and a $15\times 6N_{max}$ temporary for $\Phi P_{IC}$, because the product reads the block it overwrites. Avoid `auto` with Eigen expressions.

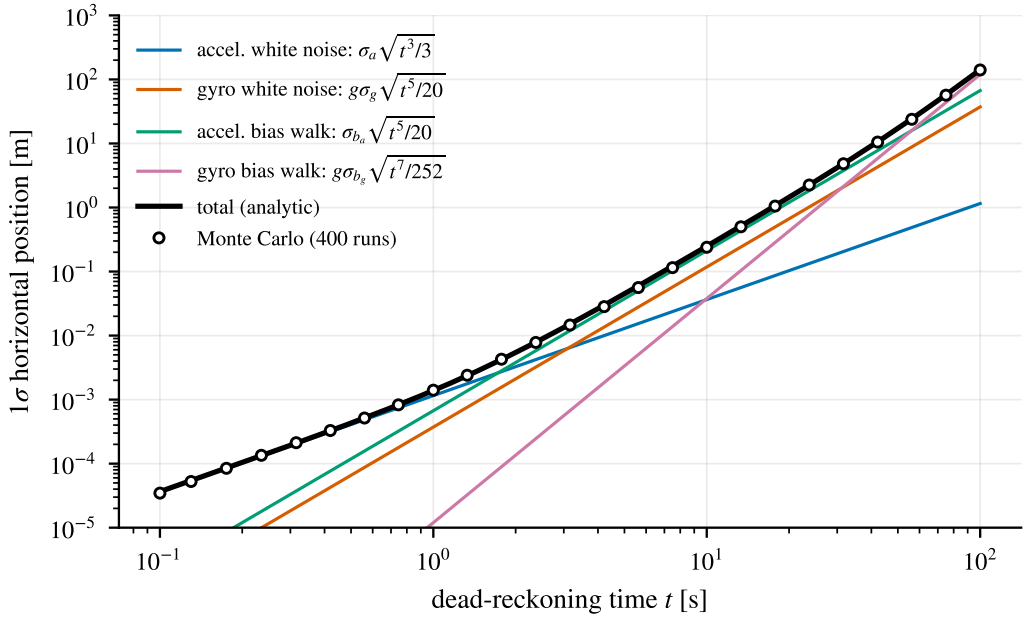



**Figure 17.1:** Horizontal position standard deviation of a dead-reckoning IMU with EuRoC noise parameters, from (17.8), with a Monte Carlo check (400 runs of the discretized error equations at 200 Hz). Accelerometer white noise dominates for the first two seconds, the accelerometer bias walk from there to about a minute, and then the gyro bias walk takes over with its $t^{7/2}$ growth.

## 17.5 How uncertainty grows

The structure of $F_c$ explains how quickly an IMU-only solution degrades. Consider a level, stationary IMU, and one horizontal axis. Three couplings act in cascade.

- A gyro error (white noise or bias error) integrates into a tilt error $\delta\theta$.
- A tilt of $\delta\theta$ rotates the measured reaction to gravity, producing a horizontal specific-force error of magnitude $g\,\delta\theta$, which integrates into velocity error.
- Velocity error integrates into position error.

Each noise source therefore reaches position after a known number of integrations, and Proposition 6.4 gives its contribution to the position variance directly.

**Proposition 17.4** (Dead-reckoning growth laws). *For a level, stationary IMU with zero initial uncertainty, the horizontal position variance grows as*

$$\sigma_p^2(t) = \underbrace{\frac{\sigma_a^2 t^3}{3}}_{\text{accel. white}} + \underbrace{\frac{g^2\sigma_g^2 t^5}{20}}_{\text{gyro white}} + \underbrace{\frac{\sigma_{b_a}^2\, t^5}{20}}_{\text{accel. bias walk}} + \underbrace{\frac{g^2\sigma_{b_g}^2\, t^7}{252}}_{\text{gyro bias walk}}. \tag{17.8}$$

*Proof.* Accelerometer white noise is integrated twice ($m = 2$ in Proposition 6.4). Gyro white noise is integrated once into tilt, scaled by $g$, and integrated twice more ($m = 3$). The accelerometer bias random walk is itself integrated white noise, then integrated twice ($m = 3$). The gyro bias random walk adds one more integration ($m = 4$). The sources are independent,

so their variances add. ■

Figure 17.1 evaluates (17.8) with EuRoC's parameters. After one second of blind flight the position uncertainty is about 1 mm, after ten seconds about 25 cm, and after a minute more than 10 m. The camera's job is to keep the filter permanently in the left part of this plot.

**Project link: Milestone 5**

The analytic check of M5 isolates the first term of (17.8): with $P_0 = 0$, only accelerometer noise and a fixed orientation, the horizontal position variance must equal $\sigma_a^2 t^3/3$. Because $\Phi$ and $Q_d$ are first-order approximations, the agreement improves as $\Delta t \to 0$ (Example 11.2), and the test tolerance should reflect that.

**Why diagonal entries need not grow monotonically.** The attitude covariance is expressed in body axes (Remark 8.15). When the vehicle rotates, the attitude block of $\Phi$ rotates the covariance between axes, so an individual diagonal entry can shrink during pure propagation even though no information is gained. Monotonicity holds for invariant quantities, such as the eigenvalues of $P_{\theta\theta}$ when the vehicle is not rotating, but not for individual entries.

## 17.6 Validating covariance propagation

Two independent tests catch nearly all propagation bugs.

**Finite differences on the discrete propagation.** The Jacobian of one step of the nominal integrator, computed numerically with $\boxplus/\boxminus$, must match $\Phi$ column by column (the derivation exercise above). This catches sign errors, transposes, and blocks placed at wrong indices. The test must use a non-trivial state.

**Monte Carlo.** Simulate $M$ noisy IMU sequences from a known trajectory, integrate each with the nominal equations from a perturbed initial state drawn from $P_0$, and compute the errors $e^{(j)} = x_{\text{true}} \boxminus \hat{x}^{(j)}$. Their sample covariance must agree with the propagated $P$. If the filter is correct, the ratio of a sample variance to the predicted variance is distributed as $\chi^2_{M-1}/(M-1)$, so for $M = 500$ it should lie in $[0.88, 1.13]$ with 95% probability for each diagonal entry. Larger deviations, or many entries near the bounds in the same direction, indicate an error in $G_c$, $Q_c$ or the units. This catches errors that finite differences cannot, such as a wrong noise density or a missing $\Delta t$.

**Key takeaways**

- The error state is 15-dimensional with the frozen layout $[\delta p, \delta v, \delta\theta, \delta b_a, \delta b_g]$.
- Error dynamics follow from substituting $x = \hat{x} \boxplus \delta x$, subtracting the nominal dynamics, and keeping first-order terms. The perturbation convention changes the result.
- $\Phi \approx I + F_c\Delta t$, $Q_d \approx G_c Q_c G_c^{\mathsf{T}} \Delta t$ with continuous densities; clones have identity dynamics.

- Position variance grows like $t^3$ (accel. noise), $t^5$ (gyro noise, accel. bias walk) and $t^7$ (gyro bias walk).
- Validate $\Phi$ by finite differences and $P$ by Monte Carlo with statistically justified bounds.

## Exercises

**17.1** Derive the velocity error dynamics for the global perturbation, and compare its structure with your local result. Which one depends on the vehicle's heading?

**17.2** Using your $F_c$, show that $\delta\theta$ is decoupled from $\delta p$ and $\delta v$, and explain this from the cascade structure.

**17.3** Starting from (17.4), write $Q_d$ block by block and check its units.

**17.4** Implement covariance propagation for the 15-state system in Python and reproduce Figure 17.1, including the Monte Carlo points.

**17.5** For a vehicle rotating about its $z$-axis at 1 rad/s with $P_{\theta\theta} = \mathrm{diag}(10^{-4}, 10^{-6}, 10^{-6})$, propagate $P_{\theta\theta}$ for a quarter turn with no noise and observe the diagonal entries.

**17.6** How large must $M$ be for a Monte Carlo variance check to detect a 10% error in $\sigma_a$ with high probability?

## Solutions to the exercises

**17.1** With $R = \mathrm{Exp}(\delta\theta_g)\hat{R} \approx (I + [\delta\theta_g]_\times)\hat{R}$ and $a_m - b_a - n_a = \hat{a} - \delta b_a - n_a$, substituting into $\dot{v} = R(a_m - b_a - n_a) + g_w$, subtracting $\dot{\hat{v}} = \hat{R}\hat{a} + g_w$ and dropping second-order products gives

$$\dot{\delta v} = [\delta\theta_g]_\times \hat{R}\hat{a} - \hat{R}\,\delta b_a - \hat{R}\,n_a = -[\hat{R}\hat{a}]_\times\,\delta\theta_g - \hat{R}\,\delta b_a - \hat{R}\,n_a.$$

The local result is $\dot{\delta v} = -\hat{R}[\hat{a}]_\times\delta\theta - \hat{R}\,\delta b_a - \hat{R}\,n_a$; the two agree through $\delta\theta_g = \hat{R}\,\delta\theta$ and $[\hat{R}\hat{a}]_\times = \hat{R}[\hat{a}]_\times\hat{R}^\mathsf{T}$. In the velocity row both forms contain $\hat{R}$, because the velocity error lives in the world frame. The difference is in the attitude row: the global error obeys $\dot{\delta\theta}_g = -\hat{R}\,\delta b_g - \hat{R}\,n_g$ (Example 17.2), which depends on the heading through $\hat{R}$, while the local error obeys $\dot{\delta\theta} = -[\hat{\omega}]_\times\delta\theta - \delta b_g - n_g$, which does not. With the local perturbation the attitude-and-bias part of the error model is independent of where the vehicle points (Section 8.9).

**17.2** The attitude row of $F_c$ is $[\,0\;\;0\;\;-[\hat{\omega}]_\times\;\;0\;\;-I\,]$ in the order $(\delta p, \delta v, \delta\theta, \delta b_a, \delta b_g)$: its $\delta p$ and $\delta v$ blocks are zero, so $\delta\theta$ evolves independently of the position and velocity errors. This is the cascade of the kinematics: the attitude is obtained by integrating the gyroscope alone ($\dot{q} = \frac{1}{2}q \otimes [0, \hat{\omega}]$ involves neither $p$ nor $v$), the velocity by integrating the specific force rotated by the attitude, and the position by integrating the velocity. Errors flow downstream only, $\delta b_g \to \delta\theta \to \delta v \to \delta p$ and $\delta b_a \to \delta v$, never upstream, so the blocks above the cascade are zero.

**17.3** With the noise ordering $w = (n_a, n_g, n_{b_a}, n_{b_g})$ the noise-input matrix has the blocks $-\hat{R}$ (velocity, from $n_a$), $-I$ (attitude, from $n_g$), and $I$, $I$ (the two biases). Since $\hat{R}\hat{R}^\mathsf{T} = I$,

$$Q_d \approx G_c Q_c G_c^\mathsf{T}\Delta t = \mathrm{diag}\left(0,\ \sigma_a^2 I,\ \sigma_g^2 I,\ \sigma_{b_a}^2 I,\ \sigma_{b_g}^2 I\right)\Delta t.$$

Units: $\sigma_a^2\Delta t$ is $(\mathrm{m/s^2}/\sqrt{\mathrm{Hz}})^2 \cdot \mathrm{s} = \mathrm{m^2/s^2}$, a velocity variance; $\sigma_g^2\Delta t$ is $\mathrm{rad^2}$, an attitude variance; $\sigma_{b_a}^2\,\Delta t$ is $(\mathrm{m/s^3}/\sqrt{\mathrm{Hz}})^2 \cdot \mathrm{s} = \mathrm{m^2/s^4}$, the variance of an acceleration bias; and $\sigma_{b_g}^2\,\Delta t$ is $\mathrm{rad^2/s^2}$. The position block is zero to first order: noise reaches the position only through the velocity, contributing $\sigma_a^2\Delta t^3/3$ per step at second order (Example 11.2).

**17.4** For a level, stationary IMU each horizontal axis obeys the one-axis chain of Example 11.1: $\dot{\delta p} = \delta v$, $\dot{\delta v} = g\,\delta\theta - \delta b_a - n_a$, $\dot{\delta\theta} = -\delta b_g - n_g$, with random-walk biases. (Your full $F_c$ reduces to two copies of this chain in that configuration, which is a good test of it.) Propagate $P \leftarrow \Phi P \Phi^\mathsf{T} + Q_d$ with $\Phi = I + F\Delta t$ at 200 Hz from $P = 0$ and plot $\sqrt{P_{pp}}$; it follows the analytic total of (17.8). For the Monte Carlo points, simulate $M = 400$ independent realizations of the same discretized equations, drawing $n_a$ and $n_g$ with standard deviations $\sigma/\sqrt{\Delta t}$ and the bias increments with $\sigma_b\sqrt{\Delta t}$ (Section 6.3), and record the sample standard deviation of $\delta p$ at logarithmically spaced times. With 400 runs the points scatter by about ±7% around the curve. The code is `fig_cov_growth` in `scripts/make_figures.py`.

**17.5** With no new information the world-frame attitude covariance $\hat{R}P_{\theta\theta}\hat{R}^\mathsf{T}$ does not change; only the body axes in which $P_{\theta\theta}$ is expressed turn (Remark 8.15). After a quarter turn

about $z$, $\hat{R}(t) = \hat{R}(0)R_z(90°)$ and

$$P_{\theta\theta}(t) = R_z(90°)^{\mathsf{T}}\ \mathrm{diag}(10^{-4}, 10^{-6}, 10^{-6})\, R_z(90°) = \mathrm{diag}(10^{-6}, 10^{-4}, 10^{-6})\,:$$

the large and a small diagonal entry have swapped. Along the way, at 45°, the matrix has equal diagonal entries $5.05 \times 10^{-5}$ and an off-diagonal entry of $\pm 4.95 \times 10^{-5}$. Individual diagonal entries are not monotonic even without noise; the trace and the eigenvalues are constant. A test that requires each diagonal entry of $P$ to grow during propagation is therefore wrong (Milestone 5).

**17.6** A 10% error in $\sigma_a$ is a 21% (or, for −10%, 19%) error in the predicted variance. With $M$ runs, $(M-1)s^2/\sigma^2 \sim \chi^2_{M-1}$ under a correct prediction, and the test rejects when $s^2/\sigma^2$ leaves $[\chi^2_{0.025}(M-1), \chi^2_{0.975}(M-1)]/(M-1)$. The probability of rejecting when the true ratio is 1.21 (or 0.81) is the power of the test; computing it from the $\chi^2$ distribution gives:

| runs $M$ | 100 | 200 | 500 | 700 |
|---|---|---|---|---|
| power against $\sigma_a$ 10% too small (ratio 1.21) | 0.29 | 0.50 | 0.86 | 0.95 |
| power against $\sigma_a$ 10% too large (ratio 0.81) | 0.28 | 0.53 | 0.91 | 0.98 |

Detecting a 10% error with 95% probability takes 600 runs if $\sigma_a$ is too large and 720 if it is too small (by the normal approximation, the interval half-width $1.96\sqrt{2/M}$ plus 1.645 times the alternative's spread must be below 0.21). Two practical remedies: test several independent quantities at once (the three axes, several times along the trajectory), which multiplies the effective number of samples, and use larger errors when the purpose is only to show that the test can fail.

Part IV

# The Error-State Filter in Practice

Chapter 18

# Measurement Updates, Gating and the Pose Sensor

**In this chapter**

- Apply the generic manifold update to concrete sensors, deriving $H$ by the elementary Jacobians.
- Understand which state directions a measurement observes, from the nullspace of $H$.
- Implement the mock pose sensor of Milestone 6 and derive its Jacobian.
- Gate measurements with the $\chi^2$ test, and understand how gating fails in an overconfident filter.
- Understand how a pose sensor makes velocity and biases observable.

## 18.1 The generic update

**Frozen convention: measurement update, AGENTS.md F3**

1. Residual $r = z \boxminus h(\hat{x})$: plain subtraction for vector measurements; for the pose measurement $r = [\, p_{meas} - \hat{p};\ \mathrm{Log}_q(\hat{q}^{-1} \otimes q_{meas}) \,]$.
2. $H = \partial r / \partial \delta x$ at $\delta x = 0$ using C4 (Section 14.4), derived by hand and verified by finite differences.
3. $S = HPH^\mathsf{T} + R_z$; $K = PH^\mathsf{T}S^{-1}$ by a Cholesky/LDL$^\mathsf{T}$ solve, never an explicit inverse.
4. Mahalanobis gate $r^\mathsf{T}S^{-1}r < \chi^2_{0.95}(\dim r)$ from a `constexpr` table. Rejections are counted and logged, never silently dropped.
5. Joseph form $P \leftarrow (I - KH)P(I - KH)^\mathsf{T} + KR_zK^\mathsf{T}$, then injection and reset (Section 14.5).

Everything specific to a sensor is in $h$ and $H$. The rest of this section derives them for two sensors that the project does not use, to demonstrate the technique, before turning to the pose sensor it does use.

## 18.2 Worked example: position with a lever arm

A GNSS antenna mounted at a known offset $\ell_b$ from the IMU, expressed in the body frame, measures the antenna position:

$$z = h(x) + n = p_{wb} + R_{wb}\,\ell_b + n, \qquad n \sim \mathcal{N}(0, \sigma^2 I_3). \tag{18.1}$$

The residual is a plain difference, $r = z - (\hat{p} + \hat{R}\ell_b)$. To find $H$, perturb the nominal state with $\boxplus$ and expand:

$$h(\hat{x} \boxplus \delta x) = \hat{p} + \delta p + \hat{R}\,\mathrm{Exp}(\delta\theta)\ell_b \approx \hat{p} + \delta p + \hat{R}\ell_b + \hat{R}[\delta\theta]_\times \ell_b = h(\hat{x}) + \delta p - \hat{R}[\ell_b]_\times \delta\theta.$$

Reading off the coefficients (the rotation-action row of Table 8.1),

$$H = \begin{bmatrix} I_3 & 0_3 & -\hat{R}[\ell_b]_\times & 0_3 & 0_3 \end{bmatrix}. \tag{18.2}$$

The attitude column is non-zero because the antenna swings around the IMU when the body rotates. A lever-arm position measurement therefore carries attitude information, but only about rotations that move the antenna: the nullspace of $-\hat{R}[\ell_b]_\times$ is the direction $\ell_b$, since rotating about the lever arm itself does not move the antenna.

## 18.3 Worked example: a direction sensor

A magnetometer, or an accelerometer used as an inclinometer at rest, measures a known world vector $m_w$ in body coordinates:

$$z = R_{wb}^\mathsf{T} m_w + n. \tag{18.3}$$

With the inverse-action row of Table 8.1, $h(\hat{x} \boxplus \delta x) = \mathrm{Exp}(-\delta\theta)\hat{R}^\mathsf{T} m_w \approx \hat{R}^\mathsf{T} m_w + [\hat{R}^\mathsf{T} m_w]_\times \delta\theta$, so

$$H = \begin{bmatrix} 0_3 & 0_3 & [\hat{R}^\mathsf{T} m_w]_\times & 0_3 & 0_3 \end{bmatrix}. \tag{18.4}$$

$[v]_\times$ has rank two and nullspace $\mathrm{span}(v)$, so a direction measurement observes two of the three attitude degrees of freedom. The rotation about the measured direction is unobservable. For gravity this is the familiar statement that an accelerometer at rest gives roll and pitch but not yaw.

**Key idea: the nullspace of $H$ tells you what a sensor cannot see**

Any error direction $\delta x \in \mathrm{null}(H)$ produces no change in the predicted measurement, so the update cannot correct it. Reading the nullspace of each new $H$ is a quick sanity check of both the derivation and your intuition about the sensor.

## 18.4 The pose sensor of Milestone 6

Before introducing a camera, the project tests the whole ESKF with a "mock sensor" that measures the pose directly. Ground-truth poses, decimated to about 10 Hz, are corrupted with synthetic noise of known statistics.

**Frozen convention: pose measurement, AGENTS.md C6**

$$p_{meas} = p_{wb} + n_p, \qquad q_{meas} = q_{wb} \otimes \mathrm{Exp}_q(n_\theta), \qquad R_z = \mathrm{diag}(\sigma_p^2 I_3,\ \sigma_\theta^2 I_3). \tag{18.5}$$

The attitude noise is applied on the right, in the body frame, which is exactly the local perturbation. That choice makes the residual (14.3) statistically clean: if the nominal state were exact, the attitude residual would be exactly $n_\theta$. To generate the noise, draw $n_p$ and $n_\theta$ from seeded `std::mt19937_64` generators (AGENTS.md E5) with the same $\sigma_p$, $\sigma_\theta$ that appear in $R_z$.

**Derivation exercise (project Jacobian): the pose measurement Jacobian $H \in \mathbb{R}^{6\times 15}$**

Using (14.4), derive $H$ for $h(x) = (p_{wb}, q_{wb})$ with the residual of AGENTS.md F3.

1. The position rows are a plain difference. Which state blocks does $\hat{p} + \delta p$ depend on?
2. For the attitude rows, evaluate $\mathrm{Log}_q\left(\hat{q}^{-1} \otimes (\hat{q} \otimes \mathrm{Exp}_q(\delta\theta))\right)$ and simplify. Which elementary Jacobian applies if you instead linearize around a non-zero residual?
3. Write $H$ in the frozen column order and state its nullspace. Which states are *not* directly measured, and how can they still be corrected?

**Check:** the finite-difference test of $r(\delta x) = h(\hat{x} \boxplus \delta x) \boxminus h(\hat{x})$ at a non-trivial state, as required by Milestone 6.

*Worked solution: Appendix E.3 (page 351).*

**How unmeasured states get corrected.** The pose sensor measures neither velocity nor biases, yet the update corrects both. The mechanism is the cross-covariance built up by propagation. Between updates, a velocity error produces a growing position error, so $P_{pv}$ becomes large; an accelerometer bias produces a velocity error and then a position error, so $P_{pb_a}$ grows; a gyro bias produces an attitude error, so $P_{\theta b_g}$ grows. The gain $K = PH^\mathsf{T}S^{-1}$ has non-zero rows for every state correlated with the measured ones, so each pose update corrects them in proportion to those correlations.

**Why the biases converge.** Observability here has an intuitive reading. The gyro bias is the slope of the difference between the integrated gyro and the measured attitude, which a sequence of attitude measurements reveals. The velocity is the slope of the measured position. The accelerometer bias is the difference between the acceleration implied by successive velocities and the specific force rotated with the (measured) attitude, so it too becomes observable. Even at rest it is separable from tilt, because the attitude is measured directly. With pose measurements every state of the IMU error state is observable, and their covariances converge.

## 18.5 Gating

Real measurements include outliers: a misassociated feature, a reflection, a moving object. A single outlier with a large residual can drag the estimate far away and corrupt the covariance.

The $\chi^2$ test of Proposition 12.3 rejects measurements that are statistically implausible given the filter's own uncertainty:

$$\gamma = r^{\mathsf{T}} S^{-1} r \overset{?}{<} \chi^2_{1-\alpha}(\dim r). \tag{18.6}$$

| $\dim r$ | 1 | 2 | 3 | 4 | 5 | 6 |
|---|---|---|---|---|---|---|
| $\chi^2_{0.95}$ | 3.841 | 5.991 | 7.815 | 9.488 | 11.070 | 12.592 |
| $\chi^2_{0.99}$ | 6.635 | 9.210 | 11.345 | 13.277 | 15.086 | 16.812 |

**Table 18.1:** Gate thresholds. A longer table, up to 600 degrees of freedom, is in Appendix C.

With a 95% gate, a consistent filter rejects 5% of perfectly good measurements. That is the price of rejecting most outliers, and it is why rejections are counted and logged: a rejection rate close to 5% is a sign of health, a rate near zero suggests an underconfident filter (or a gate that is too loose to be useful), and a rate far above 5% indicates overconfidence or a model error.

**Pitfall: the death spiral**

Gating assumes the filter is consistent. If $P$ is too small, good measurements produce large $\gamma$ and are rejected; with no corrections $P$ should grow, but if the model's process noise is also too small it grows slowly while the true error grows quickly, and more measurements are rejected. The filter then dead-reckons with false confidence until it diverges. When the rejection rate jumps, suspect overconfidence before suspecting outliers.

The threshold depends on the dimension of $r$. A pose measurement uses $\chi^2_{0.95}(6)$, a single image observation $\chi^2_{0.95}(2)$, and a projected MSCKF feature residual $\chi^2_{0.95}(2M-3)$, where $M$ is the number of observations (Chapter 26). Because the quantiles grow with the dimension, the table is generated offline and stored as a `constexpr` array, which avoids depending on a statistics library in the core.

## 18.6 Pseudo-measurements and timing

**Pseudo-measurements.** Knowledge that is not a sensor reading can be fed to the filter as if it were one. The most useful is the *zero-velocity update* (ZUPT): when the vehicle is known to be at rest (detected, for example, from a very small variance of the accelerometer and gyroscope readings over a window), apply the measurement $z = 0 = v_{wb} + n$ with $H = [0\ \ I_3\ \ 0\ \ 0\ \ 0]$ and a small noise covariance. It stops velocity drift, and through the correlations it also refines tilt and biases. A ZUPT applied when the vehicle is in fact moving is a large, confident, wrong measurement; the detection must be conservative. Similar pseudo-measurements express a known constant altitude, a non-holonomic constraint (a car does not slide sideways), or a known landmark.

**Measurement timing.** A measurement taken at time $t_z$ must be applied to the state at $t_z$, after propagating exactly to that time (Chapter 16). Measurements that arrive *late*, after the

filter has already propagated past their timestamp, are a problem for every filter: either the filter buffers the IMU data and re-propagates from $t_z$, or it uses a stochastic clone of the state at $t_z$ (Chapter 25), which is exactly the MSCKF's approach for camera measurements. On EuRoC, data are processed offline in timestamp order, so late measurements do not occur.

## 18.7 Testing the update

**Project link: Milestone 6**

The exit criteria test properties that hold for any correct implementation:

- $H$ passes the finite-difference test at a non-trivial state;
- $P_{prior} - P_{post}$ is positive semi-definite (an update never adds uncertainty);
- after injection and reset all quaternions are unit, and a second update with the same $z$ produces a residual consistent with the first correction;
- as $R_z \to 0$ the posterior pose converges to $z$;
- with constant synthetic biases, the bias estimates converge to within their own $3\sigma$;
- update, injection and reset do not allocate;
- a full MH_01 run with noisy ground-truth updates neither diverges nor produces NaN, and the $\chi^2$ rejection count is logged.

The "second update" test is subtle and worth understanding. After the first update, the nominal pose has moved toward $z$ by $Kr$, so the second residual should be approximately $(I - HK)r$, which is smaller. If it is instead larger, or has the opposite sign, the injection used the wrong side of the quaternion product or the wrong sign of $H$.

**Key takeaways**

- Derive $H$ by perturbing $h(\hat{x} \boxplus \delta x)$, expanding to first order and reading off coefficients.
- The nullspace of $H$ lists the error directions a sensor cannot see.
- The pose sensor's attitude noise is a local perturbation, matching the residual $\mathrm{Log}_q(\hat{q}^{-1} \otimes q_{meas})$.
- Unmeasured states are corrected through cross-covariances built up by propagation.
- Gate with $\chi^2_{0.95}(\dim r)$, log the rejections, and treat a high rejection rate as a symptom of overconfidence.

## Exercises

**18.1** For the lever-arm example, compute $S$ and $K$ for a state with

$$P = \mathrm{diag}(\sigma_p^2 I,\ \sigma_v^2 I,\ \sigma_\theta^2 I,\ \sigma_{b_a}^2 I,\ \sigma_{b_g}^2 I).$$

Which components of $\delta\theta$ does the update correct?

**18.2** Derive $H$ for a range measurement to a known beacon $b_w$: $z = \|p_{wb} - b_w\| + n$. What is its nullspace?

**18.3** Simulate the death spiral: run a 1D constant-velocity filter with $Q$ underestimated by a factor of 100 and a 95% gate. Plot the rejection rate and the error over time.

**18.4** Show that with a pose measurement of a static vehicle, the horizontal accelerometer bias is observable. (Hint: what does the attitude measurement remove from the tilt/bias ambiguity of Chapter 16?)

**18.5** Prove that $P_{prior} - P_{post} = KSK^\mathsf{T} \succeq 0$ for the optimal gain, and explain why this test can fail in floating point if the simple covariance update is used.

## Solutions to the exercises

**18.1** With $H = [\, I_3 \;\; 0 \;\; -\hat{R}[\ell_b]_\times \;\; 0 \;\; 0 \,]$ and the block-diagonal $P$, only the position and attitude blocks contribute:

$$S = \sigma_p^2 I + \sigma_\theta^2 \hat{R}[\ell_b]_\times [\ell_b]_\times^\mathsf{T} \hat{R}^\mathsf{T} + \sigma^2 I = \alpha\, I - \sigma_\theta^2\, (\hat{R}\ell_b)(\hat{R}\ell_b)^\mathsf{T}, \qquad \alpha = \sigma_p^2 + \sigma^2 + \sigma_\theta^2 \|\ell_b\|^2,$$

using $[\ell]_\times [\ell]_\times^\mathsf{T} = -[\ell]_\times^2 = \|\ell\|^2 I - \ell\ell^\mathsf{T}$. The gain blocks are $K_p = \sigma_p^2 S^{-1}$, $K_\theta = \sigma_\theta^2 (-\hat{R}[\ell_b]_\times)^\mathsf{T} S^{-1} = \sigma_\theta^2 [\ell_b]_\times \hat{R}^\mathsf{T} S^{-1}$, and zero for velocity and biases. Since $S^{-1}(\hat{R}\ell_b) \propto \hat{R}\ell_b$ and $[\ell_b]_\times \hat{R}^\mathsf{T} \hat{R}\ell_b = 0$, the attitude gain simplifies to

$$K_\theta = \frac{\sigma_\theta^2}{\sigma_p^2 + \sigma^2 + \sigma_\theta^2 \|\ell_b\|^2}\, [\ell_b]_\times \hat{R}^\mathsf{T}.$$

Its range is the range of $[\ell_b]_\times$: the update corrects only the attitude components perpendicular to the lever arm, never the rotation about $\ell_b$ itself, which does not move the antenna. Velocity and biases are not corrected here because this prior has no cross-covariances; after some propagation they would be.

**18.2** With $h(x) = \|p - b_w\|$ and $\hat{\rho} = \|\hat{p} - b_w\|$, perturbing $p = \hat{p} + \delta p$ gives $h \approx \hat{\rho} + u^\mathsf{T} \delta p$ with $u = (\hat{p} - b_w)/\hat{\rho}$, so

$$H = [\, u^\mathsf{T} \;\; 0 \;\; 0 \;\; 0 \;\; 0 \,] \in \mathbb{R}^{1 \times 15}.$$

Its nullspace is 14-dimensional: the two position directions perpendicular to the line of sight (moving on the sphere around the beacon), and all velocity, attitude and bias errors. One range observes one number; position perpendicular to the line of sight becomes observable only through several beacons or through motion and the correlations it builds.

**18.3** Simulate a constant-velocity target (acceleration density $\sqrt{0.5}$, position measurements at 10 Hz with unit variance) and run the filter with $Q$ divided by 100 and a $\chi^2_{0.95}(1)$ gate. Typical results, per 30-second window:

| filter | rejection rate | RMS position error |
|---|---|---|
| correct $Q$, gated | 2–8% | 0.4–0.65 m |
| $Q/100$, gated | 79%, then 100% | 26, 126, 243, . . . , 3246 m |
| $Q/100$, not gated | 0% | 0.8–1.7 m |

The overconfident filter predicts innovations that are far too small, so good measurements fail the gate; each rejection removes the correction the filter needed, the error grows, more measurements are rejected, and within half a minute the filter ignores all data and dead-reckons. Its reported $\sigma$ (about 200 m at the end) stays far below its actual error. Without the gate the same mistuned filter is merely suboptimal: its error stays bounded. A rejection rate far above the design value is the alarm signal (Section 18.5).

**18.4** At rest, the accelerometer measures $\hat{R}^\mathsf{T}(-g_w) + b_a$, and to first order a tilt error and a horizontal bias change this reading in the same way: in the velocity error dynamics both enter through the horizontal specific-force error, so from accelerations alone

only their combination is observable (Chapter 16). With a pose sensor, the position measurements make the velocity error and its rate observable (two differentiations, as in Section 11.4), while the attitude measurement observes $\delta\theta$ directly. The rate of the velocity error is (tilt term) + (bias term); with the tilt term known from the attitude measurement, the bias term, and hence the horizontal bias, is determined. The vertical bias was observable already (it changes the measured magnitude of gravity, which the position measurements expose), and the gyro bias is observable from the drift of the attitude between measurements. With a pose sensor, every IMU state is observable, which is why the covariances converge in Milestone 6.

**18.5** For the optimal gain, $P_{\text{prior}} - P_{\text{post}} = KHP = KSK^{\mathsf{T}}$ (Theorem 12.1), and $KSK^{\mathsf{T}} \succeq 0$ because it is a congruence of $S \succ 0$ (Proposition 2.29). In floating point the simple update $P_{\text{post}} = (I - KH)P$ is neither symmetric nor guaranteed PSD (Exercise 12.3), and $P_{\text{prior}} - P_{\text{post}}$ then has rounding-level asymmetry and can have slightly negative eigenvalues, notably in directions the measurement does not observe, where the true difference is exactly zero and the computed one is $\pm u\|P\|$. A test must therefore symmetrize the difference and allow a tolerance: $\lambda_{\min}\big(\frac{1}{2}(D + D^{\mathsf{T}})\big) \geq -c\,u\,\|P\|$ with a small constant $c$. Using the Joseph form and symmetrizing after each update makes $P_{\text{post}}$ itself PSD, but the difference still needs the tolerance.

Chapter 19

# Consistency and Evaluation

**In this chapter**

- Test whether a filter's covariance tells the truth, with NEES, NIS and $3\sigma$ coverage.
- Compute exact statistical bounds for single-run and Monte Carlo tests.
- Diagnose over- and under-confidence and tune noise parameters without cheating.
- Measure trajectory accuracy with ATE and RPE, using the alignment appropriate for VIO.

A filter produces two things: an estimate and a covariance. Most evaluations look only at the first. But a filter with good average accuracy and a covariance that is too small is dangerous: it rejects valid measurements, it reports false confidence to whatever consumes its output, and it eventually diverges. This chapter is about checking the second output.

## 19.1 What consistency means

Recall from Chapter 5 that a filter reporting $(\hat{x}_k, P_k)$ is consistent if its error $e_k = x_k \boxminus \hat{x}_k$ has zero mean and covariance $P_k$. Together with Proposition 12.3, a consistent, correctly modeled filter satisfies three testable properties:

1. estimation errors are compatible with $P_k$ (tested with NEES, needs ground truth);
2. innovations are compatible with $S_k$ (tested with NIS, needs no ground truth);
3. innovations are white (tested with autocorrelation, needs no ground truth).

The error must be computed with the manifold difference $\boxminus$, using exactly the same convention as the filter's covariance. Comparing a local-perturbation covariance with a global attitude error, or with an Euler angle difference, produces meaningless statistics.

## 19.2 Normalized estimation error squared

**Definition 19.1** (NEES). The normalized estimation error squared at time $k$ is

$$\epsilon_k = e_k^\mathsf{T} P_k^{-1} e_k, \qquad e_k = x_k \boxminus \hat{x}_k. \tag{19.1}$$

If the filter is consistent and its errors are Gaussian, $\epsilon_k \sim \chi^2_n$ with $n = \dim e$ by Theorem 5.17: its expected value is $n$. A single run gives one sample per time step, which is noisy. Monte Carlo runs average it out. With $N$ independent runs, the average NEES $\bar{\epsilon}_k = \frac{1}{N}\sum_{j=1}^{N} \epsilon_k^{(j)}$

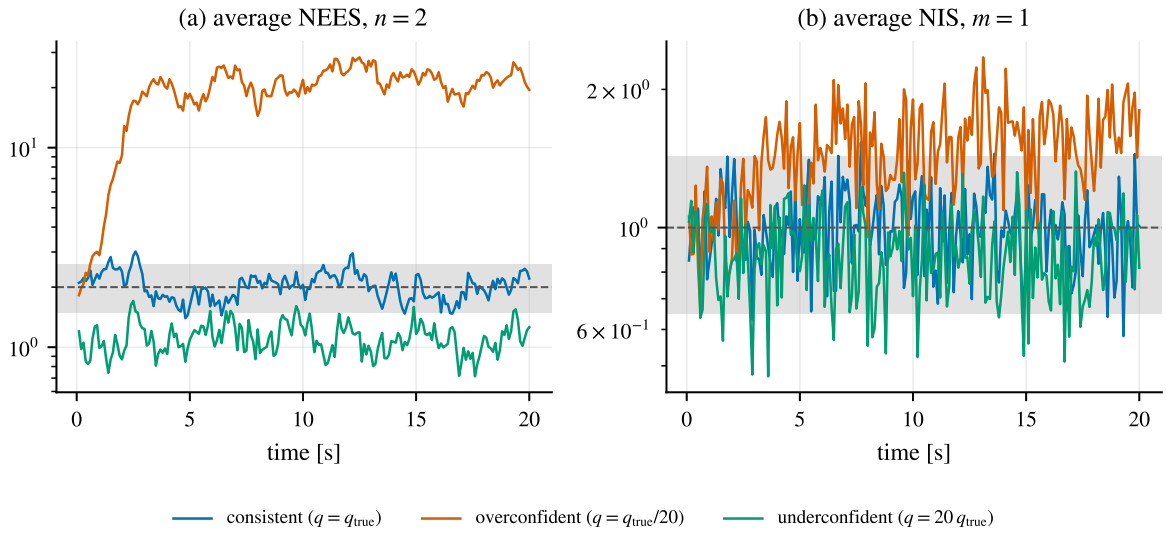



**Figure 19.1:** Consistency statistics of a constant-velocity filter over 50 Monte Carlo runs, with the 95% acceptance region (gray) of (19.2). Underestimating the process noise by a factor of 20 makes the filter overconfident: the NEES leaves the region by an order of magnitude, and the NIS rises above it. Overestimating it makes the filter underconfident: the NEES falls below the region. Note that the NIS of the underconfident filter is less clearly abnormal: NIS alone is a weak detector of underconfidence.

satisfies $N\bar{\epsilon}_k \sim \chi^2_{Nn}$, so the two-sided 95% interval is

$$\left[ \frac{\chi^2_{0.025}(Nn)}{N}, \frac{\chi^2_{0.975}(Nn)}{N} \right]. \tag{19.2}$$

For the 15-state IMU filter with $N = 50$ runs this is $[13.52, 16.56]$; for $N = 100$, $[13.95, 16.09]$. Appendix C lists more. Average NEES above the interval means overconfidence (errors larger than claimed); below means underconfidence.

**Block NEES.** The NEES of the full state mixes well-estimated and poorly estimated blocks. Computing it separately for position, velocity, attitude and biases, each with its own $3 \times 3$ block of $P$ and $\chi^2_3$ bounds, points directly at the misbehaving part.

## 19.3 Normalized innovation squared

**Definition 19.2** (NIS). $\nu_k = r_k^{\mathsf{T}} S_k^{-1} r_k$, the same quantity the gate computes.

Under consistency $\nu_k \sim \chi^2_m$ with $m = \dim r_k$. NIS needs no ground truth, so it is the main consistency monitor on real data. Two summaries are useful: the fraction of updates with $\nu_k$ below its 95% quantile, which should be close to 95% (Milestone 7), and the time-average of $\nu_k$, which should be close to $m$. If measurements have different dimensions, normalize by $m_k$ or compare each against its own quantile.

| NEES | NIS | Likely causes |
|---|---|---|
| high | high | process noise too small; wrong noise units (missing $\Delta t$ or $\sqrt{\Delta t}$); unmodeled IMU errors; integration error |
| high | normal | errors in directions the measurement does not see (unobservable states, e.g. yaw in VIO); wrong $\boxminus$ convention in the evaluation |
| normal | high | measurement noise too small; outliers passing the gate; wrong $H$ |
| low | low | process or measurement noise too large |
| high, growing | normal | spurious information along unobservable directions (EKF inconsistency, Chapter 29) |
| spikes | spikes | time-synchronization errors; wrong extrinsics; bad initialization |

**Table 19.1:** Reading consistency statistics. Combinations narrow the search for the bug.

$3\sigma$ **coverage.** For each scalar component $i$, a consistent Gaussian error lies within $\pm 3\sqrt{P_{ii}}$ 99.7% of the time. Plotting errors against their $3\sigma$ envelopes is the most readable diagnostic, and the coverage fraction is a simple scalar summary. On EuRoC, Milestone 7 requires at least 95% coverage for velocity and biases. These states are not measured by the pose sensor, so their consistency is not circular.

## 19.4 Diagnosing inconsistency

Table 19.1 is a starting point for debugging. Two additional checks are valuable. First, plot each residual component over time: a non-zero mean reveals a bias (wrong extrinsics, a wrong sign in $h$); slow oscillation reveals correlated errors (a coloured noise the filter assumes white). Second, compare the covariance with Monte Carlo statistics on synthetic data, where the truth is known exactly and the noise is exactly as modeled. If the filter is inconsistent on synthetic data, the bug is in the filter. If it is consistent there but not on real data, the problem is the model.

### 19.4.1 Tuning without cheating

1. **Synthetic first.** With synthetic data generated with exactly the filter's noise parameters, there is nothing to tune: a consistent implementation must pass. Any failure is a bug.
2. **Physically meaningful knobs only.** On real data, adjust the IMU noise densities (start from Table 15.2, inflate modestly for unmodeled effects) and the measurement noise (start from the pixel noise of the detector). Do not add arbitrary noise to arbitrary states.
3. **Judge on consistency, not accuracy.** Choose parameters that make NIS and coverage statistics correct. Lower trajectory error obtained by making the filter inconsistent will not generalize.
4. **Separate tuning from evaluation.** Tune on some sequences and report results on others.
5. **Ground truth never enters the filter** except where explicitly allowed and logged (initialization).

## 19.5 Trajectory accuracy

Consistency says whether the covariance is honest; accuracy says how small the errors are. VIO accuracy is reported with two metrics [50, 56].

### 19.5.1 Absolute trajectory error

The estimated trajectory lives in a world frame that is only defined up to the unobservable directions, so it must be aligned with the ground truth before comparing. Given time-associated positions $p_i$ (ground truth) and $\hat{p}_i$ (estimate), find the transformation that best maps the estimate onto the truth, then compute

$$\mathrm{ATE}_{\mathrm{RMSE}} = \left( \frac{1}{N} \sum_{i=1}^{N} \left\| p_i - (R^\star \hat{p}_i + t^\star) \right\|^2 \right)^{1/2}. \tag{19.3}$$

For rigid alignment, the optimal transformation has a closed form (Kabsch/Umeyama [53]).

**Proposition 19.3** (Optimal rigid alignment). *Let $\mu$ and $\hat{\mu}$ be the means of the two point sets, $a_i = p_i - \mu$ and $b_i = \hat{p}_i - \hat{\mu}$ the centered points, and $\Sigma_{ab} = \frac{1}{N} \sum_i a_i b_i^\mathsf{T} = U D V^\mathsf{T}$ an SVD. The minimizer of $\sum_i \|p_i - (R\hat{p}_i + t)\|^2$ over rotations $R$ and translations $t$ is*

$$R^\star = U \operatorname{diag}\left(1, 1, \det(UV^\mathsf{T})\right) V^\mathsf{T}, \qquad t^\star = \mu - R^\star \hat{\mu}. \tag{19.4}$$

*Proof.* For fixed $R$, the cost is a quadratic in $t$ minimized where its gradient vanishes, $\sum_i (p_i - R\hat{p}_i - t) = 0$, i.e. $t = \mu - R\hat{\mu}$: the alignment maps centroid onto centroid. Substituting, the cost becomes $\sum_i \|a_i - R b_i\|^2 = \sum_i (\|a_i\|^2 + \|b_i\|^2) - 2 \sum_i a_i^\mathsf{T} R b_i$, so we must maximize $\sum_i a_i^\mathsf{T} R b_i = \operatorname{tr}\left(R \sum_i b_i a_i^\mathsf{T}\right) = N \operatorname{tr}(R\, V D U^\mathsf{T}) = N \operatorname{tr}(D\, Z)$ with $Z = U^\mathsf{T} R V$. $Z$ is orthogonal, so its diagonal entries are at most one in magnitude, and $\operatorname{tr}(DZ) = \sum_i d_i Z_{ii} \le \sum_i d_i$, with equality for $Z = I$, i.e. $R = UV^\mathsf{T}$. If $\det(UV^\mathsf{T}) = -1$ this is a reflection, not a rotation; the best rotation then flips the axis with the smallest singular value, $Z = \operatorname{diag}(1, 1, -1)$, which gives the stated formula. ∎

If the scale is also free (a similarity transform, needed for monocular vision without an IMU), the optimal scale is $s^\star = \operatorname{tr}(D \operatorname{diag}(1, 1, \det(UV^\mathsf{T}))) \big/ \frac{1}{N} \sum_i \|b_i\|^2$, applied as $s^\star R^\star \hat{p}_i + t^\star$ with $t^\star = \mu - s^\star R^\star \hat{\mu}$.

**Key idea: align only what is unobservable**

Which transformation to allow depends on the estimator. Monocular vision alone has a free scale, so it uses a similarity transform (7 DOF). VIO has metric scale and observable roll and pitch: its unobservable directions are exactly translation and yaw. The appropriate alignment is therefore 4-DOF (translation plus a rotation about gravity) [56]. A full 6-DOF alignment would also remove roll and pitch errors that the estimator was responsible for.

The 4-DOF alignment follows the same proof with $R$ restricted to rotations $R_z(\psi)$ about the vertical. For centered points $a = (x, y, z)$ (truth) and $b = (\hat{x}, \hat{y}, \hat{z})$ (estimate), $a^\mathsf{T} R_z(\psi) b =$

$(x\hat{x} + y\hat{y})\cos\psi + (y\hat{x} - x\hat{y})\sin\psi + z\hat{z}$, whose sum over the points is maximized by

$$\psi^\star = \operatorname{atan2}\Big(\sum_i (y_i\hat{x}_i - x_i\hat{y}_i),\ \sum_i (x_i\hat{x}_i + y_i\hat{y}_i)\Big), \tag{19.5}$$

again with $t^\star = \mu - R_z(\psi^\star)\hat{\mu}$.

Milestone 10b reports ATE after SE(3) alignment, as in most published benchmarks; reporting the 4-DOF result alongside it is more faithful to what VIO can know.

### 19.5.2 Relative pose error

ATE is dominated by the largest drift and depends on trajectory length and shape. The relative pose error (RPE) compares relative motions over a fixed distance or time $\Delta$:

$$E_i = \left(T_i^{-1}T_{i+\Delta}\right)^{-1}\left(\hat{T}_i^{-1}\hat{T}_{i+\Delta}\right), \tag{19.6}$$

and reports statistics of the translation and rotation parts of $E_i$, often as a percentage of distance traveled. It needs no global alignment and measures local drift, which is what odometry is about. The `evo` package [21] computes both metrics with all the alignment variants.

**Project link: Milestone 7**

M7 logs $\hat{x}$, $\operatorname{diag}(P)$, ground truth, NIS and NEES to a preallocated buffer, flushes it outside the hot loop, and plots $3\sigma$ envelopes and NEES/NIS against their $\chi^2$ bounds from a single script. Exit criteria: average NEES inside the 95% interval for 15 DOF over most of a $\geq 50$-run synthetic Monte Carlo; NIS within its per-update bound for about 95% of updates; at least 95% $3\sigma$ coverage of velocity and biases on MH_01; zero allocations while logging.

**Key takeaways**

- A filter must be judged on the honesty of its covariance as well as its accuracy.
- NEES needs ground truth and tests $P$; NIS needs none and tests $S$. Both are $\chi^2$ under consistency.
- Monte Carlo averages have exact bounds $[\chi^2_{0.025}(Nn), \chi^2_{0.975}(Nn)]/N$.
- Overconfidence (NEES too high) is the dangerous failure; NIS alone detects underconfidence poorly.
- Tune physically meaningful parameters for consistency, on synthetic data first.
- Report ATE after an alignment matched to the unobservable directions, and RPE for local drift.

## Exercises

**19.1** Show that the single-run NEES of a consistent 15-state filter exceeds its 95% quantile 5% of the time. Why is the Monte Carlo average a much sharper test?

**19.2** Reproduce Figure 19.1. Then make only the measurement noise wrong instead of the process noise and compare the signatures.

**19.3** Derive the closed-form 4-DOF alignment above by maximizing $\sum_i p_i^\top R_z(\psi)\hat{p}_i$ over $\psi$.

**19.4** Explain why the NEES of yaw in a VIO run on real data tends to grow over time even when the NIS looks healthy. (Revisit after Chapter 29.)

**19.5** Compute the RPE over 10 m segments for a trajectory with a constant yaw drift of $1^\circ$ per minute flying at 1 m/s. How does it compare with the ATE after a 10-minute flight?

## Solutions to the exercises

**19.1** If the filter is consistent and its errors Gaussian, $\epsilon_k = e_k^\mathsf{T} P_k^{-1} e_k \sim \chi^2_{15}$ (Theorem 5.17). The 95% quantile $\chi^2_{0.95}(15) = 25.0$ is by definition the value exceeded with probability 5%, so a single run exceeds it at 5% of its time steps. A single sample is a weak test: its two-sided 95% range is $[6.3, 27.5]$, a factor of more than four, and a filter whose covariance is too small by 30% still produces values inside it most of the time. Averaging over $N$ independent runs shrinks the spread: $N\bar{\epsilon} \sim \chi^2_{15N}$ has relative standard deviation $\sqrt{2/(15N)}$, and for $N = 50$ the interval is $[13.5, 16.6]$, about ±10%. A 30% error now moves the average far outside it.

**19.2** In a simulation of the same kind as Figure 19.1 ($q = r = 1$, 50 runs of 200 steps), the average NEES ($n = 2$) and NIS ($m = 1$) after the transient are:

| filter | NEES (band $[1.48, 2.59]$) | NIS (band $[0.65, 1.43]$) |
|---|---|---|
| consistent | 1.9 | 1.00 |
| $Q/20$ | 20.0 | 1.5 |
| $20\,Q$ | 1.1 | 0.87 |
| $R/20$ | 21.7 | 17.5 |
| $20\,R$ | 1.0 | 0.08 |

Both kinds of error make the filter over- or underconfident in the NEES, but the NIS separates them. A wrong measurement noise enters $S$ directly, so the NIS is wildly off (17.5 and 0.08). A wrong process noise affects $S$ only through $HP^-H^\mathsf{T}$, which the measurement noise partly masks, so the NIS moves much less (1.5 and 0.87, the latter inside the band). Rule of thumb: NIS problems point at $R$ (or at outliers and wrong measurement models), NEES problems with a healthy NIS point at $Q$ or at unobservable directions (Table 19.1).

**19.3** With centered points $a_i = (x_i, y_i, z_i)$ (truth) and $b_i = (\hat{x}_i, \hat{y}_i, \hat{z}_i)$ (estimate),

$$\sum_i a_i^\mathsf{T} R_z(\psi) b_i = \cos\psi \underbrace{\sum_i (x_i\hat{x}_i + y_i\hat{y}_i)}_{A} + \sin\psi \underbrace{\sum_i (y_i\hat{x}_i - x_i\hat{y}_i)}_{B} + \sum_i z_i\hat{z}_i.$$

As a function of $\psi$ this is $\sqrt{A^2 + B^2}\cos(\psi - \psi_0) + \text{const}$ with $(\cos\psi_0, \sin\psi_0) \propto (A, B)$, so it is maximized at $\psi^\star = \operatorname{atan2}(B, A)$, which is (19.5). (Setting the derivative $-A\sin\psi + B\cos\psi$ to zero gives $\tan\psi = B/A$, which has two solutions; the atan2 picks the maximum rather than the minimum.) The translation follows as before: $t^\star = \mu - R_z(\psi^\star)\hat{\mu}$, which maps centroid onto centroid.

**19.4** The standard EKF linearizes at estimates that change over time, which makes the global yaw appear observable in its linearized model (Chapter 29). The filter then extracts spurious yaw information from measurements that contain none: its yaw variance shrinks, or grows more slowly than the true yaw error, which in VIO drifts like a random walk because nothing measures it. The NEES of yaw, $e_\psi^2/\sigma_\psi^2$, therefore grows steadily. The NIS stays healthy because innovations depend only on observable quantities (relative motion, roll, pitch, scale): an error along an unobservable direction

changes no predicted measurement, so it cannot show up in the residuals (Table 19.1, "high, growing / normal").

**19.5** A yaw drift of 1° per minute is $\omega_d = 2.9\times10^{-4}$ rad/s. A 10 m segment takes 10 s at 1 m/s, during which the heading drifts by 0.167°: that is the rotational RPE. The translational RPE is the lateral offset accumulated within the segment, about $\frac{1}{2}\omega_d v\,\Delta t^2 = 1.5$ cm (a simulation gives 1.4 cm), i.e. 0.15% of the distance travelled, and it is the same for every segment of the flight. For a straight 10-minute flight, by contrast, the estimated path bends into an arc of radius $v/\omega_d = 3.4$ km: the final position error is $\frac{1}{2}\omega_d v T^2 = 52$ m, the RMS error without alignment 23 m, and after the best rigid alignment still 3.9 m. The ATE grows quadratically with the duration and depends on the trajectory and on the alignment; the RPE does not grow and measures the drift rate itself, which is why odometry is compared with RPE and full trajectories with ATE.

Part V

# Computer Vision

Chapter 20

# Image Formation and Camera Models

**In this chapter**

- Understand how a camera forms an image: pinholes, lenses, focus, sensors, exposure and shutters.
- Derive the pinhole projection, the intrinsic matrix and normalized image coordinates.
- Use homogeneous coordinates and the basic projective geometry of points, lines and homographies.
- Model and invert the radial-tangential lens distortion used by EuRoC, and know the fisheye alternative.
- Understand how cameras are calibrated.
- State the project's camera measurement model with its noise, derive the projection Jacobian, and understand extrinsics and time offsets.

## 20.1 How a camera forms an image

### 20.1.1 From pinhole to lens

A camera measures the *directions* of light rays. In a *camera obscura*, light from the scene enters a dark box through a tiny hole and forms an inverted image on the opposite wall: every point of the wall receives light only from the scene point on the straight line through the hole. This is the *pinhole model*, and it is geometrically perfect. It is also impractical: a hole small enough to give a sharp image lets in very little light.

A lens gathers light through a large aperture and bends it so that all rays from one scene point converge again at one image point. For an ideal *thin lens* of focal length $f_L$, a point at distance $z_o$ in front of the lens is imaged sharply at distance $z_i$ behind it, where

$$\frac{1}{f_L} = \frac{1}{z_o} + \frac{1}{z_i}. \tag{20.1}$$

For distant scenes ($z_o \gg f_L$) the image forms at $z_i \approx f_L$, which is where the sensor sits in a camera focused at infinity. Points at other distances form slightly blurred spots; the range of distances that stays acceptably sharp is the *depth of field*, larger for small apertures and short focal lengths. The central ray through the lens center is not bent, so the geometry of a focused lens camera is exactly that of a pinhole at the lens center: the pinhole model describes it, and lens imperfections are added as *distortion* (Section 20.4).

### 20.1.2 The image sensor

The sensor is a grid of light-sensitive *pixels*. Each accumulates charge in proportion to the light it receives during the *exposure time*, and the charge is converted into a number, typically 8 bits per pixel for the monochrome cameras of EuRoC. Several properties of the sensor matter to an estimator.

- *Exposure and motion blur.* A camera rotating at $\omega$ rad/s during an exposure of $T$ seconds smears each point over about $f\omega T$ pixels, with $f$ the focal length in pixels. At 1 rad/s, 5 ms and $f = 458$ px this is 2.3 px, enough to degrade feature tracking. EuRoC's difficult sequences contain exactly such blur.
- *Global versus rolling shutter.* A global shutter exposes all pixels at the same instant, as EuRoC's cameras do. A rolling shutter (common in phones) exposes rows one after another, so each row is captured at a different time and, on a moving camera, from a different pose. Rolling-shutter images need an extended measurement model.
- *Noise and dynamic range.* Pixel values carry photon and electronic noise, and scenes brighter or darker than the sensor's range saturate. Auto exposure changes the brightness of the same scene point between frames, which matters for intensity-based tracking (Chapter 22).

**Pixel coordinates.** We write pixel coordinates as $(u, v)$, with $u$ increasing to the right and $v$ increasing downward, and the origin at the top-left of the image. In OpenCV's convention, integer coordinates are pixel *centers*. The camera frame $C$ is aligned with this: $x_c$ to the right, $y_c$ down, $z_c$ along the optical axis into the scene.

## 20.2 The pinhole projection

An ideal pinhole camera lets light through a single point, the optical center. A scene point with camera-frame coordinates $p_c = (X, Y, Z)$, with $Z$ along the optical axis, projects through the center onto an image plane. Placing a virtual image plane at unit distance *in front of* the center (which avoids the inversion of the physical image) and using similar triangles, the image of the point is

$$\pi(p_c) = \begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} X/Z \\ Y/Z \end{bmatrix}. \tag{20.2}$$

These are the *normalized image coordinates*: dimensionless, independent of the lens, and equal to the tangents of the ray's angles from the optical axis. The vector $\bar{x} = (x, y, 1)$ is the *bearing* of the point, defined up to scale.

### 20.2.1 Intrinsic parameters

Pixels are obtained by scaling and shifting the normalized coordinates with the *intrinsic matrix*:

$$\begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = K \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}, \qquad K = \begin{bmatrix} f_u & s & c_u \\ 0 & f_v & c_v \\ 0 & 0 & 1 \end{bmatrix}, \tag{20.3}$$

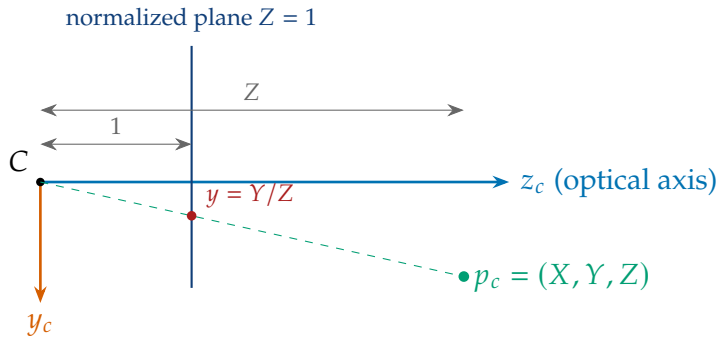



**Figure 20.1:** Pinhole projection in the $y$-$z$ plane. The ray from the optical center $C$ to the point intersects the plane $Z = 1$ at height $Y/Z$. All points along the ray project to the same image point, so depth is lost.

with focal lengths $f_u, f_v$ in pixels, principal point $(c_u, c_v)$ (where the optical axis pierces the image), and skew $s$ (zero for modern sensors). The focal length in pixels is the physical focal length divided by the pixel pitch; $f_u \neq f_v$ if pixels are not square. Inverting $K$ turns a pixel into a bearing, $\bar{x} = K^{-1}(u, v, 1)^\mathsf{T}$. The horizontal *field of view* of a $W$-pixel-wide image is $2 \arctan\left(W/(2f_u)\right)$, ignoring distortion. EuRoC's `cam0` has $f_u = 458.654$, $f_v = 457.296$, $c_u = 367.215$, $c_v = 248.375$ on a $752 \times 480$ sensor: a horizontal field of view of about 79°.

## 20.3 Homogeneous coordinates and projective geometry

### 20.3.1 Points and lines in the image

The image point $(x, y)$ corresponds to the whole ray of 3D vectors $\lambda(x, y, 1)$, $\lambda \neq 0$. *Homogeneous coordinates* make this explicit: a point of the plane is represented by any non-zero 3-vector $\tilde{x} = (x_1, x_2, x_3)$, with $\tilde{x}$ and $\lambda\tilde{x}$ representing the same point, and the ordinary coordinates are recovered as $(x_1/x_3, x_2/x_3)$. Vectors with $x_3 = 0$ represent *points at infinity*: directions, where parallel lines meet.

A line $ax + by + c = 0$ is represented by the 3-vector $l = (a, b, c)$, also up to scale, and a point lies on it exactly when

$$l^\mathsf{T}\tilde{x} = 0. \tag{20.4}$$

This symmetric relation makes two constructions one-liners:

- the line through two points is $l = \tilde{x}_1 \times \tilde{x}_2$ (it is orthogonal to both, so both lie on it);
- the intersection of two lines is $\tilde{x} = l_1 \times l_2$ (by the same argument).

Two parallel lines $(a, b, c_1)$ and $(a, b, c_2)$ intersect at $(b, -a, 0)$ times a constant: a point at infinity in their common direction. In an image of a 3D scene, parallel 3D lines are generally not parallel in the image and meet at a finite *vanishing point*, the image of their common direction.

### 20.3.2 Homographies

**Definition 20.1** (Homography)**.** A *homography* (projective transformation) of the plane is a map $\tilde{x} \mapsto H\tilde{x}$ for an invertible $3 \times 3$ matrix $H$, defined up to scale (eight degrees of freedom).

Homographies map lines to lines (if $l^{\mathsf{T}}\tilde{x} = 0$ then $(H^{-\mathsf{T}}l)^{\mathsf{T}}(H\tilde{x}) = 0$) but do not preserve parallelism, lengths or angles. Two situations in which they arise are central to vision:

- the images of a *plane* in two views are related by a homography (Chapter 23), which is the basis of camera calibration below;
- two images taken by a camera that only *rotates* are related by the homography $KRK^{-1}$, independently of the scene (Chapters 22 and 23).

### 20.3.3 The projection matrix

In homogeneous coordinates the complete projection of a world point $p_w$ (with homogeneous coordinates $\tilde{p}_w = (p_w, 1)$) into pixels is a single linear map,

$$\lambda \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = K \begin{bmatrix} R_{cw} & p_{cw} \end{bmatrix} \tilde{p}_w = P\,\tilde{p}_w, \qquad P = K\,[R_{cw} \;\; p_{cw}] \in \mathbb{R}^{3\times 4}, \tag{20.5}$$

where $(R_{cw}, p_{cw})$ maps world coordinates into the camera frame and $\lambda = Z$ is the depth. The *camera matrix* $P$ has eleven degrees of freedom (twelve entries up to scale): five intrinsic and six extrinsic. Linear methods that estimate $P$, $H$ or the essential matrix from correspondences (Chapter 23) all exploit the fact that projection is linear in homogeneous coordinates.

## 20.4 Lens distortion

Real lenses bend rays, most strongly near the image edges, so the image of a straight line is curved. The *radial-tangential* (Brown–Conrady) model used by EuRoC maps ideal normalized coordinates $(x, y)$ to distorted ones $(x_d, y_d)$:

$$x_d = x\,(1 + k_1 r^2 + k_2 r^4) + 2p_1 xy + p_2(r^2 + 2x^2), \tag{20.6}$$

$$y_d = y\,(1 + k_1 r^2 + k_2 r^4) + p_1(r^2 + 2y^2) + 2p_2 xy, \qquad r^2 = x^2 + y^2, \tag{20.7}$$

after which $K$ is applied to $(x_d, y_d)$. The *radial* terms $(k_1, k_2)$ model the dominant symmetric distortion of a lens; the *tangential* terms $(p_1, p_2)$ model a lens slightly tilted or decentered relative to the sensor. For `cam0`, $(k_1, k_2, p_1, p_2) = (-0.2834, 0.07396, 1.94 \times 10^{-4}, 1.76 \times 10^{-5})$. The negative $k_1$ produces *barrel* distortion (Figure 20.2). At the middle of the left and right image edges the radial factor $1 + k_1 r^2 + k_2 r^4$ is 0.79 and 0.77, which moves points by 100 and 115 pixels; at the corners it is 0.73, a shift of about 165 pixels. Ignoring distortion is therefore not an option.

**Undistortion.** The front end measures distorted pixels and needs ideal normalized coordinates. The model has no closed-form inverse, but a fixed-point iteration converges quickly

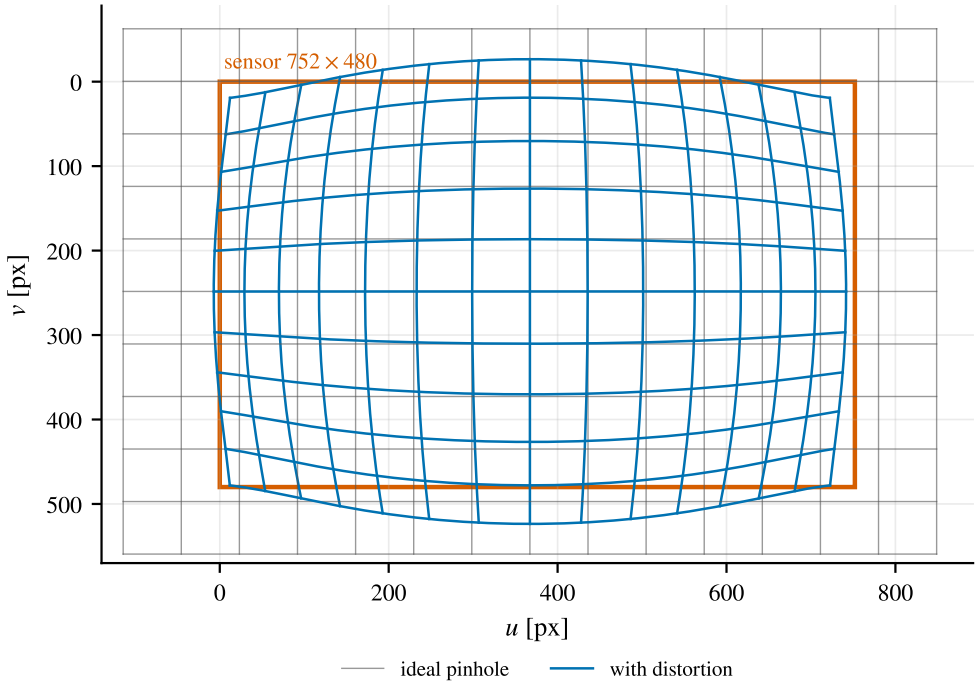



**Figure 20.2:** EuRoC `cam0` lens distortion. A regular grid in normalized coordinates (gray) is imaged by the real lens as the curved blue grid. Distortion pulls points toward the center, increasingly toward the edges, so the sensor (orange) sees a wider field than an ideal pinhole with the same focal length would.

for moderate distortion: starting from $x^{(0)} = x_d$,

$$x^{(j+1)} = \frac{x_d - \Delta_x(x^{(j)}, y^{(j)})}{1 + k_1 r_j^2 + k_2 r_j^4}, \qquad y^{(j+1)} = \frac{y_d - \Delta_y(x^{(j)}, y^{(j)})}{1 + k_1 r_j^2 + k_2 r_j^4}, \tag{20.8}$$

where $\Delta$ denotes the tangential terms. A Gauss–Newton iteration (Chapter 10) with the $2 \times 2$ Jacobian of the distortion converges faster and more reliably near the edges. OpenCV's `cv::undistortPoints` implements the iterative scheme. Milestone 8 checks undistortion by distorting and undistorting a grid of points.

**Key idea: undistort points, not images**

The estimator needs a few hundred feature locations, not a rectified image. Undistorting only the tracked points costs microseconds; remapping a full image costs milliseconds, resamples the pixels (blurring them), and changes the noise of the feature detector in a position-dependent way. Track in the raw image and undistort the tracks.

**Wide-angle lenses.** Beyond about 120° of field of view, the pinhole model itself breaks down (a ray at 90° from the axis would have infinite normalized coordinates). *Fisheye* models parameterize the image radius as a function of the angle $\vartheta$ of the incoming ray, for example the equidistant (Kannala–Brandt) model $r_d = \vartheta(1 + k_1\vartheta^2 + k_2\vartheta^4 + \cdots)$. The rest of the pipeline is unchanged: everything downstream of undistortion works with bearings, which can be represented as unit vectors when they are far from the optical axis.

## 20.5 Camera calibration

How were EuRoC's intrinsics and distortion coefficients obtained? By observing a known calibration target (a checkerboard or grid of markers) in many images and fitting the camera model to the observed corner positions.

**Zhang's method.** Place the target in the plane $Z = 0$ of its own frame. A target point $(X, Y, 0)$ then projects as $\lambda\tilde{u} = K[r_1\ r_2\ r_3\ t](X, Y, 0, 1)^\mathsf{T} = K[r_1\ r_2\ t](X, Y, 1)^\mathsf{T}$: each image of the target is a homography $H = [h_1\ h_2\ h_3] \propto K[r_1\ r_2\ t]$, estimable from four or more corner correspondences (Chapter 23). Because $r_1$ and $r_2$ are orthonormal, $r_1 = \lambda K^{-1}h_1$ and $r_2 = \lambda K^{-1}h_2$ give two constraints on the matrix $\omega = K^{-\mathsf{T}}K^{-1}$:

$$h_1^\mathsf{T}\omega h_2 = 0, \qquad h_1^\mathsf{T}\omega h_1 = h_2^\mathsf{T}\omega h_2. \tag{20.9}$$

These are linear in the entries of the symmetric $\omega$, so three or more images determine it; $K$ follows from a Cholesky factorization of $\omega$. The linear estimate is then refined, together with the distortion coefficients and each image's pose, by Levenberg–Marquardt (Chapter 10) minimizing the *reprojection error*, the distance between observed and predicted corners. The residual reprojection error after calibration, typically a few tenths of a pixel, is the standard measure of calibration quality.

**Camera–IMU calibration.** The extrinsics $T_{bc}$ and the time offset are calibrated jointly with the IMU, by moving the rig in front of the target (Chapter 15).

## 20.6 The measurement model

**Frozen convention: camera model, AGENTS.md C6**

In normalized, undistorted image coordinates,

$$p_c = R_{bc}^\mathsf{T}\left(R_{wb}^\mathsf{T}(p_f - p_{wb}) - p_{bc}\right), \qquad z = \begin{bmatrix} p_{c,x}/p_{c,z} \\ p_{c,y}/p_{c,z} \end{bmatrix} + n_{uv}, \qquad \sigma_{uv} \approx \sigma_{px}/f. \tag{20.10}$$

The first equation chains the world-to-body and body-to-camera transformations of (7.20). The noise model follows from $u = f_u x + c_u$: a pixel error $\delta u$ corresponds to a normalized error $\delta u / f_u$. With $\sigma_{px} = 1$ px and $f \approx 458$ px, $\sigma_{uv} \approx 2.2 \times 10^{-3}$. Strictly, distortion makes the mapping from pixel noise to normalized noise position-dependent, by the inverse of the distortion Jacobian, and $f_u \neq f_v$. Both effects are small for EuRoC and conventionally ignored, but they are a legitimate refinement.

## 20.7 The projection Jacobian

**Proposition 20.2** (Jacobian of the pinhole projection)**.**

$$\frac{\partial \pi}{\partial p_c} = \frac{1}{Z}\begin{bmatrix} 1 & 0 & -X/Z \\ 0 & 1 & -Y/Z \end{bmatrix} = \frac{1}{Z}\begin{bmatrix} I_2 & -\pi(p_c) \end{bmatrix}. \tag{20.11}$$

*Proof.* Differentiate $X/Z$ and $Y/Z$ with the quotient rule: $\partial(X/Z)/\partial X = 1/Z$, $\partial(X/Z)/\partial Z = -X/Z^2$, and similarly for $Y/Z$. ∎

The Jacobian has rank two, and its nullspace is spanned by $p_c$ itself: moving the point along its viewing ray does not change its image. This is the single-view loss of depth in differential form, and it is why a feature must be observed from at least two sufficiently different viewpoints before it constrains anything (Chapter 23). The factor $1/Z$ says that distant points have small image motion for a given change in position. They constrain rotation well and translation poorly.

The full measurement Jacobian with respect to the filter state is the chain-rule product of this matrix with the Jacobian of $p_c$ with respect to the clone pose and the feature position. Deriving those is part of Chapter 26.

**Pitfall: points behind the camera**

(20.2) happily projects points with $Z < 0$, flipping their image through the center. A triangulation or linearization that produces a negative depth must be rejected (the *cheirality* check), not projected. Points with very small positive $Z$ produce huge Jacobians and should be rejected too.

## 20.8 Extrinsics and time offset

**Extrinsic calibration.** The transformation $T_{bc}$ between the IMU and the camera is estimated offline, for EuRoC with Kalibr [17], and stored as `T_BS` in `cam0/sensor.yaml`. Its rotation is close to a permutation of axes, and its translation is a few centimeters (Appendix D). An error of $\delta\phi$ in the extrinsic rotation biases every predicted bearing by about $\delta\phi$, which looks to the filter like a systematic residual. A translation error matters mostly for near points. The project treats $T_{bc}$ as exact (AGENTS.md C3). Estimating it online is a stretch goal.

**Time offset.** If the camera timestamp differs from the IMU clock by $t_d$, a feature moving across the image at velocity $\dot{z}$ is measured with an error of about $\dot{z}\, t_d$. A 1 ms offset at an image-plane velocity of 0.5 normalized units per second (fast rotation) is an error of $5 \times 10^{-4}$, a quarter of a pixel. EuRoC is hardware synchronized, so $t_d \approx 0$; consumer devices can have offsets of tens of milliseconds and must estimate it online [35].

**Key takeaways**

- A focused lens camera has the geometry of a pinhole at the lens center; lens imperfections are modeled as distortion.

- Exposure time causes motion blur of about $f\omega T$ pixels; EuRoC's global shutter exposes all pixels at once.
- Normalized coordinates $(X/Z, Y/Z)$ are lens-independent bearings; $K$ maps them to pixels.
- Homogeneous coordinates make projection linear; lines through points and intersections of lines are cross products; homographies map planes and pure rotations between views.
- EuRoC's lens has strong barrel distortion; undistort the tracked points, not the images.
- Cameras are calibrated by fitting the model to images of a known target, minimizing reprojection error.
- $\partial\pi/\partial p_c = \frac{1}{Z}[I_2 \;\; -\pi(p_c)]$; its nullspace is the viewing ray.

## Exercises

**20.1** A lens with $f_L = 4$ mm is focused at infinity. How far must the sensor move to focus on an object at 0.5 m?

**20.2** Compute the horizontal and vertical fields of view of `cam0` with and without distortion.

**20.3** Compute the intersection of the lines $x + y = 1$ and $x - y = 0$ with homogeneous coordinates, and the line through $(1, 2)$ and $(3, 1)$.

**20.4** Show that two parallel lines intersect at a point at infinity, and find the vanishing point of the image of a family of parallel 3D lines with direction $d$ under the camera $P = K[I \;\; 0]$.

**20.5** Implement distortion and fixed-point undistortion for the EuRoC model. How many iterations are needed for $10^{-6}$ accuracy at the image corners? Compare with Gauss–Newton.

**20.6** Derive the two linear constraints of Zhang's method from the orthonormality of $r_1$ and $r_2$.

**20.7** A point at depth 10 m is observed by a camera translating sideways at 1 m/s and rotating at 1 rad/s. Which motion dominates its image velocity? What does this imply for the observability of translation from distant points?

## Solutions to the exercises

**20.1** From $1/z_i = 1/f_L - 1/z_o$, $z_i = f_L z_o/(z_o - f_L) = 4 \cdot 500/496$ mm = 4.0323 mm: the sensor must move 32 µm away from the lens. To first order the shift is $f_L^2/z_o$, so it shrinks with the square of the focal length. If the sensor is left at $f_L$, the light from the point converges 32 µm behind it, and an aperture of diameter $D$ produces a blur spot of diameter $D(z_i - f_L)/z_i$ on the sensor. For an f/2 lens ($D$ = 2 mm) this is 16 µm, under three pixels of 6 µm. Short focal lengths give a large depth of field, which is why small fixed-focus cameras stay nearly sharp over a wide range of distances.

**20.2** The principal point is not at the image center, so add the angles from the optical axis to the two opposite edges, measured along the row and the column through $(c_u, c_v)$. Without distortion the left and right edges are at normalized $x = -367.7/458.65$ and $384.3/458.65$, at 38.7° and 40.0° from the axis; the top and bottom edges are at 28.6° and 26.8°. With distortion, the edge pixels must first be undistorted (Exercise 5): the middle of the left edge, distorted coordinate $x_d = -0.80$, is the image of a ray with $x = -1.02$, at 45.6°. Altogether:

| | horizontal | vertical | diagonal |
|---|---|---|---|
| pinhole only, $2\arctan(W/2f_u)$ | 78.7° | 55.4° | 88.4° |
| with distortion | 93.1° | 59.7° | 106.2° |

Barrel distortion compresses the periphery onto the sensor, so the camera sees 14° more horizontally than its focal length suggests; the image corners look along rays 53° off the axis, not 44°.

**20.3** The lines are $l_1 = (1, 1, -1)$ and $l_2 = (1, -1, 0)$, and $l_1 \times l_2 = (-1, -1, -2) \sim (\frac{1}{2}, \frac{1}{2}, 1)$: the intersection is $(\frac{1}{2}, \frac{1}{2})$, which satisfies both equations. The line through the points is $(1, 2, 1) \times (3, 1, 1) = (1, 2, -5)$, i.e. $x + 2y = 5$; both points satisfy it.

**20.4** For parallel lines $(a, b, c_1)$ and $(a, b, c_2)$, $c_1 \neq c_2$,

$$(a, b, c_1) \times (a, b, c_2) = \big(b(c_2 - c_1),\ a(c_1 - c_2),\ 0\big) = (c_2 - c_1)\,(b, -a, 0),$$

a point with third coordinate zero, i.e. at infinity, in the direction $(b, -a)$ of the lines themselves (their normal is $(a, b)$). For the 3D lines $X(\lambda) = X_0 + \lambda d$, the camera $P = K[I \ \ 0]$ gives the image $K(X_0 + \lambda d) \sim K(X_0/\lambda + d)$, which tends to

$$\tilde{v} = Kd \qquad (\lambda \to \infty),$$

independently of $X_0$: all lines of the family pass through this vanishing point, at pixel $(f_u d_x/d_z + c_u,\ f_v d_y/d_z + c_v)$ for zero skew. If $d_z = 0$ (lines parallel to the image plane), $Kd$ has third coordinate zero and the image lines stay parallel. The vanishing points of all directions in a plane with normal $n$ lie on the line $K^{-\mathsf{T}}n$, the plane's horizon, since $(K^{-\mathsf{T}}n)^{\mathsf{T}}Kd = n^{\mathsf{T}}d = 0$.

**20.5** Distortion and the fixed-point iteration are the formulas of Section 20.4. For Gauss–Newton, solve $f(x) = x_d$ with the $2\times2$ Jacobian $J_f$ of the distortion: $x \leftarrow x - J_f^{-1}\big(f(x) - x_d\big)$ (with as many equations as unknowns, this is Newton's method). Measuring the

error against a fully converged solution, in normalized units ($10^{-6}$ is $5 \times 10^{-4}$ px):

| pixel | contraction factor | fixed point | Gauss–Newton |
|---|---|---|---|
| the four image corners | 0.03–0.17 | 5–8 iterations | 2–3 iterations |
| middle of left edge, $(0, c_v)$ | 0.34 | 12 iterations | 3 iterations |

The fixed-point error falls by a constant factor per iteration. For radial distortion this factor is $|2k_1r^2 + 4k_2r^4|/(1 + k_1r^2 + k_2r^4)$, which peaks at 0.34 for $r \approx 1$: the hardest point is the middle of the left and right edges, not the corners, where the $k_2$ term flattens the distortion curve. Gauss–Newton converges quadratically (errors $10^{-2}, 10^{-4}, 10^{-8}$ at a corner), and each iteration costs only a few more operations. A practical warning: OpenCV's `cv::undistortPoints` stops after five iterations unless it is given termination criteria, which leaves an error of about $1.1 \times 10^{-3}$, half a pixel, at the middle of the left edge. Milestone 8's round-trip test catches this.

**20.6** The homography is $H = [h_1\ h_2\ h_3] = \lambda K[r_1\ r_2\ t]$ for an unknown scale $\lambda$, so $r_1 = \lambda^{-1}K^{-1}h_1$ and $r_2 = \lambda^{-1}K^{-1}h_2$. The columns of a rotation are orthonormal:

$$r_1^\mathsf{T} r_2 = 0 \;\Rightarrow\; h_1^\mathsf{T} K^{-\mathsf{T}} K^{-1} h_2 = h_1^\mathsf{T} \omega h_2 = 0, \qquad r_1^\mathsf{T} r_1 = r_2^\mathsf{T} r_2 \;\Rightarrow\; h_1^\mathsf{T} \omega h_1 = h_2^\mathsf{T} \omega h_2.$$

The unknown $\lambda$ cancels in both; the unit-norm condition itself cannot be used, because it would involve $\lambda$. Each equation is linear in the six distinct entries $b = (\omega_{11}, \omega_{12}, \omega_{22}, \omega_{13}, \omega_{23}, \omega_{33})$: $h_i^\mathsf{T} \omega h_j = v_{ij}^\mathsf{T} b$ with

$$v_{ij} = \big(h_{i1}h_{j1},\ h_{i1}h_{j2} + h_{i2}h_{j1},\ h_{i2}h_{j2},\ h_{i3}h_{j1} + h_{i1}h_{j3},\ h_{i3}h_{j2} + h_{i2}h_{j3},\ h_{i3}h_{j3}\big).$$

Each image contributes the rows $v_{12}^\mathsf{T}$ and $(v_{11} - v_{22})^\mathsf{T}$, and $b$ is the null vector of the stacked matrix (the smallest right singular vector), determined up to scale. Since $\omega$ has five degrees of freedom up to scale, three images in general position suffice. Then $\omega = K^{-\mathsf{T}}K^{-1} = LL^\mathsf{T}$ with $L = K^{-\mathsf{T}}$ lower triangular, so the Cholesky factor of $\omega$ (sign and scale fixed so that $\omega > 0$) gives $K = L^{-\mathsf{T}}$, normalized to $K_{33} = 1$.

**20.7** Translation at speed $v$ perpendicular to the ray moves the image at $v/Z = 0.1$ rad/s, about 46 px/s. Rotation at $\omega$ about the camera's $y$-axis moves a point at image position $x$ at $\omega(1 + x^2) \geq \omega = 1$ rad/s, 460 px/s, independent of depth. Rotation dominates by a factor of ten. The translational signal of a point scales as $1/Z$, so distant points constrain translation weakly and points at infinity not at all, while they constrain rotation as well as near points do. Worse, a rotation error of $\delta\omega$ produces the same image motion as a velocity error of $Z\,\delta\omega$: a gyroscope-rate error of 0.01 rad/s mimics 0.1 m/s at 10 m. Estimating translation from distant points therefore requires the rotation to be known very accurately, which is exactly what the gyroscope provides in VIO.

Chapter 21

# Digital Image Processing

**In this chapter**

- Treat an image as a sampled function, and filter it by convolution.
- Smooth images with Gaussian kernels, and understand separability and cost.
- Compute image gradients robustly with derivative-of-smoothing kernels such as Sobel and Scharr.
- Understand why images must be blurred before they are down-sampled, and build Gaussian pyramids.
- Interpolate images at sub-pixel positions, find local maxima, and refine them to sub-pixel accuracy.
- Know how photometric changes affect intensity-based methods.

Feature detection and tracking (Chapter 22) operate on raw pixel arrays: they smooth them, differentiate them, shrink them and sample them between pixels. This chapter develops these operations from first principles, as far as the front end needs them.

## 21.1 Images as functions

A grayscale image is a function $I(u, v)$ giving the brightness at image position $(u, v)$, sampled on the integer grid of pixel centers and quantized, typically to integers between 0 and 255. In memory it is a 2D array indexed by row and column, $I[\text{row}, \text{col}] = I(u = \text{col}, v = \text{row})$; mixing up the two orders is a classic bug. Color images have three such channels; a monochrome image can be formed as a weighted sum of them. EuRoC's cameras are monochrome.

Between pixels, $I$ is undefined until we decide how to interpolate it (Section 21.5). Its derivatives must be approximated by differences of nearby pixels (Section 21.3). Both operations are sensitive to noise and to aliasing, which is what the rest of this chapter is about.

## 21.2 Linear filtering

### 21.2.1 Correlation and convolution

*Linear filtering* replaces each pixel by a weighted sum of its neighbors, with the weights given by a small array $h$, the *kernel*. Two closely related forms exist:

$$\begin{aligned} \text{correlation:} \quad (h \star I)[u,v] &= \sum_{i,j} h[i,j]\, I[u+i, v+j], \\ \text{convolution:} \quad (h * I)[u,v] &= \sum_{i,j} h[i,j]\, I[u-i, v-j]. \end{aligned} \tag{21.1}$$

Convolution flips the kernel; for symmetric kernels the two coincide. Both are *linear* and *shift-invariant*: filtering a shifted image gives the shifted filtered image. Convolution is also commutative and associative, so a cascade of filters equals a single filter, $h_2 * (h_1 * I) = (h_2 * h_1) * I$. Near the image border the kernel extends past the edge, and the missing pixels must be invented: by zeros, by replicating the border, or by reflecting the image. Results within a kernel radius of the border are always less reliable, which is why detectors ignore a margin there.

A $k \times k$ kernel costs $k^2$ multiplications per pixel. A kernel that factors as an outer product of a column and a row, $h = h_v h_u^{\mathsf{T}}$, is *separable*: filtering with $h$ equals filtering the rows with $h_u$ and then the columns with $h_v$, at a cost of $2k$ per pixel.

### 21.2.2 Smoothing

Averaging neighbors reduces noise. The simplest kernel, the *box filter*, averages a $k \times k$ square. The *Gaussian filter* weights neighbors by

$$G_\sigma(u,v) = \frac{1}{2\pi\sigma^2} \exp\!\Big(-\frac{u^2+v^2}{2\sigma^2}\Big) = g_\sigma(u)\, g_\sigma(v), \qquad g_\sigma(x) = \frac{1}{\sqrt{2\pi}\sigma} e^{-x^2/2\sigma^2}, \tag{21.2}$$

sampled at integer offsets, truncated at about $\pm 3\sigma$ and renormalized to sum to one. The factorization shows that it is separable. The Gaussian is preferred over the box because it has no sharp edges: its frequency response is itself a Gaussian, which removes high frequencies smoothly without the ripples of the box filter. Cascading two Gaussian filters gives a Gaussian whose variances add, $G_{\sigma_1} * G_{\sigma_2} = G_{\sqrt{\sigma_1^2+\sigma_2^2}}$. Small Gaussians are well approximated by binomial kernels, $\frac{1}{4}[1,2,1]$ and $\frac{1}{16}[1,4,6,4,1]$ in each direction.

## 21.3 Image derivatives

The *image gradient* $\nabla I = (I_u, I_v)$ points in the direction of fastest brightness increase, and its magnitude measures the local contrast. It is approximated by differences, for example the central difference $I_u[u,v] \approx \frac{1}{2}(I[u+1,v] - I[u-1,v])$, a correlation with $\frac{1}{2}[-1,0,1]$.

Differentiation amplifies noise: a derivative multiplies each frequency component by its frequency, so pixel-to-pixel noise, the highest frequency present, is amplified most. The remedy is to smooth before differentiating, and since both are convolutions, to combine them into one kernel. The *Sobel* operator smooths across the derivative direction with $[1,2,1]$ and

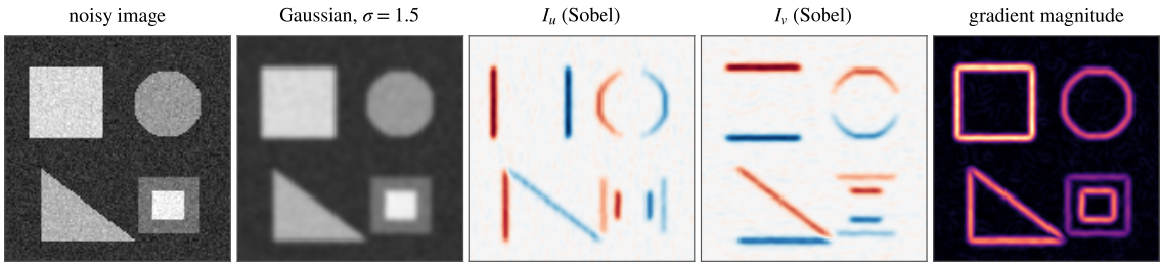



**Figure 21.1:** A synthetic noisy image, its Gaussian smoothing ($\sigma = 1.5$ px), its Sobel derivatives $I_u$ and $I_v$, and the gradient magnitude. Vertical edges respond in $I_u$, horizontal edges in $I_v$; corners respond in both, which is what corner detectors look for.

differentiates along it:

$$S_u = \begin{bmatrix} 1 \\ 2 \\ 1 \end{bmatrix} \begin{bmatrix} -1 & 0 & 1 \end{bmatrix} = \begin{bmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{bmatrix}, \qquad S_v = S_u^{\mathsf{T}}. \tag{21.3}$$

The *Scharr* operator uses $[3, 10, 3]$ instead of $[1, 2, 1]$, which gives gradient directions that are more accurate for all orientations; OpenCV's Lucas–Kanade tracker uses it. More generally, the *derivative of a Gaussian*, $\partial G_\sigma / \partial u$, smooths and differentiates at a chosen scale $\sigma$. Whatever the kernel, it is a weighted difference: its entries sum to zero, so it ignores uniform brightness, and its scale must be divided out when absolute gradient values matter (Sobel's sum of positive weights is 4 times the step, so $S_u \star I \approx 8 I_u$).

## 21.4 Sampling, aliasing and pyramids

### 21.4.1 Aliasing in images

An image is a sampled signal, and the sampling theorem (Chapter 6) applies in each direction: a pixel grid can represent spatial frequencies up to half a cycle per pixel. Shrinking an image by keeping every other pixel halves the representable frequency. Any finer detail does not vanish: it *aliases* into false coarse patterns (moiré). The cure is the same as for any sampled signal: low-pass filter, by blurring, before down-sampling.

### 21.4.2 Gaussian pyramids

A *Gaussian pyramid* is a sequence of images, each a blurred and half-resolution copy of the previous one:

$$I_{\ell+1} = \downarrow_2 \left( G * I_\ell \right), \tag{21.4}$$

where $G$ is a small Gaussian (OpenCV's `pyrDown` uses the binomial kernel $\frac{1}{16}[1, 4, 6, 4, 1]$ in each direction) and $\downarrow_2$ keeps every second row and column. Level $\ell$ has $2^{-\ell}$ of the original resolution in each direction, so a pixel position $u_0$ at level 0 corresponds to $u_\ell \approx u_0 / 2^\ell$ at level $\ell$ (up to half-pixel conventions). The whole pyramid costs only a third more memory than the original image ($1 + \frac{1}{4} + \frac{1}{16} + \cdots = \frac{4}{3}$).

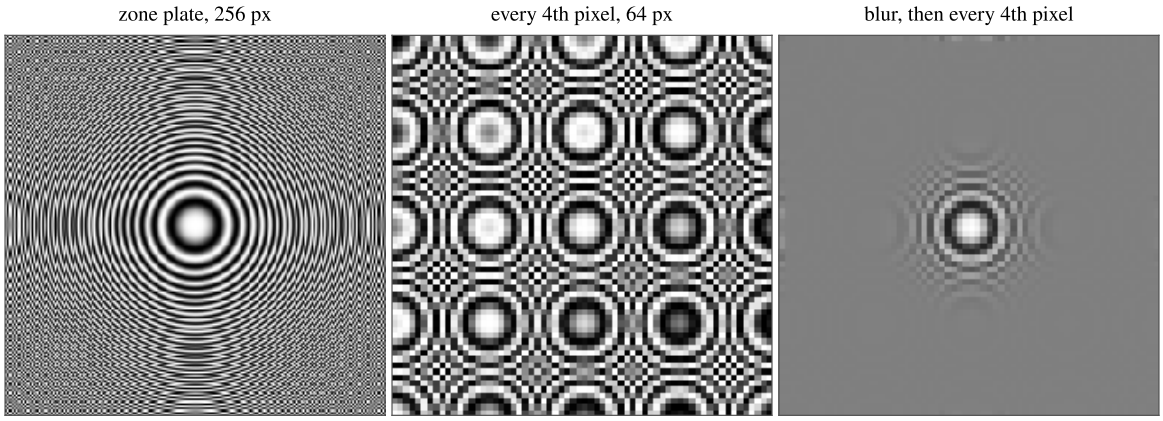



**Figure 21.2:** Aliasing in images. A "zone plate", whose spatial frequency increases away from the center (left), is shrunk four times by keeping every fourth pixel (middle) and by Gaussian blurring first (right). Naive sub-sampling creates false ring patterns; blurring removes the frequencies that cannot be represented.

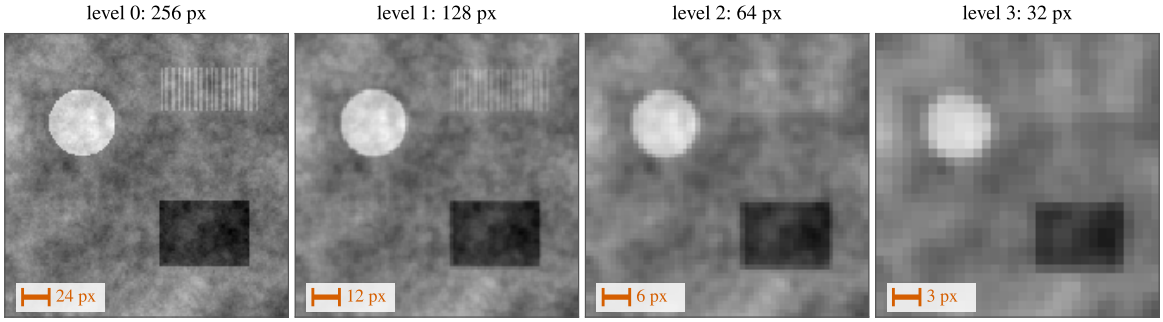



**Figure 21.3:** Four levels of a Gaussian pyramid of a textured synthetic image, displayed at a common size. Fine texture disappears level by level; coarse structure survives. A displacement of 24 px at level 0 is a displacement of 3 px at level 3.

Pyramids serve two purposes in the front end. Motion that is large in pixels at full resolution is small at coarse levels, where an iterative tracker can capture it (Chapter 22). And structures of different sizes are best detected at different scales.

## 21.5 Interpolation

Sub-pixel tracking needs image values and gradients at non-integer positions. Writing a position as $(u_0 + a, v_0 + b)$ with integer $(u_0, v_0)$ and fractional parts $a, b \in [0, 1)$:

- *nearest neighbor* takes the closest pixel: fast, but the result jumps as the position moves, which ruins sub-pixel accuracy;
- *bilinear interpolation* interpolates linearly in $u$ along the two neighboring rows and then linearly in $v$ between the results:

$$I(u_0 + a, v_0 + b) = (1 - a)(1 - b)\, I_{00} + a(1 - b)\, I_{10} + (1 - a)b\, I_{01} + ab\, I_{11}, \tag{21.5}$$

with $I_{ij} = I[u_0 + i, v_0 + j]$. The result is continuous, and the weights are the areas of the

rectangles opposite each corner;

- *bicubic* interpolation fits a smooth cubic patch to a $4 \times 4$ neighborhood; it has continuous derivatives at the cost of 16 pixels per sample.

Lucas–Kanade trackers use bilinear interpolation for both the image and its gradients. OpenCV's tracker works on 8-bit images with 14-bit fixed-point interpolation weights. On a noise-free synthetic image shifted by a known sub-pixel amount it is accurate to about a hundredth of a pixel, whatever its stopping threshold. The limit comes from the 8-bit intensities and the bilinear model, not from the arithmetic, and it lies well below the noise of real tracking.

## 21.6 Finding local maxima

Detectors compute a response map (corner strength, for example) and select the pixels where it is large *and* locally maximal. *Non-maximum suppression* keeps a pixel only if its response exceeds a threshold and is the largest in its neighborhood (a $3 \times 3$ window, or a larger radius to enforce spacing between detections). The location of a maximum can then be refined below the pixel grid by fitting a parabola through the response $r_{-1}, r_0, r_1$ at the maximum and its two neighbors in each direction; the vertex lies at the offset

$$\delta = \frac{r_{-1} - r_1}{2\,(r_{-1} - 2r_0 + r_1)} \tag{21.6}$$

pixels from the center. Sub-pixel accuracy at the detection stage is less important for tracking-based front ends, whose tracker refines positions anyway.

## 21.7 Photometric changes

Intensity-based methods assume that a scene point keeps its brightness between frames (Chapter 22). Auto-exposure, lighting changes and non-Lambertian surfaces violate this. A common model is an affine change, $I_2 \approx \alpha I_1 + \beta$. Gradients are unaffected by $\beta$, and comparing patches after subtracting their means and dividing by their standard deviations (*zero-mean normalized cross-correlation*) is unaffected by both. Some trackers estimate $\alpha$ and $\beta$ along with the motion; others pre-process images, for example with histogram equalization, to reduce the variation.

**Key takeaways**

- Filtering is convolution with a kernel; separable kernels cost $2k$ instead of $k^2$ per pixel.
- Gaussian smoothing reduces noise without ringing; variances of cascaded Gaussians add.
- Derivatives amplify noise; Sobel, Scharr and derivative-of-Gaussian kernels smooth and differentiate at once.
- Down-sampling without blurring aliases; a Gaussian pyramid blurs and halves

the resolution at each level.

- Bilinear interpolation gives continuous sub-pixel samples; non-maximum suppression and parabola fits localize detections.
- Normalize patches when brightness may change between frames.

## Exercises

**21.1** Show that the 2D Gaussian kernel is separable, and that filtering with it costs $2k$ operations per pixel for a $k$-tap kernel.

**21.2** Show that convolving $\frac{1}{2}[1, 1]$ with itself repeatedly produces the binomial kernels, and that their variance grows linearly with the number of convolutions.

**21.3** Compute the response of the Sobel kernel $S_u$ to a linear ramp $I(u, v) = cu$, and explain the factor 8.

**21.4** Generate a zone plate and reproduce Figure 21.2. How large must the blur be before shrinking by 4?

**21.5** Derive the bilinear interpolation formula by interpolating first along $u$ and then along $v$, and show that the result does not depend on the order.

**21.6** Derive the parabola-vertex formula for sub-pixel peak refinement.

## Solutions to the exercises

**21.1** The exponent splits, $e^{-(u^2+v^2)/2\sigma^2} = e^{-u^2/2\sigma^2}e^{-v^2/2\sigma^2}$, and so does the constant, $\frac{1}{2\pi\sigma^2} = \frac{1}{\sqrt{2\pi}\sigma}\cdot\frac{1}{\sqrt{2\pi}\sigma}$, so $G_\sigma(u,v) = g_\sigma(u)g_\sigma(v)$. Sampled on a square $k\times k$ grid the kernel is the outer product $h = gg^\mathsf{T}$ of the sampled 1D kernel, and normalizing each 1D kernel to unit sum normalizes the product too. Then

$$(h * I)[u,v] = \sum_j g[j]\Big(\sum_i g[i]\,I[u-i, v-j]\Big):$$

the inner sum filters every row with $g$ ($k$ multiplications per pixel) and the outer sum filters the columns of the result ($k$ more), $2k$ in total instead of $k^2$. For $\sigma = 1.5$ truncated at $\pm 3\sigma$ ($k = 11$) this is 22 instead of 121. Truncating to a *disk* instead of a square would destroy the factorization.

**21.2** The kernel $[a_0,\dots,a_n]$ corresponds to the polynomial $\sum_i a_i z^i$, and convolution of kernels is multiplication of polynomials. Convolving $\frac{1}{2}[1,1]$ with itself $n$ times gives $\big(\frac{1}{2}(1+z)\big)^n = 2^{-n}\sum_i \binom{n}{i} z^i$: the binomial kernels $\frac{1}{4}[1,2,1]$, $\frac{1}{8}[1,3,3,1]$, $\frac{1}{16}[1,4,6,4,1]$, .... A non-negative kernel with unit sum is a probability distribution, and the convolution of two distributions is the distribution of the sum of independent variables, whose variances add (Chapter 5). The two-point kernel $\frac{1}{2}[1,1]$ has variance $\frac{1}{4}$, so the $n$-fold kernel has variance $n/4$: $\frac{1}{2}$ for $[1,2,1]$, 1 for $[1,4,6,4,1]$. By the central limit theorem the binomial kernels approach Gaussians with $\sigma = \sqrt{n}/2$; OpenCV's `pyrDown` kernel is a Gaussian with $\sigma = 1$ px.

**21.3** At pixel $(u,v)$ the correlation sums $S_u[j,i]\,c\,(u+i)$. In each row the weights $-1,0,1$ give $c(u+1) - c(u-1) = 2c$, and the three rows are weighted $1,2,1$, so

$$(S_u \star I)[u,v] = (1+2+1)\cdot 2c = 8c,$$

everywhere, for a true derivative $I_u = c$. The factor 8 is the product of the smoothing kernel's sum (4) and the distance between the differenced pixels (2). Divide by 8 to obtain the gradient (by 32 for Scharr, whose smoothing kernel sums to 16). With convolution instead of correlation the kernel is flipped and the response is $-8c$: check the sign convention of whatever library you use.

**21.4** A zone plate $I = \frac{1}{2} + \frac{1}{2}\cos(\pi r^2/n)$ on an $n\times n$ grid (the figure uses $n = 256$) has phase $\pi r^2/n$, hence local frequency $r/n$ cycles per pixel. After keeping every fourth pixel the representable limit is $\frac{1}{8}$ cycle per original pixel, so the true rings beyond $r = n/8 = 32$ cannot be represented and should become uniform gray; instead, naive sub-sampling folds them into false rings, with new "centers" where the frequency is a multiple of the new sampling rate $\frac{1}{4}$. A Gaussian blur multiplies frequency $f$ by $e^{-2\pi^2\sigma^2 f^2}$. Measuring the false pattern in the region $48 < r < 128$:

| blur $\sigma$ (px) | 0 | 1 | 1.5 | 2 | 3 |
|---|---|---|---|---|---|
| RMS of false pattern | 0.353 | 0.061 | 0.018 | 0.005 | 0.002 |
| response at $f = \frac{1}{8}$ (kept detail) | 1 | 0.73 | 0.50 | 0.29 | 0.06 |
| response at $f = \frac{1}{4}$ (aliases to DC) | 1 | 0.29 | 0.06 | 0.007 | $10^{-5}$ |

A blur of $\sigma \approx 2$ px, half the shrink factor, removes the aliasing (as in Figure 21.2); much more also removes detail the smaller image could have kept. The same rule, $\sigma \approx s/2$ for a shrink by $s$, gives `pyrDown`'s $\sigma = 1$ for $s = 2$.

**21.5** Along the row $v_0$, linear interpolation gives $(1-a)I_{00} + aI_{10}$, and along the row $v_0 + 1$, $(1-a)I_{01} + aI_{11}$. Interpolating these linearly in $v$ with weights $1-b$ and $b$ gives the formula of Section 21.5. In the other order, the columns give $(1-b)I_{00} + bI_{01}$ and $(1-b)I_{10} + bI_{11}$, and interpolating in $u$ gives $(1-a)(1-b)I_{00} + (1-a)bI_{01} + a(1-b)I_{10} + abI_{11}$, the same four products. Without expanding: both results have the form $c_0 + c_1a + c_2b + c_3ab$ and take the four corner values at the corners, and those four conditions determine the four coefficients uniquely. The interpolant is linear along every row and column but quadratic along diagonals, and its derivatives jump at pixel boundaries.

**21.6** Fit $r(x) = Ax^2 + Bx + C$ through $(-1, r_{-1})$, $(0, r_0)$, $(1, r_1)$: $C = r_0$, $A + B + C = r_1$ and $A - B + C = r_{-1}$, so $B = \frac{1}{2}(r_1 - r_{-1})$ and $A = \frac{1}{2}(r_{-1} - 2r_0 + r_1)$. The vertex is at

$$\delta = -\frac{B}{2A} = \frac{r_{-1} - r_1}{2(r_{-1} - 2r_0 + r_1)}.$$

If $r_0$ is the largest of the three, $A < 0$ (a maximum), and $|r_{-1} - r_1| \le (r_0 - r_{-1}) + (r_0 - r_1) = 2|A|$, so $|\delta| \le \frac{1}{2}$: the refined peak stays within the pixel. Real peaks are not parabolas, and the fit is biased toward the pixel center: for a Gaussian peak of width $\sigma = 1$ px at a true offset of 0.3 px it returns 0.25, a bias of up to 0.05 px, larger for sharper peaks.

Chapter 22

# Feature Detection and Tracking

**In this chapter**

- Derive the structure tensor from the auto-correlation of an image patch, and understand corner detectors (Harris, Shi–Tomasi, FAST).
- Derive Lucas–Kanade optical flow from brightness constancy, as a Gauss–Newton problem, including the aperture problem.
- Implement iterative, pyramidal Lucas–Kanade tracking, and know its failure modes.
- Build a robust tracking pipeline: bucketing, forward-backward checks, IMU-aided prediction and geometric verification.
- Manage feature tracks through their life cycle with bounded memory.

The front end turns a stream of images into *feature tracks*: for each tracked scene point, the list of its undistorted normalized coordinates in the images where it was seen, with the image timestamps. Everything the MSCKF knows about the scene comes from these tracks, so their quality bounds the quality of the estimator.

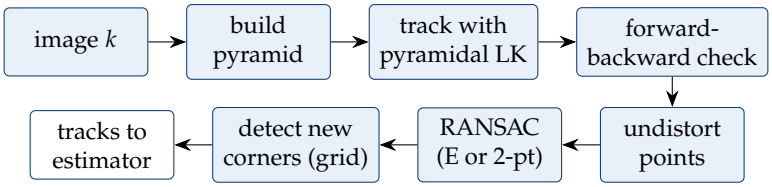



**Figure 22.1:** A KLT-based front end, as used by MSCKF-style estimators.

## 22.1 What makes a good feature

### 22.1.1 The auto-correlation of a patch

A feature is useful if it can be found again, precisely, in the next image. Consider a small window $W$ around a point and ask how much the window changes when shifted by a small displacement $d$. Measure the change by the weighted sum of squared differences

$$E(d) = \sum_{x \in W} w(x) \left(I(x+d) - I(x)\right)^2, \tag{22.1}$$

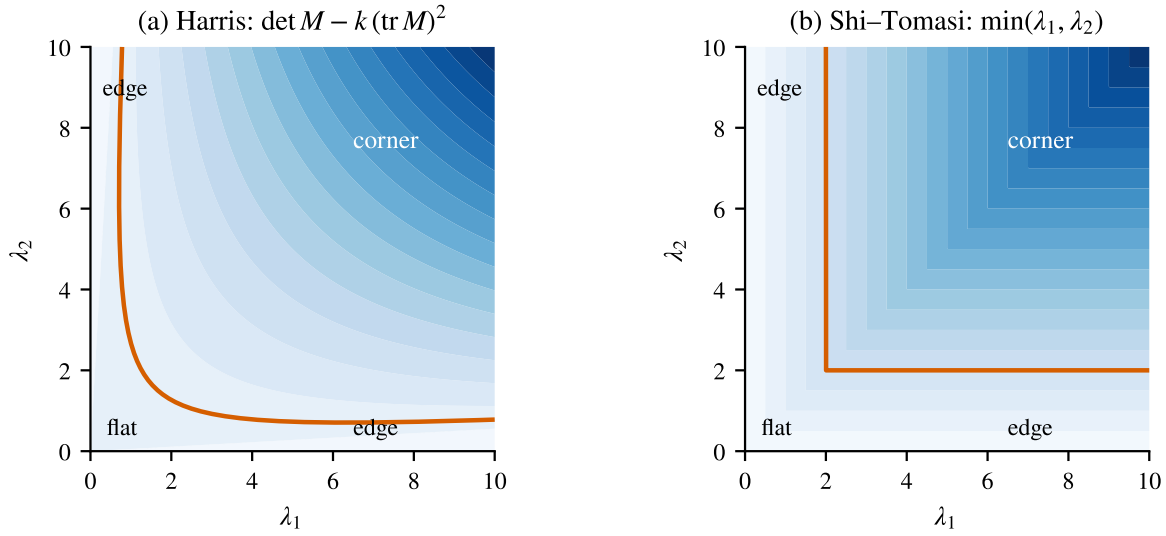



**Figure 22.2:** Corner scores over the plane of structure-tensor eigenvalues, with a threshold contour (orange). Both scores accept only windows with two large eigenvalues. Shi–Tomasi's $\min(\lambda_1, \lambda_2)$ is exactly the quantity that makes the Lucas–Kanade system well conditioned.

with a window function $w$ (uniform, or a Gaussian that emphasizes the center). By a first-order Taylor expansion $I(x + d) \approx I(x) + \nabla I(x)^\top d$, so

$$E(d) \approx \sum_{x \in W} w(x) \left(\nabla I(x)^\top d\right)^2 = d^\top M\, d, \qquad M = \sum_{x \in W} w(x) \begin{bmatrix} I_u^2 & I_u I_v \\ I_u I_v & I_v^2 \end{bmatrix}, \tag{22.2}$$

with the gradients $I_u, I_v$ computed as in Section 21.3. $M$ is the *structure tensor* (second-moment matrix) of the window: a symmetric PSD $2 \times 2$ matrix, so $E(d)$ is a quadratic form whose level sets are ellipses (Figure 2.4). Its eigenvalues $\lambda_1 \geq \lambda_2 \geq 0$ describe how distinctive the window is.

- Both small: the window is *flat*; it looks the same after any small shift.
- One large, one small: an *edge*; shifting along the edge (the eigenvector of $\lambda_2$) changes nothing.
- Both large: a *corner*; every shift changes the window, so its position is well defined in two dimensions.

By the Rayleigh quotient (Proposition 2.30), $\lambda_2$ is the smallest change $E(d)$ caused by any unit shift: the worst-case distinctiveness.

### 22.1.2 Corner detectors

The *Harris detector* [22] scores each pixel with $\det M - k(\operatorname{tr} M)^2 = \lambda_1\lambda_2 - k(\lambda_1 + \lambda_2)^2$, with $k \approx 0.04$–$0.06$, which avoids computing eigenvalues. The *Shi–Tomasi detector* [45] scores $\lambda_2 = \min(\lambda_1, \lambda_2)$ directly (Figure 22.2), computed in closed form for a $2\times2$ matrix as $\frac{1}{2}\big(\operatorname{tr} M - \sqrt{(\operatorname{tr} M)^2 - 4 \det M}\big)$. Both are followed by thresholding and non-maximum suppression. Shi–Tomasi has a deeper justification: it selects exactly the windows for which the tracker of the next section is well conditioned.

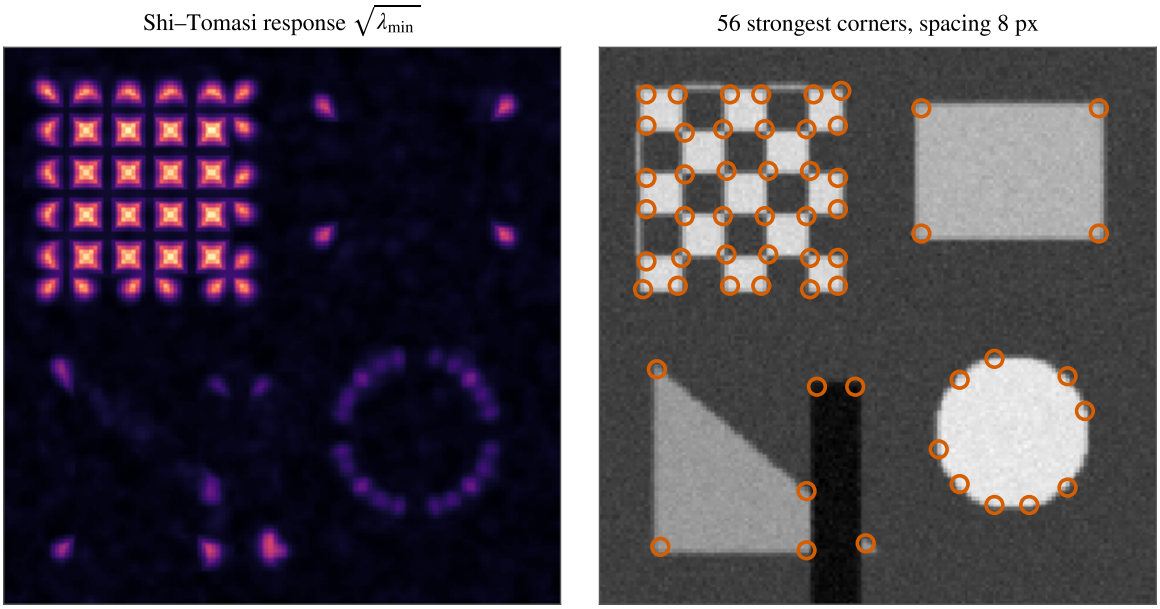



**Figure 22.3:** Shi–Tomasi corner response on a synthetic image (left), and the strongest corners after non-maximum suppression with a minimum spacing of 8 px (right). Edges and flat regions get low scores; corners and blob-like texture get high ones.

Other detectors trade quality for speed. FAST classifies a pixel as a corner if a long enough arc of the 16 pixels on a circle around it is uniformly brighter or darker than the center, using only comparisons; it is very fast but noisier. Detectors used for matching across large viewpoint changes add *scale* selection (detecting at several pyramid levels) and an *orientation* for each feature, as ORB does. A frame-to-frame tracker needs neither.

## 22.2 Lucas–Kanade optical flow

### 22.2.1 Brightness constancy and the aperture problem

Assume that a scene point keeps its brightness between consecutive frames, $I_{k+1}(x+d) = I_k(x)$, where $d$ is the image motion of the point. Linearizing in $d$,

$$I_{k+1}(x) + \nabla I^{\mathsf{T}} d \approx I_k(x) \quad \Longleftrightarrow \quad I_u\, d_u + I_v\, d_v + I_t = 0, \qquad I_t = I_{k+1}(x) - I_k(x). \tag{22.3}$$

This *optical-flow constraint* is one equation in two unknowns. It determines only the component of $d$ along the gradient: motion along an edge is invisible. This is the *aperture problem*, the same phenomenon seen through a small hole when a long line slides past: only its perpendicular motion is visible.

### 22.2.2 The Lucas–Kanade solution

Lucas and Kanade [36] assume the displacement is the same for all pixels of a small window, which provides many equations for the two unknowns, and solve (22.3) for all of them in the

least-squares sense:

$$\min_{d} \sum_{x \in W} w(x) \big( \nabla I(x)^{\mathsf{T}} d + I_t(x) \big)^2 \quad \Longrightarrow \quad M\, d = - \sum_{x \in W} w(x)\, I_t(x)\, \nabla I(x), \tag{22.4}$$

with the structure tensor $M$ of (22.2) as the normal matrix (Section 3.5). The system is solvable and well conditioned exactly when both eigenvalues of $M$ are large compared with the image noise: Shi and Tomasi's insight was to select features by the very criterion that makes them trackable. With image noise of variance $\sigma_I^2$ per pixel, the covariance of the estimated displacement is approximately $\sigma_I^2 M^{-1}$ (Proposition 9.3), so $1/\sqrt{\lambda_2}$ measures how precisely the worst direction is tracked.

### 22.2.3 Iterative refinement

Equation (22.4) rests on a linearization that holds only for small $d$. The full problem, minimizing $\sum_x w(x)(I_{k+1}(x + d) - I_k(x))^2$ over $d$, is a nonlinear least-squares problem, and Lucas–Kanade is its Gauss–Newton solution (Chapter 10):

**Algorithm 4** Iterative Lucas–Kanade for one feature

**Input:** images $I_k$, $I_{k+1}$; feature position $x_0$; initial guess $d$ (zero, or a prediction)

1: compute the template $T(x) = I_k(x)$ and its gradients over the window around $x_0$; compute $M$ and factor it
2: **repeat**
3: sample $I_{k+1}(x + d)$ over the window with bilinear interpolation (Section 21.5)
4: $e(x) \leftarrow I_{k+1}(x + d) - T(x)$ ▷ residual image
5: solve $M\, \Delta d = - \sum_x w(x)\, e(x)\, \nabla T(x)$
6: $d \leftarrow d + \Delta d$
7: **until** $\|\Delta d\| < 0.01$ px or the iteration limit is reached

Using the gradients of the *template* $T = I_k$ rather than of the warped image lets $M$ be computed and factored once per feature (the *inverse compositional* idea, analyzed by Baker and Matthews [2]). Sub-pixel accuracy comes from the bilinear interpolation. A few iterations usually suffice when the initial guess is within the window radius.

### 22.2.4 Pyramids

The linearization is valid only for displacements smaller than the scale over which the image gradient is roughly constant, about the window radius. Fast motion violates this: at 1 rad/s and 20 Hz, the image moves by about 23 px between frames. The remedy is a Gaussian pyramid (Section 21.4). Tracking starts at the coarsest level, where a 24-pixel motion becomes a 3-pixel motion; the result, doubled, initializes the next finer level, and so on down to full resolution (Figure 22.4) [7]. With $L$ levels above the base, the trackable displacement grows by about $2^L$.

### 22.2.5 When tracking fails

Lucas–Kanade fails when its assumptions fail: on edges and flat regions (an ill-conditioned $M$, the aperture problem); under occlusion, when the point disappears behind another object;

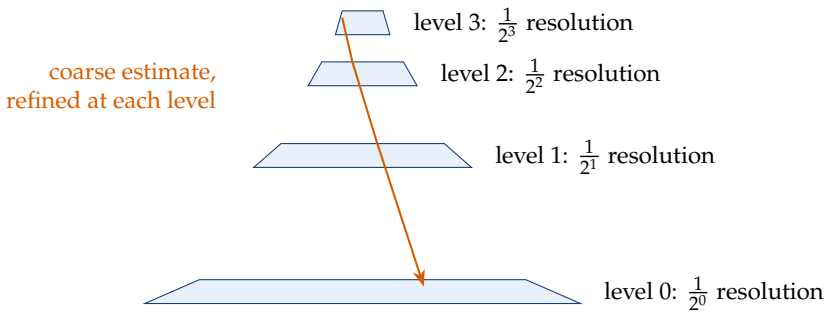



**Figure 22.4:** Pyramidal tracking. A displacement that is too large to linearize at full resolution is small at the top level; each level doubles the estimate and refines it.

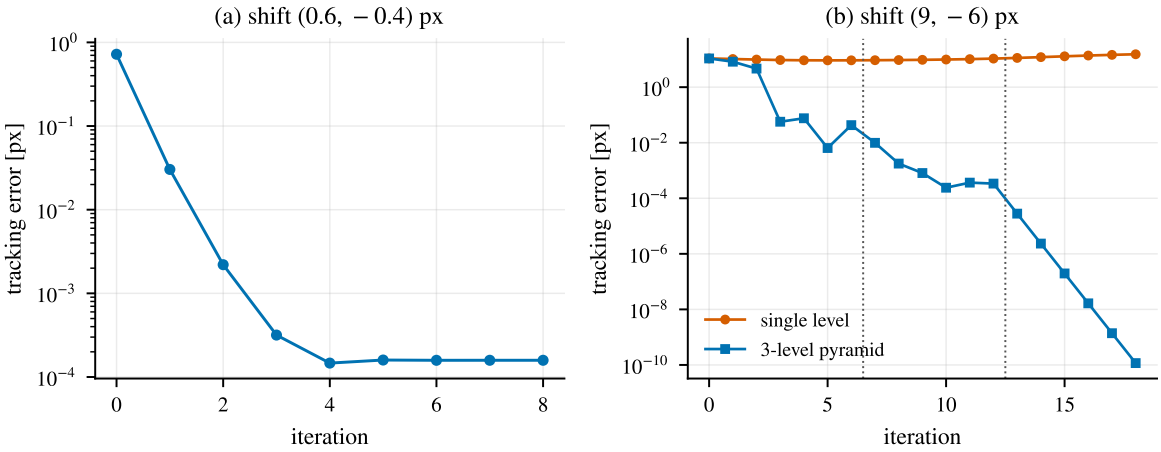



**Figure 22.5:** Lucas–Kanade on a synthetic textured image. (a) For a small shift of (0.6, −0.4) px, the tracking error falls by orders of magnitude in a few Gauss–Newton iterations. (b) For a shift of (9, −6) px, single-level tracking stalls in a wrong local minimum, while a three-level pyramid converges.

under strong brightness changes (Chapter 21); under motion blur, which smears the texture the tracker relies on; and when the window straddles a depth discontinuity, where the two halves move differently. Most failures go undetected by the tracker itself, which returns a confident but wrong position. Hence the checks of the next section.

## 22.3 Making tracking robust

Optical flow optimizes photometric similarity, not physical correctness. It will track the shadow of a moving object, a specular highlight, or a T-junction formed by two objects at different depths. Several layers of checks remove such tracks.

1. **Forward-backward consistency.** Track each point from frame $k$ to $k+1$, then back to $k$. A correct track returns to its starting point; reject it if the round-trip error exceeds a fraction of a pixel.
2. **IMU-aided prediction.** The gyroscope predicts the rotation between frames, $R_{c_2c_1} = R_{bc}^{\mathsf{T}} R_{b_1b_2}^{\mathsf{T}} R_{bc}$, where $R_{b_1b_2}$ is the integrated gyro rotation. For distant points, or a purely

rotating camera, image points move by the infinite homography (Chapter 20): in pixels, $\tilde{u}_2 \propto K R_{c_2 c_1} K^{-1} \tilde{u}_1$ (after undistortion). Starting LK from this prediction gives it a much better initial guess, and allows smaller windows and fewer pyramid levels.

3. **Geometric verification.** Reject tracks that violate the epipolar constraint, with essential-matrix or two-point RANSAC, or the rotation-only constraint under low parallax (Chapter 23).
4. **Statistical gating in the filter.** Tracks that pass all of the above are still gated by the $\chi^2$ test of the MSCKF update (Chapter 26).

### 22.3.1 Feature distribution

Asking a detector for the 200 strongest corners typically returns clusters on the most textured object in view. Clustered features constrain the motion poorly: features in a small patch of the image make rotation and translation hard to separate. The standard remedy is *grid bucketing*: divide the image into cells (for example $8 \times 6$) and cap the number of features per cell, plus a minimum distance between features. New features are detected only in cells that have fallen below their quota, using a mask around existing tracks. A uniform distribution of bearings makes the stacked measurement Jacobian better conditioned, which is exactly what the estimator needs.

## 22.4 The feature life cycle

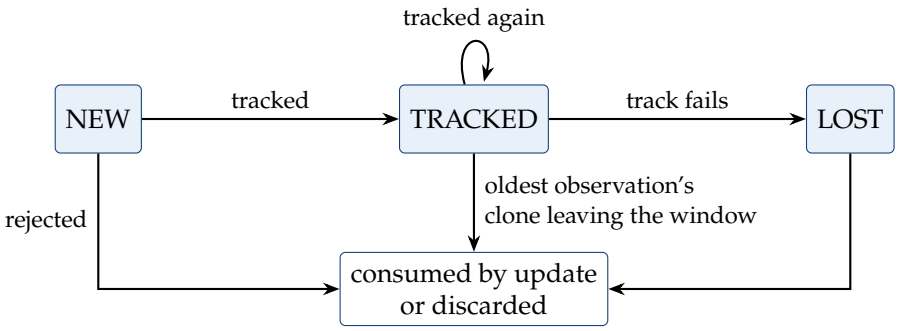



**Figure 22.6:** Feature life cycle. A track is handed to the MSCKF update when it is lost, or when its oldest observation is about to leave the sliding window (AGENTS.md F5). Its observations are used once and then discarded.

Each feature has a persistent ID and a history of observations: (clone index or image timestamp, normalized coordinates). Since the estimator can only use observations made at times that still have a clone in the window, the history never needs to exceed `kMaxClones` entries. That makes it possible to store all tracks in a fixed-capacity pool with fixed-capacity histories, so the steady state of the front end performs no allocation for its bookkeeping (Milestone 9).

**Pitfall: using a measurement twice**

Once a track's observations have been used in an MSCKF update, they must never be used again, not even partially. Re-using them double counts the same information and makes the filter overconfident. If a track continues after being used (because its oldest clone was marginalized), its subsequent observations start a fresh track.

## 22.5 Engineering the front end

The front end is the one component allowed to allocate (AGENTS.md E4), because OpenCV allocates internally, but it must reuse its buffers. In practice: keep the previous pyramid and swap it with the new one instead of rebuilding storage; preallocate point vectors with `reserve`; keep the `cv::Mat` objects as members so that their memory is reused when sizes do not change; and *measure* the remaining allocations rather than claiming they are zero. OpenCV takes the pixel buffers from its own `malloc`-based allocator, but it creates a small header with `new` for each one, so the `operator new` guard counts every new `cv::Mat` buffer, though not its size. A counting allocator installed with `cv::Mat::setDefaultAllocator` measures the bytes as well. Feature tracking is typically the most expensive part of the pipeline in time, too, so bucketing parameters, window size and pyramid depth are the main performance knobs.

Descriptor-based front ends (ORB, BRIEF) describe each feature by a binary string of intensity comparisons in its neighborhood and match features across frames by the Hamming distance between descriptors, rejecting ambiguous matches whose best and second-best distances are similar (the *ratio test*). They handle large viewpoint changes and re-detection after occlusion, which matters for loop closure, but for frame-to-frame VIO at 20 Hz KLT tracking is cheaper and more accurate. Direct methods skip features altogether and use photometric error in the estimator itself.

**Project link: Milestones 8 and 9**

M8 builds detection, bucketing, pyramidal LK with forward-backward checks, persistent IDs and point undistortion, and tests them on synthetic images with known sub-pixel motion. M9 adds the life-cycle manager with a fixed-capacity pool and essential-matrix RANSAC in normalized coordinates, including the documented pure-rotation behavior.

**Key takeaways**

- The structure tensor $M$, from a first-order expansion of the patch auto-correlation, measures how well a window's position is defined; corners have two large eigenvalues.
- Lucas–Kanade is Gauss–Newton on the patch alignment error; its normal matrix is $M$, so good corners are exactly the trackable windows.
- The aperture problem: a single pixel constrains only the flow along the gradient.
- Pyramids extend the trackable displacement; gyro prediction makes tracking cheaper and more robust.
- Bucketing spreads features for good geometry; forward-backward checks and

RANSAC remove bad tracks.

- Tracks are consumed exactly once and their histories are bounded by the window size.

## Exercises

**22.1** Compute the structure tensor of an ideal step edge and of an ideal corner, and verify the eigenvalue picture.

**22.2** Derive the closed-form smallest eigenvalue of a symmetric $2 \times 2$ matrix used by the Shi–Tomasi detector.

**22.3** Implement Algorithm 4 for a synthetic textured image translated by $(0.3, -0.7)$ pixels and reproduce Figure 22.5(a). What happens with a translation of 8 pixels, and how many pyramid levels fix it?

**22.4** Show that the forward-backward error of a correct track is due only to noise and interpolation, and estimate a sensible threshold.

**22.5** Compute the pixel displacement predicted by the gyroscope for a feature at the image center when the camera rotates by $0.05$ rad about its $y$-axis between frames.

**22.6** Implement grid bucketing and plot the feature distribution with and without it on a EuRoC image.

**22.7** Design the data structure for the feature pool with fixed capacity and per-feature histories bounded by `kMaxClones`. What happens when the pool is full?

## Solutions to the exercises

**22.1** For a straight edge with unit normal $n$, every gradient in the window is parallel to $n$, $\nabla I = g(x)\, n$, so

$$M = \Big( \sum_x w(x) g(x)^2 \Big)\, n n^\mathsf{T},$$

of rank one: eigenvalues $\lambda_1 = \sum_x w g^2$ and $\lambda_2 = 0$, with the null eigenvector along the edge. For a vertical step of height $h$ in a $15\times15$ uniform window with central differences, each row has two pixels with $I_u = h/2$, so $M = \operatorname{diag}(7.5h^2, 0)$. For an ideal corner (a bright quadrant) with the window centered on its tip, each edge covers half the window: $M = h^2 \left[\begin{smallmatrix} 4 & 0.25 \\ 0.25 & 4 \end{smallmatrix}\right]$ with eigenvalues $3.75h^2$ and $4.25h^2$, both large; the small off-diagonal entry comes from the tip pixel, where both gradients are non-zero. More generally, two edges of equal strength $c$ with normals at an angle $\alpha$ give $M = c(n_1 n_1^\mathsf{T} + n_2 n_2^\mathsf{T})$ with eigenvalues $c(1 \pm \cos\alpha)$: a right-angle corner is ideal, while a sharp wedge (normals $20^\circ$ apart, $\lambda_2 = 0.06c$) is poorly localized along its bisector.

**22.2** The characteristic polynomial of $M = \left[\begin{smallmatrix} a & b \\ b & c \end{smallmatrix}\right]$ is $\lambda^2 - (\operatorname{tr} M)\lambda + \det M$, so $\lambda = \frac{1}{2}\big(\operatorname{tr} M \pm \sqrt{(\operatorname{tr} M)^2 - 4 \det M}\big)$. The discriminant is

$$(a + c)^2 - 4(ac - b^2) = (a - c)^2 + 4b^2 \geq 0,$$

so both roots are real (as they must be for a symmetric matrix) and $\lambda_{\min} = \frac{1}{2}\big(a + c - \sqrt{(a - c)^2 + 4b^2}\big)$. Use the second form in code: $(\operatorname{tr} M)^2 - 4 \det M$ subtracts two nearly equal numbers when the eigenvalues are close, and rounding can make it slightly negative, which turns the square root into a NaN.

**22.3** On a texture smoothed with $\sigma = 2$ px (as in Figure 22.5) and a $21 \times 21$ window, the shift $(0.3, -0.7)$ gives errors of 0.76, 0.022 and 0.010 px after zero, one and two iterations, and then stalls at 0.010 px. The floor is the bias of bilinear interpolation, since the shifted image was generated with cubic interpolation. With cubic sampling the error keeps falling, as in the figure. For a shift of 8 px and a $15 \times 15$ window, single-level tracking is correct to 0.1 px from only 30–45% of window positions: elsewhere it converges to a wrong local minimum. The texture decorrelates over a few pixels (the autocorrelation is 0.58 at 3 px and 0.26 at 5 px), so the linearization holds only for displacements of about 2–3 px. With one pyramid level above the base, the displacement there is 4 px and 93–98% succeed; with two levels it is 2 px and all succeed. The rule: choose $L$ so that the largest expected displacement divided by $2^L$ is within the texture's correlation length.

**22.4** Let the true motion be $d$. The forward track returns $\hat{d}_f = d + e_f$ and the backward track, started at $x + \hat{d}_f$, returns $\hat{d}_b = -d + e_b$, where $e_f$ and $e_b$ are the estimation errors of the two tracks. The round-trip error is $\hat{d}_f + \hat{d}_b = e_f + e_b$: the true motion cancels exactly, whatever its size. For a track that converged to the right minimum, only the causes of estimation error remain: image noise, interpolation and the convergence tolerance. Without them, both tracks would be exact. Moreover, $e_b \approx -e_f$: the backward window is centered on $x + \hat{d}_f$, so both directions compare the same pixel pairs of the same two images. In a simulation with noise of 1% of the intensity range ($15 \times 15$ window), the

forward tracking error has a median of 0.03 px, but the round-trip error only 0.001 px (99th percentile 0.005 px), and $10^{-4}$ px without noise. The check tests self-consistency, not accuracy. Failures are a different matter: when half of the window is occluded in the second image, the median round-trip error is 1.7 px, and 97% exceed 0.1 px. Real images add deformation, blur and brightness change, which raise the errors of correct tracks, so a threshold of a few tenths of a pixel keeps a wide margin while catching most failures. Better still, set it from a histogram of round-trip errors on a real sequence: correct tracks form a sharp peak near zero and failures a long tail.

**22.5** A rotation by $\theta = 0.05$ rad about the camera's $y$-axis turns the optical axis toward $+x_c$, so $R_{c_2c_1} = R_y(\theta)^\mathsf{T}$. The feature at the principal point has bearing $(0, 0, 1)$, which becomes $R_y(\theta)^\mathsf{T}(0, 0, 1)^\mathsf{T} = (-\sin\theta, 0, \cos\theta)$, so

$$u_2 = c_u - f_u \tan\theta = c_u - 22.95, \qquad v_2 = c_v :$$

the feature moves 23 px to the left, the same as $KR_{c_2c_1}K^{-1}\tilde{u}_1$ gives. The prediction does not depend on depth; the neglected translation, 1 m/s over 50 ms at 5 m depth for example, adds only $f_u \cdot 0.05/5 \approx 4.6$ px, which LK recovers easily from the predicted start.

**22.6** Divide the image into cells (for example $8 \times 6$ cells of $94 \times 80$ px for EuRoC). Compute the corner response once, with non-maximum suppression and one global threshold. Then take candidates strongest first, skipping any in a cell that has reached its quota or within the minimum distance of an existing track or an already chosen corner. Count the existing features per cell before detecting, so that only depleted cells receive new ones. To evaluate, report two numbers: the fraction of occupied cells, and the spread of the feature bearings (the standard deviations along the principal axes of their covariance, after undistortion). The script `scripts/solutions/ch22_bucketing.py` does this for 150 corners, 10 px apart, with and without a quota of 4 per cell. It uses the first frame of `data/MH_01_easy` when the dataset is present. On a synthetic $752 \times 480$ image with one strongly textured region and weak texture elsewhere (one fifth of the contrast):

| selection | occupied cells | most corners in a cell | bearing spread (rad) |
|---|---|---|---|
| strongest 150 | 46% | 18 | 0.26 / 0.21 |
| bucketed, at most 4 per cell | 96% | 4 | 0.55 / 0.32 |

Without bucketing, every corner lies on the textured region and half of the view is empty. With bucketing, the corners cover nearly every cell, and the bearings spread twice as wide along the long axis of the image, which is what conditions the stacked Jacobian. Bucketing redistributes corners but cannot create texture: with a global threshold, cells whose texture is below it stay empty. That is the right outcome, since a corner too weak to pass the threshold is also too weak to track.

**22.7** A pool of fixed capacity $F_{\max}$ (at least the per-cell quota times the number of cells, plus room for tracks that are lost but not yet processed):

- an array of $F_{\max}$ track slots, each with a 64-bit ID, a status (free, new, tracked, lost), a count, and a fixed array of `kMaxClones` observations {clone ID or timestamp,

normalized $(x, y)$};

- a stack of free slot indices, so allocation and release are $O(1)$, and parallel fixed-capacity arrays of the current pixel positions and slot indices, which are what the LK call consumes;
- IDs that increase monotonically and are never reused, so stale references are detectable.

The history cannot overflow: when the oldest clone of a track leaves the window, the track is consumed (AGENTS.md F5), and any continuation starts a new history. If the pool is full, the simplest correct policy is to detect no new features until slots free up; the alternative is to evict the weakest (shortest or lowest-score) tracks. Either way the event is counted and logged, and the capacity is sized so that it does not happen in normal operation. Discarding a track loses information but never corrupts the estimate, unlike reusing one.

Chapter 23

# Multiple-View Geometry

**In this chapter**

- Derive the epipolar constraint, the essential and fundamental matrices, epipoles and epipolar lines.
- Recover relative motion from correspondences: the eight-point algorithm with normalization, the five-point and two-point methods, and the decomposition of the essential matrix.
- Understand homographies between views, the pure-rotation case, and the degeneracies of relative-pose estimation.
- Use RANSAC to reject outliers, size its iteration count, and set thresholds in the right units.
- Triangulate points by midpoint, linear and Gauss–Newton methods, and quantify triangulation accuracy.
- Understand bundle adjustment, its sparsity and its gauge freedom: the batch problem the MSCKF approximates.

## 23.1 Epipolar geometry

### 23.1.1 The epipolar constraint

Two cameras observe the same 3D point. Let the coordinates of the point in the two camera frames be $X_1$ and $X_2$, related by the rigid motion

$$X_2 = R\,X_1 + t, \qquad R = R_{c_2c_1}, \quad t = p_{c_2c_1}, \tag{23.1}$$

and let $\bar{x}_1 = X_1/Z_1$ and $\bar{x}_2 = X_2/Z_2$ be the bearings (homogeneous normalized coordinates).

**Theorem 23.1** (Epipolar constraint). *Every correspondence of a rigid point satisfies*

$$\bar{x}_2^{\mathsf{T}}\, E\, \bar{x}_1 = 0, \qquad E = [t]_\times R. \tag{23.2}$$

*Proof.* Cross both sides of $X_2 = RX_1 + t$ with $t$: $[t]_\times X_2 = [t]_\times R X_1$. The left side is orthogonal to $X_2$, so $X_2^{\mathsf{T}}[t]_\times R X_1 = 0$. Dividing by $Z_1 Z_2 > 0$ gives (23.2). ∎

Geometrically, the two camera centers and the 3D point span a plane, the *epipolar plane*, and the constraint states that the two viewing rays and the baseline are coplanar (Figure 23.1). The constraint involves no depth: it is a statement about bearings only, which is why it is the natural tool for checking tracks before any 3D reconstruction exists.

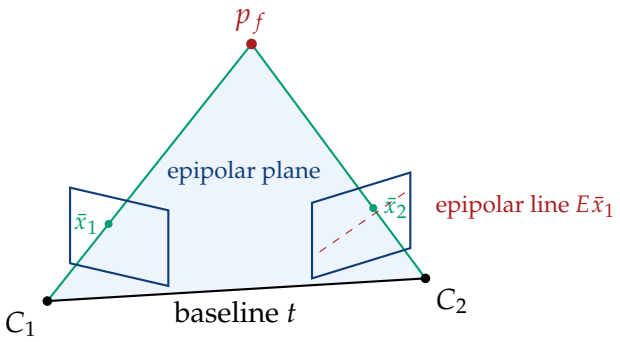



**Figure 23.1:** Epipolar geometry. The camera centers, the point and both viewing rays lie in one plane. The image of the point in the second camera must therefore lie on the line where that plane cuts the second image.

### 23.1.2 Epipolar lines and epipoles

Given $\bar{x}_1$, the vector $\ell_2 = E\bar{x}_1$ represents a line in the second image (Section 20.3), the *epipolar line*: the corresponding point must lie on it. Searching for a match can be restricted to this line. All epipolar lines in the second image pass through the *epipole* $e_2$, the image of the first camera center, which satisfies $e_2^\top E = 0$ (it is proportional to $t$); symmetrically $Ee_1 = 0$ with $e_1 \propto R^\top t$. When the camera moves forward, the epipole is the *focus of expansion* from which image points flow outward.

**Proposition 23.2** (Properties of the essential matrix)**.** *For $t \neq 0$, $E = [t]_\times R$ has rank two and two equal non-zero singular values, $(\|t\|, \|t\|, 0)$. It has five degrees of freedom: three for the rotation and two for the direction of $t$. Its overall scale, like the scale of $t$, is unobservable.*

*Proof.* $EE^\top = [t]_\times RR^\top [t]_\times^\top = -[t]_\times^2 = \|t\|^2 I - tt^\top$ by (2.10), whose eigenvalues are $\|t\|^2$ (twice, on the plane orthogonal to $t$) and 0 (along $t$). The singular values of $E$ are their square roots. ∎

In pixel coordinates, with $\tilde{u}_i = K\bar{x}_i$, the constraint reads $\tilde{u}_2^\top F \tilde{u}_1 = 0$ with the *fundamental matrix* $F = K^{-\top} E K^{-1}$ (seven degrees of freedom, rank two). The project works with undistorted normalized coordinates throughout, so it uses $E$ directly (Milestone 9).

## 23.2 Estimating relative motion

### 23.2.1 The eight-point algorithm

Equation (23.2) is linear in the nine entries of $E$. Writing $\bar{x}_1 = (x_1, y_1, 1)$ and $\bar{x}_2 = (x_2, y_2, 1)$, each correspondence gives one equation

$$a^\top e = 0, \qquad a = (x_2x_1,\ x_2y_1,\ x_2,\ y_2x_1,\ y_2y_1,\ y_2,\ x_1,\ y_1,\ 1), \qquad e = \mathrm{vec}_{\mathrm{rows}}(E). \tag{23.3}$$

With eight or more correspondences, stack them into $Ae = 0$ and take the unit vector minimizing $\|Ae\|$: the right singular vector of $A$ with the smallest singular value (Proposition 3.7). Noise makes the result an invalid essential matrix, which is projected onto the nearest valid

one by replacing its singular values with $(1, 1, 0)$ (Theorem 3.6 and Eckart–Young). When the algorithm is applied to pixel coordinates (to estimate $F$), the coordinates must first be *normalized* (translated to zero mean and scaled to unit average distance from the origin), or the matrix $A$, whose entries range from 1 to $10^5$, is so badly conditioned that the result is unusable; this is Hartley's normalization.

### 23.2.2 Decomposing the essential matrix

**Proposition 23.3** (Motion from the essential matrix). *Let $E = U\,\mathrm{diag}(1, 1, 0)V^{\mathsf{T}}$ with $U, V$ rotations (flip their signs if needed), and $W = \begin{bmatrix} 0 & -1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix}$. The rotation and translation direction are one of the four combinations*

$$R \in \{UWV^{\mathsf{T}},\ UW^{\mathsf{T}}V^{\mathsf{T}}\}, \qquad t \in \{+u_3,\ -u_3\}, \tag{23.4}$$

*where $u_3$ is the third column of $U$. Exactly one of the four places triangulated points in front of both cameras.*

The proof checks that $[u_3]_\times UWV^{\mathsf{T}}$ and $[u_3]_\times UW^{\mathsf{T}}V^{\mathsf{T}}$ both equal $E$ up to sign, and that no other factorizations exist. The four solutions correspond to the second camera being on either side of the first, facing either forward or backward; the *cheirality* test (positive depth of a triangulated point in both views) selects the physical one.

### 23.2.3 The five-point and two-point methods

Five correspondences are the minimum, since $E$ has five degrees of freedom. Nistér's algorithm [41] combines the linear constraints of five correspondences with the cubic constraints that characterize essential matrices ($\det E = 0$ and $2EE^{\mathsf{T}}E - \mathrm{tr}(EE^{\mathsf{T}})E = 0$) and solves the resulting polynomial system, returning up to ten candidates. Fewer points per hypothesis means fewer RANSAC iterations, which is why `cv::findEssentialMat` uses it.

In VIO the gyroscope supplies the relative rotation $R$ between consecutive frames with high accuracy. With $R$ known, (23.2) becomes linear in $t$:

$$\bar{x}_2^{\mathsf{T}}[t]_\times R\bar{x}_1 = t^{\mathsf{T}}\left(R\bar{x}_1 \times \bar{x}_2\right) = 0. \tag{23.5}$$

Each correspondence says that $t$ is orthogonal to the vector $c_i = R\bar{x}_1^{(i)} \times \bar{x}_2^{(i)}$, so two correspondences determine the direction of $t$ as $c_1 \times c_2$. A two-point hypothesis needs far fewer RANSAC iterations than a five-point one, and it is the outlier-rejection strategy of MSCKF-VIO [51].

### 23.2.4 Measuring the residual

The algebraic residual $\bar{x}_2^{\mathsf{T}}E\bar{x}_1$ has no geometric meaning. The geometric error of a correspondence is the smallest displacement of $\bar{x}_1$ and $\bar{x}_2$ that makes the constraint hold exactly.

Linearizing the constraint in that displacement gives the *Sampson distance*

$$d_S = \frac{(\bar{x}_2^\mathsf{T} E \bar{x}_1)^2}{(E\bar{x}_1)_1^2 + (E\bar{x}_1)_2^2 + (E^\mathsf{T}\bar{x}_2)_1^2 + (E^\mathsf{T}\bar{x}_2)_2^2}, \tag{23.6}$$

the squared residual divided by the squared norm of its gradient with respect to the four image coordinates: the first-order squared distance to the constraint surface. It is in the units of the coordinates used. With normalized coordinates, a pixel threshold $\tau_{px}$ must be converted to $\tau_{px}/f$ (Milestone 9).

**Pitfall: thresholds in the wrong units**

Calling `cv::findEssentialMat` on normalized coordinates with an identity camera matrix and a threshold of "1.0" accepts residuals of 1 normalized unit, about 450 pixels: every track becomes an inlier. The threshold must be $\tau_{px}/f$, e.g. $1/458 \approx 2.2 \times 10^{-3}$.

## 23.3 Homographies between views

**Planar scenes.** If all points lie on a plane $n^\mathsf{T} X_1 = d$ (unit normal $n$ and distance $d$ in the first camera's frame), then $1 = n^\mathsf{T} X_1/d$ and $X_2 = RX_1 + t\, n^\mathsf{T} X_1/d$, so

$$X_2 = \left(R + \frac{t\, n^\mathsf{T}}{d}\right) X_1, \qquad \bar{x}_2 \propto H\bar{x}_1, \quad H = R + \frac{t n^\mathsf{T}}{d}. \tag{23.7}$$

**Pure rotation.** If $t = 0$, $X_2 = RX_1$ for every point, at any depth: $\bar{x}_2 \propto R\bar{x}_1$, the *infinite homography*. In pixels it is $KRK^{-1}$.

A homography has eight degrees of freedom and is estimated from four or more correspondences by a direct linear transform: each correspondence gives two linear equations in the nine entries of $H$ (from $\tilde{x}_2 \times H\tilde{x}_1 = 0$), solved by Proposition 3.7.

## 23.4 RANSAC

Random Sample Consensus [15] estimates a model from data containing outliers by hypothesis and verification.

**Algorithm 5** RANSAC

**Input:** data, minimal sample size $s$, threshold $\tau$, confidence $p$

1: best $\leftarrow \emptyset$; $N \leftarrow \infty$; $k \leftarrow 0$
2: **while** $k < N$ **do**
3: draw $s$ data points at random; fit candidate models
4: count inliers with residual $< \tau$; keep the model with the most inliers
5: update $N$ from the current inlier ratio $w$ with (23.8); $k \leftarrow k + 1$
6: refit the model on all inliers of the best hypothesis (least squares)

If a fraction $w$ of the data are inliers, a random minimal sample is outlier-free with probability $w^s$, and $N$ independent samples all contain an outlier with probability $(1 - w^s)^N$. Requiring

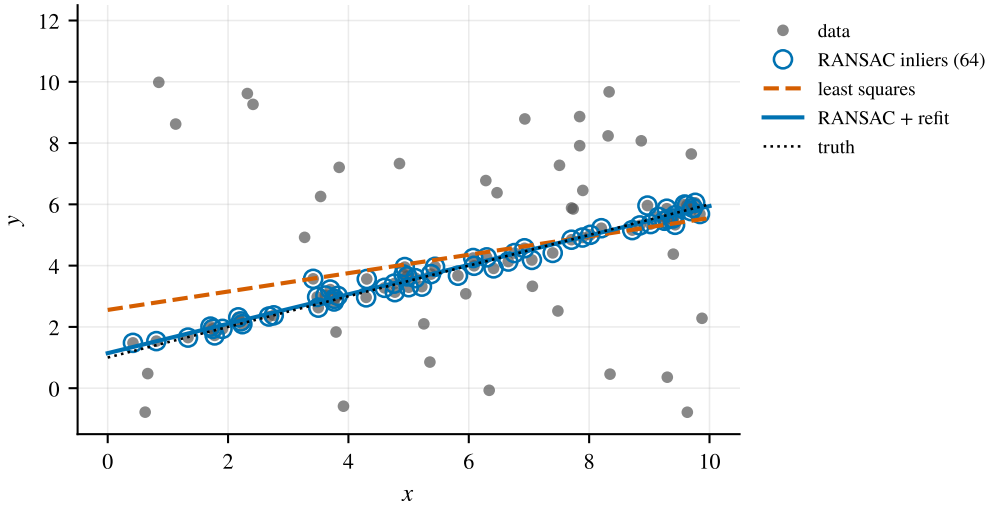



**Figure 23.2:** Fitting a line to data with 40% gross outliers. Least squares is dragged away by the outliers; RANSAC finds the line supported by the most inliers (circled) and refits it to them.

this to be at most $1 - p$ gives the number of iterations

$$N = \frac{\log(1 - p)}{\log(1 - w^s)}. \tag{23.8}$$

| $p = 0.99$ | $w = 0.9$ | $w = 0.7$ | $w = 0.5$ |
|---|---|---|---|
| 8-point ($s = 8$) | 9 | 78 | 1177 |
| 5-point ($s = 5$) | 6 | 26 | 146 |
| 2-point ($s = 2$) | 3 | 7 | 17 |

The exponential dependence on $s$ is why minimal solvers matter, and why using the gyroscope to remove three unknowns pays off. Since $w$ is unknown in advance, the algorithm starts pessimistic and updates $N$ from the best inlier ratio found so far (adaptive termination). Variants score hypotheses by the sum of truncated residuals (MSAC) rather than the inlier count, or refine the best hypothesis locally (LO-RANSAC).

## 23.5 Degeneracies

### 23.5.1 Pure rotation

If the camera only rotates, $t = 0$ and $E = [0]_\times R = 0$: the epipolar constraint is satisfied by every pair of points, inlier or not. Under small translation the problem is not degenerate but badly conditioned: $t$ is poorly determined, inlier sets fluctuate, and RANSAC may reject good tracks or accept bad ones. Hovering drones rotate in place often, so this case must be handled (Milestone 9).

Under pure rotation the correspondences satisfy the stronger constraint $\bar{x}_2 \propto R\bar{x}_1$ (Section 23.3), which does not involve $t$ at all. A robust front end measures the parallax remaining after rotation compensation, for example the median of $\|\pi(R\bar{x}_1) - \pi(\bar{x}_2)\|$ over the tracks:

- if it is large, run essential-matrix (or two-point) RANSAC;
- if it is tiny, skip epipolar RANSAC and reject only tracks that violate the rotation-only prediction $\bar{x}_2 \propto R\bar{x}_1$, with $R$ from the gyroscope.

Either way the system keeps tracking: low parallax means the features carry little information about translation, not that they are wrong. The MSCKF update handles them gracefully, because their nullspace-projected residuals simply contribute little.

### 23.5.2 Other degeneracies

The eight-point algorithm is degenerate when all points lie on a plane, a common situation (floors, walls), because a homography then explains the data equally well; the five-point algorithm is not. Very distant points behave like points at infinity and carry only rotational information. Moving objects form a second, consistent rigid motion that RANSAC can mistake for the dominant one if they fill the image.

## 23.6 Triangulation

Given observations $z_i$ of a point in cameras with known poses $(R_{wc_i}, p_{wc_i})$, triangulation estimates its world position $p_f$.

### 23.6.1 The midpoint method

Each observation defines a ray $p_{wc_i} + \lambda_i r_i$ with direction $r_i = R_{wc_i}\bar{x}_i$. With noise the rays do not intersect. The midpoint method finds the point closest to all rays in the least-squares sense: the distance of $p$ from ray $i$ is $\|(I - \hat{r}_i\hat{r}_i^\mathsf{T})(p - p_{wc_i})\|$ with $\hat{r}_i$ the unit direction, so

$$\Big(\sum_i (I - \hat{r}_i\hat{r}_i^\mathsf{T})\Big)\, p = \sum_i (I - \hat{r}_i\hat{r}_i^\mathsf{T})\, p_{wc_i}. \tag{23.9}$$

It is simple and geometric, but it minimizes 3D distances rather than image errors, which weights distant views wrongly.

### 23.6.2 Linear triangulation

In camera $i$ the point has coordinates $X_i = R_{wc_i}^\mathsf{T}(p_f - p_{wc_i})$, which must be parallel to the bearing $\bar{x}_i = (z_i, 1)$: $[\bar{x}_i]_\times X_i = 0$. Substituting,

$$[\bar{x}_i]_\times R_{wc_i}^\mathsf{T}\, p_f = [\bar{x}_i]_\times R_{wc_i}^\mathsf{T}\, p_{wc_i}, \qquad i = 1, \dots, M. \tag{23.10}$$

Each view contributes three equations of rank two. Stacking all views gives an overdetermined linear system $Ap_f = b$ that is solved in the least-squares sense with QR or SVD. With two views and noise-free data the solution is exact. This is the linear initialization of AGENTS.md F5. It minimizes an algebraic error, not the reprojection error, so it is refined next.

### 23.6.3 Nonlinear refinement with inverse depth

The maximum-likelihood estimate minimizes the reprojection error (Chapter 10)

$$\min_{p_f} \sum_{i=1}^{M} \left\| z_i - \pi(X_i(p_f)) \right\|^2. \tag{23.11}$$

The MSCKF [40] parameterizes the point in an *anchor* camera $A$ (for example the first observation) by inverse depth [10]:

$$X_A = \frac{1}{\rho}\begin{bmatrix}\alpha\\ \beta\\ 1\end{bmatrix}, \qquad X_i = R_{iA}X_A + p_{iA} \quad \Longrightarrow \quad h_i := \rho X_i = R_{iA}\begin{bmatrix}\alpha\\ \beta\\ 1\end{bmatrix} + \rho\, p_{iA}, \quad z_i = \pi(h_i), \tag{23.12}$$

where $(R_{iA}, p_{iA})$ is the transformation from the anchor camera to camera $i$, computed from the clone poses, and $\pi(h_i) = \pi(X_i)$ because projection ignores scale. The parameters $(\alpha, \beta)$ are the normalized coordinates in the anchor view and $\rho = 1/Z_A$ is the inverse depth. This parameterization behaves well for distant points ($\rho \to 0$ is a regular point), and the measurement function is nearly linear in $(\alpha, \beta, \rho)$. Its Jacobian follows from the chain rule:

$$\frac{\partial z_i}{\partial(\alpha, \beta, \rho)} = \left.\frac{\partial \pi}{\partial h}\right|_{h_i} \begin{bmatrix} r_1 & r_2 & p_{iA}\end{bmatrix}, \tag{23.13}$$

where $r_1, r_2$ are the first two columns of $R_{iA}$ and $\partial\pi/\partial h$ is Proposition 20.2. Gauss–Newton (Algorithm 1) iterates $\delta y = -(J^\mathsf{T}J)^{-1}J^\mathsf{T}e$ with the stacked Jacobian $J$ and residual $e$, usually converging in a few iterations from the linear initialization. Levenberg–Marquardt damping adds robustness.

### 23.6.4 How accurate is triangulation?

For two views separated by a baseline $b$ perpendicular to the viewing direction, the depth is $Z = b/d$ with $d$ the disparity in normalized coordinates. With independent noise $\sigma_{uv}$ in each view, $\sigma_d = \sqrt{2}\sigma_{uv}$, and since $\partial Z/\partial d = -b/d^2 = -Z^2/b$, to first order

$$\sigma_Z \approx \frac{Z^2}{b}\sqrt{2}\,\sigma_{uv}. \tag{23.14}$$

Depth error grows quadratically with depth and inversely with baseline. Equivalently, the relative depth error is inversely proportional to the parallax angle $\approx b/Z$.

Figure 23.3 shows that 10% depth accuracy needs about 2° of parallax, a baseline of 17 cm at 5 m. Down to about 1° (23.14) still describes the bulk of the estimates; below that, outliers take over. At 0.5°, 4% of the estimates are off by more than five standard deviations, and at 0.25°, 8% of the depths come out negative. A triangulation module must therefore check its own result before handing it to the filter:

- positive depth in every view (cheirality);
- sufficient parallax (or baseline relative to depth), or equivalently a well-conditioned Gauss–Newton Hessian;

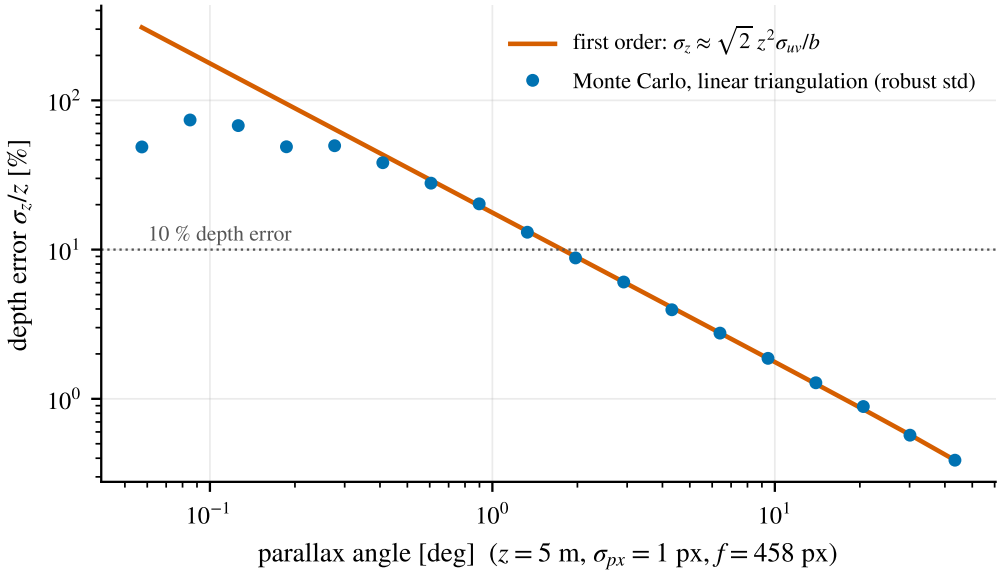



**Figure 23.3:** Relative depth error of two-view triangulation at $Z = 5$ m with 1-pixel noise, versus parallax angle. Down to about 1° the first-order formula (23.14) describes the spread accurately. Below that the error distribution becomes heavy-tailed (depths can even become negative), and the estimate is unusable.

- small reprojection error in every view after refinement;
- a plausible depth range.

Features that fail are discarded, not fed to the update (AGENTS.md F5, Milestone 10b).

## 23.7 Bundle adjustment

*Bundle adjustment* estimates all camera poses and all 3D points at once by minimizing the total reprojection error,

$$\min_{\{T_i\},\{p_j\}} \sum_{(i,j)\ \text{observed}} \left\| z_{ij} - \pi\left(T_i^{-1} p_j\right) \right\|^2_{R^{-1}}, \tag{23.15}$$

with Gauss–Newton or Levenberg–Marquardt on the manifold of poses (Chapter 10). It is the gold standard of geometric vision. Two of its properties illuminate VIO.

- *Structure.* Each residual involves one camera and one point, so the normal equations have the block structure of Section 10.8: eliminating the points with the Schur complement leaves a small *reduced camera system* (Figure 10.3).
- *Gauge freedom.* Moving and rotating everything together, or (for a monocular camera) scaling everything, leaves all reprojection errors unchanged: the problem has seven unobservable directions, and $J^\top W J$ is singular along them. Solvers fix the gauge by holding the first camera fixed and the scale constant, or by adding a weak prior. With an IMU, scale and two rotation directions (roll and pitch) become observable, and the gauge shrinks to the four directions of Chapter 29.

The MSCKF can be understood as a fast, filtered approximation of bundle adjustment over a sliding window: it eliminates each point exactly as the Schur complement does (Chapter 26), takes a single Gauss–Newton step, and summarizes the past by the filter's Gaussian prior instead of relinearizing it.

**Pose from known points.** Finally, when the 3D points are known (a map), a single image determines the camera pose: the *perspective-n-point* (PnP) problem, solved minimally from three points and refined by Gauss–Newton. It is the core of relocalization against a map, a capability that odometry lacks.

**Key takeaways**

- Rigid correspondences satisfy $\bar{x}_2^\mathsf{T}[t]_\times R\bar{x}_1 = 0$; $E$ has 5 DOF, singular values $(\|t\|, \|t\|, 0)$, and an unobservable scale.
- The eight-point algorithm is linear (normalize pixel coordinates first); $E$ decomposes into four motions, one of which passes the cheirality test.
- With the rotation from the gyroscope, two correspondences determine the translation direction.
- Planes and pure rotations relate views by homographies; under pure rotation $E$ vanishes and the rotation-only constraint takes over.
- RANSAC iterations grow as $w^{-s}$: prefer minimal solvers. Thresholds in normalized units are $\tau_{px}/f$.
- Triangulate linearly, refine by Gauss–Newton with inverse depth, and reject low-parallax or negative-depth points; depth error grows as $Z^2/b$.
- Bundle adjustment is the batch problem; the MSCKF approximates it with exact landmark elimination and a single Gauss–Newton step.

## Exercises

**23.1** Verify Theorem 23.1 numerically for random points and a random relative pose, then show that adding an outlier breaks it.

**23.2** Prove Proposition 23.2 and show that $e_2 \propto t$ is the left null vector of $E$.

**23.3** Implement the eight-point algorithm with and without Hartley normalization on pixel coordinates, and compare the errors.

**23.4** Implement the decomposition of Proposition 23.3 and the cheirality test, and verify on synthetic data that the correct solution is selected.

**23.5** Implement the two-point method with known rotation inside RANSAC on synthetic data with 30% outliers. Compare the number of iterations needed with the five-point method.

**23.6** Generate a pure-rotation sequence, observe what `cv::findEssentialMat` returns, and implement the parallax test.

**23.7** Show that (23.10) has rank two per view and that two views with non-parallel rays give a unique solution.

**23.8** Derive (23.14), reproduce Figure 23.3, and repeat with three views over the same baseline.

**23.9** Count the gauge freedoms of monocular bundle adjustment and of visual-inertial bundle adjustment, and explain the difference.

## Solutions to the exercises

**23.1** With 20 random points at 3–8 m and a random relative pose, $|\bar{x}_2^\mathsf{T} E \bar{x}_1| \leq 3 \times 10^{-17}$: rounding error. Moving one observation in the second image by 27 px gives an algebraic residual of $8 \times 10^{-3}$ and a Sampson distance $\sqrt{d_S}$ of 5.4 px. Only the component of the error perpendicular to the epipolar line is visible (7.7 px of the 27 px here), and the Sampson distance spreads it over both images ($7.7/\sqrt{2} = 5.4$). A two-view check cannot detect an error *along* the epipolar line at all; a third view, or the filter's own gating, must catch those.

**23.2** Since $RR^\mathsf{T} = I$ and $[t]_\times^\mathsf{T} = -[t]_\times$, $EE^\mathsf{T} = -[t]_\times^2 = \|t\|^2 I - tt^\mathsf{T}$ ((2.10)). Every vector orthogonal to $t$ is an eigenvector with eigenvalue $\|t\|^2$, and $t$ itself has eigenvalue 0, so the singular values of $E$ are $(\|t\|, \|t\|, 0)$ and its rank is two. Degrees of freedom: $R$ has three and $t$ three, but the constraint $\bar{x}_2^\mathsf{T} E \bar{x}_1 = 0$ is homogeneous, so $E$ and $\lambda E$ (i.e. $t$ and $\lambda t$) are indistinguishable: $3 + 2 = 5$. Scaling the scene and the baseline together leaves every bearing unchanged, so the scale of $t$ cannot be recovered from images. For the epipoles,

$$t^\mathsf{T} E = t^\mathsf{T} [t]_\times R = -([t]_\times t)^\mathsf{T} R = -(t \times t)^\mathsf{T} R = 0, \qquad E(R^\mathsf{T} t) = [t]_\times t = 0.$$

The left null vector is $t$, the coordinates of the first camera center in the second frame ($X_1 = 0 \Rightarrow X_2 = t$), so $e_2 \propto t$ is its image. Likewise $e_1 \propto R^\mathsf{T} t$ is the image of the second center ($X_2 = 0 \Rightarrow X_1 = -R^\mathsf{T} t$).

**23.3** With 60 points, 0.5 px noise and 200 random scenes, recovering $(R, t)$ from $E = K^\mathsf{T} F K$:

| | $\sigma_1/\sigma_8$ of $A$ | rotation error median / 90% | direction of $t$ median / 90% |
|---|---|---|---|
| raw pixels | $1.5 \times 10^5$ | 0.33° / 1.6° | 2.5° / 11° |
| Hartley-normalized | 66 | 0.16° / 0.34° | 1.1° / 2.4° |

In pixels, the columns of $A$ range from 1 to $10^5$, so the smallest singular vector is dominated by rounding and by the noise in the large entries. Normalization makes all columns comparable. It halves the typical error and removes the bad cases, which matter most inside RANSAC.

**23.4** Take the SVD of $E$, flip the sign of $U$ or $V$ if its determinant is $-1$ (allowed, since $E$ is defined up to sign), and form the four candidates. For each, triangulate every correspondence (two depths from $\lambda_2 \bar{x}_2 = \lambda_1 R \bar{x}_1 + t$ by least squares) and count the points with both depths positive. In 500 random scenes, the true solution won every time, with all points in front of both cameras. For each wrong candidate, *all* points failed: in a typical scene one candidate put them in front of the first camera but behind the second, and the other two put them behind the first. With noisy data, use the count, not a requirement that every point pass.

**23.5** With $R$ known, each correspondence gives $c_i = R\bar{x}_1^{(i)} \times \bar{x}_2^{(i)}$, the hypothesis is $t \propto c_i \times c_j$, and inliers have $\sqrt{d_S}$ below the threshold (2 px). For 100 correspondences with 1-pixel noise and 30% outliers, adaptive RANSAC stopped after 9.8 iterations on average

($\lceil \log 0.01/\log(1-0.7^2) \rceil = 7$ at the true ratio; the observed ratio is slightly lower because the threshold rejects some inliers). After refitting $t$ to all inliers (the unit $t$ minimizing $\sum(t^\mathsf{T} c_i)^2$), the median direction error was 0.6°; 4.6% of the inliers were rejected (the expected rate of a $2\sigma$ threshold) and 1.3% of the outliers accepted (those lying near their epipolar line by chance). The five-point method needs $\lceil \log 0.01/\log(1-0.7^5) \rceil = 26$ iterations at the same confidence, each solving a degree-10 polynomial and scoring up to ten candidates, against one cross product. The price of the two-point method is its dependence on the gyroscope: a rotation error $\delta$ shifts predicted points by about $f\delta$ pixels, so the threshold must cover the gyro error accumulated between frames.

**23.6** With $t = 0$, every correspondence satisfies $\bar{x}_2 \propto R\bar{x}_1$, so $\bar{x}_2^\mathsf{T}[t]_\times R\bar{x}_1 = \bar{x}_2^\mathsf{T}(t \times R\bar{x}_1) = 0$ for *every* $t$. The data fit the whole family $E = [t]_\times R$, and the eight-point matrix $A$ has three singular values at the noise level instead of one. In simulation, a randomly chosen $t$ combined with the true $R$ fits 68–70% of the tracks to within 1 px, exactly the fraction the true model fits with 1-pixel noise.

Running `cv::findEssentialMat` (RANSAC, 2 px threshold) on 150 synthetic tracks, 30 of them wrong by about 40 px, with four random seeds gave four unrelated translation directions, for example $(-0.33, 0.21, 0.92)$ and $(-0.16, 0.31, -0.94)$. The rotation returned by `cv::recoverPose` was still accurate to 0.1–0.3°. Nothing else in the output signals the problem: 112–118 of the 150 tracks were inliers and 2–4 of the wrong ones slipped in, much as for a camera translating 10 cm sideways (105–113 inliers, 0–5 wrong ones accepted). Only the translation is garbage, and it looks like any other answer. (At that small parallax even the translating case is fragile: two of its four seeds put $t$ more than 40° off.) The parallax test detects the situation. The median of $\|\pi(R\bar{x}_1) - \pi(\bar{x}_2)\|$ over the good tracks was 1.5–1.8 px under pure rotation (noise only) and 8.4–9.3 px for the sideways motion with points at 3–8 m. A threshold of a few pixels separates the two regimes. Below it, check tracks only against $\bar{x}_2 \propto R\bar{x}_1$ (`scripts/solutions/ch23_opencv.py`).

**23.7** The matrix $[\bar{x}_i]_\times$ has rank two (its nullspace is $\bar{x}_i$), and multiplying by the invertible $R_{wc_i}^\mathsf{T}$ keeps the rank, so each view contributes three equations of rank two. For two views, $p$ is in the nullspace of the stacked matrix if and only if $R_{wc_i}^\mathsf{T} p \parallel \bar{x}_i$ for both views, i.e. $p$ is parallel to both ray directions $r_i = R_{wc_i}\bar{x}_i$. If the rays are not parallel, only $p = 0$ qualifies: the $6 \times 3$ matrix has full column rank, and the least-squares solution is unique. Parallel rays (zero parallax) leave a one-dimensional nullspace, the position along the ray.

**23.8** With the baseline perpendicular to the viewing direction, $Z = b/d$ with disparity $d = x_1 - x_2$. The two noises are independent, so $\sigma_d = \sqrt{2}\sigma_{uv}$, and to first order $\sigma_Z = |\partial Z/\partial d|\,\sigma_d = (b/d^2)\sqrt{2}\sigma_{uv} = (Z^2/b)\sqrt{2}\sigma_{uv}$. A Monte Carlo at $Z = 5$ m with 1-pixel noise reproduces the figure: relative errors of 17.7%, 8.8%, 3.5%, 1.8% at parallax angles of 1°, 2°, 5°, 10°, matching the formula. For three views at 0, $b/2$ and $b$, write the observations as $x_i = X/Z - s_i/Z + n_i$, with $s_i$ the camera positions along the baseline. The inverse depth $1/Z$ is the *slope* of a straight-line fit of $x_i$ against $s_i$, with variance $\sigma_{uv}^2/\sum_i(s_i - \bar{s})^2$. A view at the mean position $\bar{s}$ adds nothing to this sum: three views give the same depth accuracy as two (simulation: within 2%), and five equally spaced views improve it by only 11%. Depth accuracy is bought with baseline; intermediate

views add redundancy, which is what outlier detection and the MSCKF's nullspace projection need.

**23.9** Monocular bundle adjustment has seven gauge freedoms: a global translation (3), a global rotation (3) and a global scale (1) leave all reprojection errors unchanged. Visual–inertial bundle adjustment has four: translation (3) and rotation about the gravity direction (1). The accelerometer measures specific force in the body frame, and the residuals compare it with $R_{wb}^{\mathsf{T}}(a_w - g_w)$ for the fixed $g_w$. A global rotation about a horizontal axis would tilt the trajectory relative to gravity and change these residuals, so roll and pitch are observable. A rotation about the vertical leaves $g_w$ invariant and changes nothing. Scale becomes observable because the IMU measures metric accelerations, which a scaled trajectory would contradict, provided the motion actually accelerates (at constant velocity, scale is unobservable again). Consequently, fix the gauge of a visual–inertial problem with the first position and yaw only: fixing roll and pitch as well would inject false information.

Part VI

# The Multi-State Constraint Kalman Filter

Chapter 24

# From EKF-SLAM to the MSCKF

**In this chapter**

- Understand how EKF-SLAM uses visual landmarks, and why it scales poorly.
- Understand the central idea of the MSCKF: constraints between multiple past poses instead of landmarks.
- See why past poses must be kept in the state, with their correlations.
- Relate the MSCKF to sliding-window optimization.

## 24.1 EKF-SLAM

The most direct way to use a camera in an EKF is to put the landmarks in the state. With $L$ landmarks,

$$x = \left(x_I,\ p_{f_1},\ \ldots,\ p_{f_L}\right), \qquad \dim \delta x = 15 + 3L, \tag{24.1}$$

and each image observation $z = \pi(p_c(x_I, p_{f_j})) + n$ is an ordinary EKF measurement of the IMU state and one landmark. This is EKF-SLAM, and MonoSLAM [11] showed it can run in real time with a single camera.

### 24.1.1 How it works

**Prediction.** Landmarks are static, so only the IMU block is propagated: exactly the block structure of clones in Chapter 17, $P_{II} \leftarrow \Phi P_{II}\Phi^\mathsf{T} + Q_d$, $P_{IL} \leftarrow \Phi P_{IL}$, with the landmark block unchanged.

**Update.** An observation of landmark $j$ has a Jacobian with two non-zero blocks: one for the IMU pose and one for landmark $j$, $H = [H_I\ \ 0\ \cdots\ 0\ \ H_{f_j}\ \ 0\ \cdots]$. The gain $K = PH^\mathsf{T}S^{-1}$ is nevertheless dense: every landmark correlated with the robot or with landmark $j$ is corrected. This is how EKF-SLAM "closes loops": re-observing an old landmark corrects the robot, which through the correlations corrects every other landmark. It is also what makes it expensive.

**Landmark initialization.** A new landmark enters the state as a function of the current state and the first measurement, $p_f = g(x_I, z)$. This is the state augmentation of Proposition 25.1: $P \leftarrow JPJ^\mathsf{T} + J_z R J_z^\mathsf{T}$ with $J = [I;\ \partial g/\partial x]$ and $J_z = [0;\ \partial g/\partial z]$. For a monocular camera, $g$ needs a depth that a single measurement does not provide, which leads to the initialization problem below.

### 24.1.2 Why it scales poorly

EKF-SLAM has three structural problems.

1. **Cost.** The covariance has $(15 + 3L)^2$ entries, and every update touches all of them: the Joseph update costs $O(n^2)$ per scalar measurement at best. Tracking 200 landmarks gives a $615 \times 615$ covariance; updating it at 20 Hz with hundreds of observations per frame is expensive, and the cost grows quadratically with the map.
2. **Initialization.** A single monocular observation says nothing about depth. A new landmark must be initialized with a huge depth uncertainty, which is highly non-Gaussian in Euclidean coordinates, or its initialization must be delayed until it has been seen from several viewpoints. Inverse-depth parameterizations [10] help, but add complexity.
3. **Housekeeping.** Landmarks that leave the field of view must either stay in the state, growing it, or be marginalized, which in covariance form is cheap but discards their future value.

## 24.2 The multi-state constraint

Consider a feature observed in $M$ images taken at times $t_1, \ldots, t_M$. Each observation constrains the pose at its time and the feature position. Taken together, after the unknown feature position is eliminated, the $2M$ observations impose $2M - 3$ constraints *on the $M$ poses alone*. This is the *multi-state constraint*: geometric information about how the camera moved between the images, with the scene point serving only as an intermediary.

**Key idea: the MSCKF in one sentence**

Keep a sliding window of past poses in the state instead of landmarks; when a feature track is complete, triangulate it, linearize its observations, and eliminate the feature by projecting onto the left nullspace of its Jacobian, leaving a residual that depends only on the poses; then update.

Mourikis and Roumeliotis [40] showed that this uses all the information that the observations carry about the poses (under linearization), at a cost linear in the number of features. Feature positions are never part of the state, so there is no landmark initialization problem inside the filter, and features leaving the view simply trigger an update.

## 24.3 Why past poses must be in the state

Why not keep only the current IMU state and use the constraint between the current pose and the past ones? Because the past poses are *estimated* quantities, with errors correlated with the current state's error: they were all produced by the same propagation from the same measurements. A measurement relating the current pose to a past pose estimate, which treats that past estimate as fixed or independent, double counts information and makes the filter overconfident.

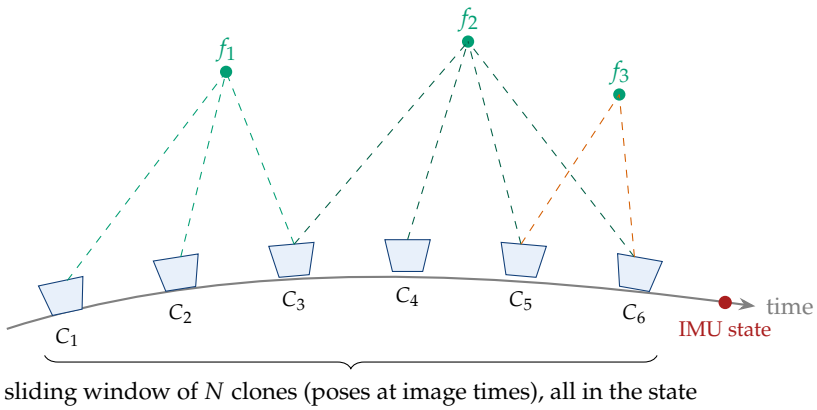



**Figure 24.1:** The MSCKF state: the current IMU state plus clones of past camera poses. Feature $f_1$ is seen by clones 1–3 and constrains them; $f_2$ by clones 3–6. Neither feature is in the state. Feature $f_3$ has only two observations so far and keeps being tracked.

The cure is *stochastic cloning* [43]. When an image is captured, a copy of the current pose (a clone) is appended to the state, together with its exact correlations to everything else. From then on the clone is a state variable whose estimate can be corrected by later measurements, and whose correlation with the evolving IMU state is propagated exactly. Chapter 25 develops this in detail.

## 24.4 The MSCKF state

The project's state (AGENTS.md C3) is the IMU state plus $N \le$ `kMaxClones` clones, each holding the IMU pose $(p_{wb}, q_{wb})$ at an image timestamp:

$$x = \big(\, p,\ v,\ q,\ b_a,\ b_g,\ \ p_1, q_1,\ \ldots,\ p_N, q_N \,\big), \qquad \dim \delta x = 15 + 6N. \tag{24.2}$$

The camera pose of clone $i$ is derived through the fixed extrinsics, $R_{wc_i} = R_{wb_i} R_{bc}$ and $p_{wc_i} = p_{wb_i} + R_{wb_i} p_{bc}$. With `kMaxClones` $= 10$, the error state has 75 dimensions, independent of how many features are tracked.

## 24.5 Relation to sliding-window optimization

Optimization-based VIO (OKVIS [33], VINS-Mono [42]) keeps a similar window of poses and minimizes the sum of squared reprojection and IMU residuals over poses *and* landmarks, relinearizing at every iteration, then marginalizes old states into a Gaussian prior. The MSCKF update is equivalent to a single Gauss–Newton iteration of such a problem, with the landmarks eliminated by a Schur complement and the prior given by the filter's covariance. Eliminating a landmark by nullspace projection and by Schur complement give the same information about the poses (Theorem 26.1). The differences are that the MSCKF never relinearizes past measurements, and processes each feature track exactly once, which makes it cheaper and more predictable, at some cost in accuracy under strong nonlinearity.

## 24.6 Variants

The basic MSCKF has been refined in many directions. MSCKF 2.0 [34] added First-Estimates Jacobians for consistency and online calibration of extrinsics and time offset. Hybrid filters keep long-lived features in the state as SLAM landmarks while processing short tracks MSCKF-style. MSCKF-VIO [51] uses a stereo camera and two-point RANSAC for fast flight, and OpenVINS [18] is a modular research platform that implements most of these options and documents them carefully.

**Key takeaways**

- EKF-SLAM keeps landmarks in the state; its cost grows quadratically with the map.
- The MSCKF keeps past poses (clones) instead; each feature track is turned into constraints on those poses.
- Past poses must be in the state, with their correlations, or information is double counted.
- The MSCKF update is equivalent to one Gauss–Newton step of sliding-window bundle adjustment with landmarks marginalized.

## Exercises

**24.1** Estimate the memory and the per-update flop count of EKF-SLAM with 200 landmarks and of the MSCKF with 10 clones.

**24.2** A feature is observed in $M$ images. How many scalar constraints does it impose on the poses? Why does the count start being useful only at $M = 2$, and why does the project require $M \geq 3$?

**24.3** Explain in your own words why using a past pose estimate as if it were known exactly makes the filter overconfident. Construct a scalar example.

## Solutions to the exercises

**24.1** *EKF-SLAM, 200 landmarks:* $n = 15 + 600 = 615$, so $P$ has 378 225 entries, 3.0 MB in double precision. One image observation has a Jacobian with 18 non-zero columns, so $PH^\mathsf{T}$ costs about $2 \cdot 615 \cdot 18 \cdot 2 \approx 44$ kflop, but the covariance update $P - KSK^\mathsf{T}$ touches every entry, about $4n^2 \approx 1.5$ Mflop. With 100 observations per frame this is about 160 Mflop per frame, 3 Gflop/s at 20 Hz, and it grows with the square of the map. (A dense Joseph form, $\approx 4n^3$, would cost almost 1 Gflop per update.) *MSCKF, 10 clones:* $n = 75$, so $P$ has 5 625 entries, 45 kB, small enough to stay in cache. An update with 50 features of 6 observations stacks $50 \cdot (12 - 3) = 450$ rows after nullspace projection (about 0.3 Mflop for the projections). QR compression to 75 rows costs about 4.8 Mflop, and the EKF update with 75 rows, Joseph form included, about 6 Mflop: roughly 11 Mflop per update. The memory is 70 times smaller and the flops more than ten times fewer. More importantly, the MSCKF's cost does not depend on how many features are being tracked, only on how many are processed.

**24.2** The $2M$ scalar observations involve the 3 unknown coordinates of the feature, so after eliminating the feature $2M - 3$ constraints remain on the poses. With $M = 1$ there are none: the two numbers do not even determine the feature, whose depth stays free. With $M = 2$ there is one, the epipolar (coplanarity) constraint between the two poses (Exercise 26.3). Each further view adds two. The project requires $M \geq 3$ because a two-view track is a weak and fragile measurement. Its triangulation rests on the baseline between two consecutive images, often a few centimeters, so the linearization point is poor. Its single projected residual gives the $\chi^2$ gate one degree of freedom, too little to reject a bad match. And the track has no redundancy with which to check the triangulation itself. The information it would contribute is small, and the risk is not.

**24.3** The past estimate $\hat{x}_1$ and the current estimate $\hat{x}_2$ were produced by the same propagation from the same measurements, so their errors are correlated. Treating $\hat{x}_1$ as exact turns a *relative* measurement into an *absolute* one, credited with an accuracy the anchor does not have. Scalar example: $x_1 \sim \mathcal{N}(\hat{x}_1, \sigma_1^2)$, $x_2 = x_1 + w$ with $w \sim \mathcal{N}(0, q)$, and $z = x_2 - x_1 + v$ with $v \sim \mathcal{N}(0, r)$; take $\sigma_1^2 = q = r = 1$.

- *Correct (cloning):* $x_1$ is kept as a state, $H = [-1 \;\; 1]$, and the posterior covariance of $(x_1, x_2)$ is $\left[\begin{smallmatrix} 1 & 1 \\ 1 & 1.5 \end{smallmatrix}\right]$. The variance of $x_2$ drops from 2 to 1.5, and that of $x_1$ is unchanged.
- *Wrong:* $z + \hat{x}_1$ is used as a measurement of $x_2$ with variance $r$. The filter claims $\mathrm{Var}(x_2) = 2 \cdot 1/3 = 0.67$, but the actual error variance is $\sigma_1^2 + (1 - K)^2 q + K^2 r = 1.56$ with $K = \frac{2}{3}$ (a Monte Carlo agrees): overconfident by a factor 2.3, and less accurate than the correct filter.

Repeating such anchored updates makes it worse: after 20 steps the claimed variance has settled at 0.62 while the actual error variance has grown to 11.6, like a random walk. The filter believes it is localized when it is drifting.

Chapter 25

# Stochastic Cloning and the Sliding Window

**In this chapter**

- See, on a scalar example, why relative measurements require cloned states with correlations.
- Derive the general state-augmentation formula $P \leftarrow JPJ^{\mathsf{T}}$.
- Derive the project's cloning Jacobian and the invariance property of cloning.
- Marginalize the oldest clone in place without allocation, and choose a window policy and size.

## 25.1 A scalar example

Let $x$ be a scalar position that performs a random walk, $x_{k+1} = x_k + w_k$ with $\mathrm{Var}(w_k) = Q$, and suppose its current estimate has variance $P$. At time 1 we *clone* it, $x_c := x_1$; between times 1 and 2 the state moves; then a sensor measures the displacement:

$$z = x_2 - x_c + n, \qquad \mathrm{Var}(n) = R. \tag{25.1}$$

Augmenting the state with the clone gives the vector $(x, x_c)$. At the moment of cloning both entries are the *same* random variable, so their joint covariance is $\begin{bmatrix} P & P \\ P & P \end{bmatrix}$, which is singular. Propagating $x$ but not $x_c$ gives

$$P_{\text{aug}} = \begin{bmatrix} P+Q & P \\ P & P \end{bmatrix}, \qquad H = \begin{bmatrix} 1 & -1 \end{bmatrix}. \tag{25.2}$$

The innovation covariance and gain are

$$S = (P+Q) - 2P + P + R = Q + R, \qquad K = \frac{1}{Q+R}\begin{bmatrix} Q \\ 0 \end{bmatrix}. \tag{25.3}$$

The result is exactly right: a displacement measurement is informative only about what happened *between* the two times, so $S$ involves only $Q$ and $R$. The update corrects the current state by the part of its uncertainty that arose after the clone, and leaves the clone untouched. The posterior variance of $x_2$ is $P + Q - Q^2/(Q+R)$, which stays large if $P$ is large, as it must: a relative measurement cannot reveal absolute position.

Now suppose we had treated the past estimate as known (no clone, zero variance). Then $S = P + Q + R$ and the posterior variance of $x_2$ would be $(P+Q)R/(P+Q+R)$, which tends

to $R$ when $P$ is large. The filter would believe it had learned the absolute position to within the sensor noise from a displacement measurement: a severe overconfidence. Treating the past estimate as an independent random variable is wrong in a different way. Only the exact cross-covariance gives the right answer, and stochastic cloning [43] is the mechanism that keeps it.

## 25.2 State augmentation

**Proposition 25.1** (Augmentation with a function of the state)**.** *Let $x$ have error covariance $P$, and append a new variable $y = g(x)$ whose error satisfies $\delta y \approx J_g\,\delta x$. The augmented error $(\delta x, \delta y) = J\,\delta x$ with $J = \begin{bmatrix} I \\ J_g \end{bmatrix}$ has covariance*

$$P \leftarrow JPJ^\mathsf{T} = \begin{bmatrix} P & PJ_g^\mathsf{T} \\ J_gP & J_gPJ_g^\mathsf{T} \end{bmatrix}. \tag{25.4}$$

*Proof.* Proposition 5.7 with the linear map $J$. ∎

The augmented covariance has rank $\dim x$: it is singular, because $y$ is a deterministic function of $x$ at the moment of augmentation. This is correct and harmless. Propagation adds process noise to the IMU block only, after which the clone and the current state are no longer perfectly correlated. The Joseph form and symmetrization keep the matrix positive semi-definite throughout.

## 25.3 The project's clone

At an image timestamp, after propagating the IMU state to exactly that time, the filter appends a clone holding the current pose $(p_{wb}, q_{wb})$, and augments the covariance with the cloning Jacobian (AGENTS.md F5).

**Derivation exercise (project Jacobian): the cloning Jacobian $J$**

The clone's error is defined with the same retraction as the IMU pose (AGENTS.md C4): $p_c = \hat{p}_c + \delta p_c$ and $q_c = \hat{q}_c \otimes \mathrm{Exp}_q(\delta\theta_c)$, with $\hat{p}_c = \hat{p}$ and $\hat{q}_c = \hat{q}$ at cloning time.

1. At the moment of cloning the true clone equals the true IMU pose. Express $\delta p_c$ and $\delta\theta_c$ in terms of the IMU error state. Is any linearization needed?
2. Write $J_g \in \mathbb{R}^{6\times(15+6N)}$ and then $J \in \mathbb{R}^{(21+6N)\times(15+6N)}$, with the new clone appended at the end of the state.
3. What would change if the clone stored the *camera* pose $(p_{wc}, q_{wc})$ instead of the IMU pose? (The project deliberately does not do this.)

**Check:** Milestone 10a requires that after cloning, the new clone's covariance block and its cross-covariances equal the corresponding IMU pose blocks *exactly*, and that a run with cloning enabled but only pose updates reproduces the IMU estimate and covariance of a run without cloning to $10^{-10}$.

*Worked solution: Appendix E.4 (page 352).*

**Proposition 25.2** (Cloning does not change the IMU marginal)**.** *Augmentation, propagation with static clones, and marginalization of clones leave the marginal distribution of the IMU state unchanged, provided no measurement involves the clones.*

*Proof.* Augmentation leaves the $P_{II}$ block unchanged by (25.4). Propagation updates $P_{II}$ by $\Phi P_{II}\Phi^\mathsf{T} + Q_d$ regardless of the clones. Marginalization deletes clone rows and columns. A measurement that involves only the IMU state has a Jacobian with zero clone columns; its gain for the IMU block, $P_{II}H_I^\mathsf{T}S^{-1}$, and $S = H_I P_{II} H_I^\mathsf{T} + R_z$ do not involve the clones either. ■

This is the invariance test of Milestone 10a. It is a powerful end-to-end check of the augmentation, propagation and marginalization code, because any indexing error in the clone blocks leaks into the IMU block and breaks the equality.

## 25.4 Clones in propagation and updates

Clones are static (Chapter 17): propagation multiplies their cross-covariance with the IMU state by $\Phi$ and leaves the clone-clone block alone. Visual measurements depend only on clone states, so their Jacobians are zero in the IMU columns. The update nevertheless corrects the IMU state, through the gain rows $P_{IC}H_C^\mathsf{T}S^{-1}$: information about relative motion between past poses corrects the current velocity, attitude and biases through the correlations built up by propagation. Injection and reset (Section 14.5) apply to every clone, each with its own $I - \frac{1}{2}[\delta\hat{\theta}_i]_\times$ block.

## 25.5 Marginalizing the oldest clone

When the window holds `kMaxClones` clones and a new image arrives, the oldest clone must go. In covariance form, marginalization is deletion of its six rows and columns (Theorem 5.11). Before deleting it, the filter must process every feature that has an observation at that clone (AGENTS.md F5), because those observations become unusable once the clone is gone.

**Implementation note: in-place deletion without allocation**

$P$ is stored in a fixed-max-size matrix whose active part is the top-left $n \times n$ corner. Deleting the block at offset $o$ means shifting every row below it up by six and every column to its right left by six, then reducing $n$ by six. The source and destination regions overlap. Copying toward lower indices in ascending order is safe, because each element is read before it is overwritten (`std::copy` permits overlapping ranges when the destination begins before the source), but an Eigen block assignment between overlapping blocks of the same matrix is an aliasing hazard whose traversal order is not guaranteed. Write the shift explicitly, or through a preallocated member workspace, and test it against a reference built with a dynamic matrix (Milestone 10a).

The clone states themselves are stored in a fixed-capacity container, such as a ring buffer of $N_{max}$ poses with timestamps, so that removing the oldest is a pointer move. If the covariance blocks are kept in the same order as the container, a ring-buffer layout could even avoid the shift, at the cost of more complex index arithmetic. Simplicity is usually the better choice here: the shift costs $O(n^2)$ once per image.

## 25.6 Window policy and size

The project uses the simplest policy: first in, first out. Each image creates a clone, and the oldest is marginalized when the window is full. More elaborate policies keep clones that are geometrically useful: if the vehicle barely moved since the previous image, marginalize the second-newest clone instead of the oldest, so that the window spans a longer baseline.

The window size trades accuracy for cost.

- **Longer windows** let longer tracks be used in full, with more parallax, and give each update more constraints.
- **Cost** grows as $O(n^3)$ per update with $n = 15 + 6N$, and as $O(n^2)$ per IMU step for the cross-covariance propagation.
- **Memory**: a fixed-max covariance of doubles occupies $8(15 + 6N_{max})^2$ bytes: 45 kB for $N_{max} = 10$, 146 kB for 20, 304 kB for 30. Workspaces for $H$, $S$ and $K$ add similar amounts.

**Pitfall: the stack budget**

Fixed-max-size Eigen matrices store their maximum-size buffer *inline*, with no heap allocation. That is what makes them allocation-free, but it also means a filter object constructed on the stack carries all of its matrices on the stack. With the default 1 MB main-thread stack on Windows, a filter with a few hundred kilobytes of workspaces can overflow it. Construct the filter once, during the load phase, as a heap object (for example with `std::make_unique`), which the memory tiers allow, and keep the large matrices as members rather than function-local temporaries (AGENTS.md E4, Milestone 10a).

**Key takeaways**

- A relative measurement between a past and a present state needs the past state in the filter, with its exact correlations. Treating the past estimate as known makes the filter overconfident.
- Augmentation with $y = g(x)$ uses $P \leftarrow JPJ^\mathsf{T}$, $J = [I; J_g]$; the result is singular at first and becomes regular after propagation.
- Cloning, static propagation and marginalization leave the IMU marginal unchanged; this is a strong test.
- Marginalizing a clone deletes its rows and columns, after first processing its features. Shift in place carefully.
- Fixed-max matrices live inline: keep them as members of a heap-allocated filter.

## Exercises

**25.1** In the scalar example, compute the posterior covariance of $(x_2, x_c)$ and verify that the clone's variance is unchanged. When would a relative measurement change the clone's estimate?

**25.2** Extend the scalar example to two clones and two displacement measurements, and show that processing them gives the same result as one measurement of $x_2 - x_{c_1}$ followed by one of $x_{c_2} - x_{c_1}$, if correlations are kept.

**25.3** Implement in-place deletion of a $6 \times 6$ block from a $75 \times 75$ symmetric matrix stored in a larger buffer, and test it against a reference.

**25.4** For $N_{max} = 10, 20, 30$, estimate the flop count of one MSCKF update with 50 features of 6 observations each, with and without QR compression (Chapter 26).

## Solutions to the exercises

**25.1** With $H = [1 \quad -1]$, $HP_{\text{aug}} = [\,Q \;\; 0\,]$ and $K = [Q \;\; 0]^{\mathsf{T}}/(Q+R)$, so

$$P^{+} = P_{\text{aug}} - KHP_{\text{aug}} = \begin{bmatrix} P + Q - \dfrac{Q^2}{Q+R} & P \\ P & P \end{bmatrix}.$$

The clone's variance and its covariance with $x_2$ are unchanged ($P = Q = R = 1$ gives $\left[\begin{smallmatrix} 1.5 & 1 \\ 1 & 1 \end{smallmatrix}\right]$). The clone's gain is $\mathrm{Cov}(x_c, x_2 - x_c)/S$, and here $x_2 - x_c = w$ is independent of $x_c$. A relative measurement corrects the clone whenever this covariance is not zero: if an absolute measurement of $x_2$ was made after cloning, if the dynamics are not a pure random walk ($x_2 = ax_1 + w$ with $a \neq 1$), or if other correlated states such as a velocity link them. For example, after an absolute fix of $x_2$ with unit variance the covariance is $\frac{1}{3}\left[\begin{smallmatrix} 2 & 1 \\ 1 & 2 \end{smallmatrix}\right]$, the relative measurement's gain is $(0.2, -0.2)$, and the clone's variance falls from 0.67 to 0.6: information flows back in time, as in a smoother. In the MSCKF this is the normal case: a feature seen by several clones corrects all of them.

**25.2** Clone $x_{c_1}$ at time 1, propagate, clone $x_{c_2}$ at time 2, propagate to the current state $x$ at time 3 (the exercise's $x_2$ is this current state). With $P = Q = R = 1$ the covariance of $(x, x_{c_1}, x_{c_2})$ is $\left[\begin{smallmatrix} 3 & 1 & 2 \\ 1 & 1 & 1 \\ 2 & 1 & 2 \end{smallmatrix}\right]$. The two displacement measurements are $z_a = x_{c_2} - x_{c_1} + n_a$ and $z_b = x - x_{c_2} + n_b$, with independent noises. Processing them one after the other (in either order), or stacked, gives posterior variances $(2, 1, 1.5)$. The alternative pair is anchored at the first clone:

$$z'_1 = z_a + z_b = x - x_{c_1} + (n_a + n_b), \qquad z'_2 = z_a = x_{c_2} - x_{c_1} + n_a,$$

i.e. $z' = Tz$ with $T = \left[\begin{smallmatrix} 1 & 1 \\ 1 & 0 \end{smallmatrix}\right]$. The two share $n_a$, so their noise covariance is $TRT^{\mathsf{T}} = \left[\begin{smallmatrix} 2 & 1 \\ 1 & 1 \end{smallmatrix}\right]$. An invertible $T$ changes neither $H^{\mathsf{T}}R^{-1}H$ nor $H^{\mathsf{T}}R^{-1}z$, so the update with $(TH, TRT^{\mathsf{T}})$ is identical: posterior variances $(2, 1, 1.5)$ again. To process the anchored pair sequentially, decorrelate first: after $z'_1$, use $z'_2 - \frac{1}{2}z'_1$, with Jacobian $(-\frac{1}{2}, -\frac{1}{2}, 1)$ and variance $\frac{1}{2}$. Both kinds of correlation must be kept, those between the states (the clones) and those between the noises. Dropping the noise correlation gives variances $(1.86, 1, 1.43)$: overconfident, because $n_a$ is counted twice.

**25.3** With column-major storage, the active $n \times n$ block in a buffer of leading dimension $N_{\max}$, and the block to delete at offset $o$:

(a) for $j = o, \ldots, n-7$ in ascending order, copy column $j+6$ into column $j$ (rows $0, \ldots, n-1$);

(b) for $i = o, \ldots, n-7$ in ascending order, copy row $i+6$ into row $i$ (columns $0, \ldots, n-7$);

(c) set $n \leftarrow n - 6$ (and optionally zero the vacated strip, which makes stale reads visible).

Each copy reads an element before anything overwrites it, because sources always lie after their destinations. Copying one whole row or column into a *different* one never overlaps, so Eigen row and column assignments are safe. Assigning a block

to an overlapping block of the same matrix is not. A simulation of exactly this element order reproduces the reference bit for bit, while the descending order corrupts it. Test it against a reference built by index selection (`P(idx, idx)` into a dynamic matrix, which may allocate in the test): random SPD $75 \times 75$ matrices, deleting the first clone (offset 15), a middle one and the last one (offset 69). Require exact equality and symmetry. Run the deletion inside the allocation guard with Eigen's allocations forbidden (`EIGEN_RUNTIME_NO_MALLOC`), since the guard alone cannot see them (Chapter 30).

**25.4** With 50 features of 6 observations, $d = 50 \cdot (2 \cdot 6 - 3) = 450$ rows. Counting $HP$, $HPH^\mathsf{T}$, the Cholesky factorization of $S$, the gain solve and the Joseph update in the leading-order flop counts, and the QR compression of the $d \times (n+1)$ matrix $[H\ r]$ to $n$ rows:

| $N_{\max}$ | $n = 15 + 6N_{\max}$ | without QR | with QR | saving |
|---|---|---|---|---|
| 10 | 75 | 108 Mflop | 11 Mflop | ×10 |
| 20 | 135 | 199 Mflop | 50 Mflop | ×4 |
| 30 | 195 | 321 Mflop | 136 Mflop | ×2.4 |

The per-feature projections cost only 0.3 Mflop in total. Without compression, the $d^3/3$ factorization and the $d^2 n$ products dominate. With it, everything is $O(n^3)$ after an $O(dn^2)$ QR, and the saving shrinks as $n$ approaches $d$. Note also the $n^3$ growth: tripling the window costs more than ten times as much.

Chapter 26

# The MSCKF Visual Update

**In this chapter**

- Build the linearized measurement model of a feature track over the clones that observed it.
- Eliminate the feature by left-nullspace projection, and prove that no information about the poses is lost.
- Compute the projection efficiently with Householder reflections.
- Gate features, stack them, compress the stack with QR, and apply the update to the IMU state and all clones.

## 26.1 A feature track

A feature $j$ has been observed at the clones $\mathcal{S}_j = \{i_1, \dots, i_M\}$, with undistorted normalized observations $z_{j,i}$. The update is triggered when the track is lost or when its oldest observation's clone is about to be marginalized, and requires $M \geq 3$ (AGENTS.md F5). The first step is to estimate the feature position $\hat{p}_f$ in the world frame by triangulation from the clone camera poses

$$\hat{R}_{wc_i} = \hat{R}_{wb_i} R_{bc}, \qquad \hat{p}_{wc_i} = \hat{p}_{wb_i} + \hat{R}_{wb_i} p_{bc}, \tag{26.1}$$

using the linear initialization and Gauss–Newton refinement of Section 23.6, with the positive-depth, parallax and reprojection checks. Features that fail are discarded.

## 26.2 Residuals and Jacobians

For each observation, the predicted measurement uses the clone estimate and the triangulated point,

$$\hat{p}_{c_i} = R_{bc}^{\mathsf{T}} \big( \hat{R}_{wb_i}^{\mathsf{T}} (\hat{p}_f - \hat{p}_{wb_i}) - p_{bc} \big), \qquad r_{j,i} = z_{j,i} - \pi(\hat{p}_{c_i}). \tag{26.2}$$

Linearizing with respect to the error state $\delta x$ (IMU and clones) and the feature position error $\delta p_f = p_f - \hat{p}_f$,

$$r_{j,i} \approx H_{x,ji}\, \delta x + H_{f,ji}\, \delta p_f + n_{j,i}, \qquad n_{j,i} \sim \mathcal{N}(0, \sigma_{uv}^2 I_2). \tag{26.3}$$

The structure of these Jacobians follows from the chain rule

$$H_{x,ji} = \frac{\partial \pi}{\partial p_c}\Big|_{\hat{p}_{c_i}} \frac{\partial p_{c_i}}{\partial \delta x}, \qquad H_{f,ji} = \frac{\partial \pi}{\partial p_c}\Big|_{\hat{p}_{c_i}} \frac{\partial p_{c_i}}{\partial p_f}, \tag{26.4}$$

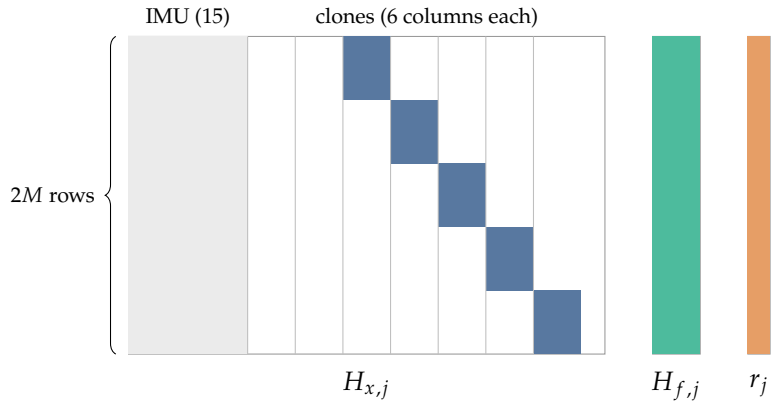



**Figure 26.1:** Sparsity of the stacked feature Jacobian for a feature seen by five consecutive clones. Each pair of rows depends on one clone; the IMU columns are zero. $H_{f,j}$ is dense.

with the projection Jacobian of Proposition 20.2. The observation at clone $i$ depends only on that clone's pose, so $H_{x,ji}$ is zero except in the six columns of $(\delta p_i, \delta\theta_i)$. In particular it is zero in all IMU columns.

**Derivation exercise (project Jacobian): the visual measurement Jacobians $H_{x,ji}$ and $H_{f,ji}$**

With $p_{c_i} = R_{bc}^{\mathsf{T}}\big(R_{wb_i}^{\mathsf{T}}(p_f - p_{wb_i}) - p_{bc}\big)$, the local perturbation $R_{wb_i} = \hat{R}_{wb_i}\,\mathrm{Exp}(\delta\theta_i)$ and $p_{wb_i} = \hat{p}_{wb_i} + \delta p_i$:

1. Derive $\partial p_{c_i}/\partial\delta\theta_i$ with the inverse-action row of Table 8.1. Be careful about which vector the rotation acts on.
2. Derive $\partial p_{c_i}/\partial\delta p_i$ and $\partial p_{c_i}/\partial p_f$. How are they related, and why does that make physical sense?
3. Multiply by $\partial\pi/\partial p_c$ and place the blocks in the frozen column layout. State the sparsity pattern of the stacked $H_{x,j}$.

**Check:** Milestone 10b requires finite-difference tests of the projection Jacobians with respect to the clone $\delta p$, the clone $\delta\theta$ and $p_f$, at a non-trivial clone pose with non-trivial extrinsics.

*Worked solution: Appendix E.5 (page 352).*

Stacking the $M$ observations of feature $j$,

$$r_j \approx H_{x,j}\,\delta x + H_{f,j}\,\delta p_f + n_j, \qquad r_j, n_j \in \mathbb{R}^{2M}, \quad H_{x,j} \in \mathbb{R}^{2M\times(15+6N)}, \quad H_{f,j} \in \mathbb{R}^{2M\times 3}. \tag{26.5}$$

## 26.3 The problem with the feature

Equation (26.5) cannot be used directly in an update. The feature error $\delta p_f$ is not part of the state, so there is nothing to correct. Worse, $\hat{p}_f$ was computed from the same measurements $z_{j,i}$ and the same clone estimates, so its error is correlated with both $n_j$ and $\delta x$ in a way the filter's covariance does not describe. Treating $\hat{p}_f$ as known would double count the measurements. EKF-SLAM resolves this by putting $p_f$ in the state. The MSCKF eliminates it.

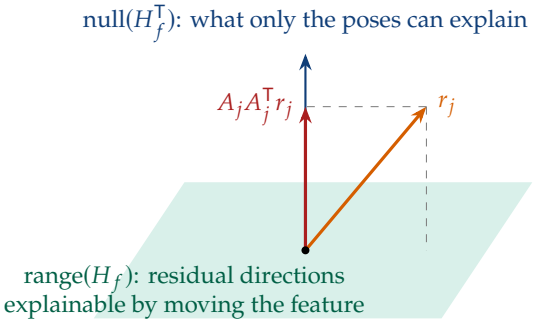



**Figure 26.2:** Geometry of the nullspace projection. Residual components inside the column space of $H_f$ can be absorbed by an adjustment of the unknown feature position, so they say nothing about the poses. The component orthogonal to it, in the left nullspace, cannot be explained by any feature position and must be explained by the poses.

## 26.4 Left-nullspace projection

$H_{f,j}$ is a tall $2M \times 3$ matrix. If the feature is well triangulated it has full column rank 3, and its left nullspace has dimension $2M - 3$ (Section 2.5.4). Let $A_j \in \mathbb{R}^{2M\times(2M-3)}$ have orthonormal columns spanning null($H_{f,j}^\top$), so that $A_j^\top H_{f,j} = 0$ and $A_j^\top A_j = I$. Multiplying (26.5) by $A_j^\top$,

$$r_{o,j} := A_j^\top r_j \approx \underbrace{A_j^\top H_{x,j}}_{H_{o,j}}\,\delta x + \underbrace{A_j^\top H_{f,j}}_{=0}\,\delta p_f + A_j^\top n_j = H_{o,j}\,\delta x + n_{o,j}. \tag{26.6}$$

The feature has disappeared, and the projected noise is still white with the same variance: $\mathrm{Cov}(n_{o,j}) = \sigma_{uv}^2 A_j^\top A_j = \sigma_{uv}^2 I_{2M-3}$. Equation (26.6) is a standard EKF measurement of the state alone, of dimension $2M - 3$.

**Theorem 26.1** (Nullspace projection loses no information)**.** *Suppose $\delta p_f$ has no prior information and $H_{f,j}$ has full column rank. Then the information about $\delta x$ in the projected measurement (26.6) equals the information about $\delta x$ in (26.5) after $\delta p_f$ is marginalized out:*

$$H_{o,j}^\top H_{o,j} = H_{x,j}^\top \Big(I - H_{f,j}(H_{f,j}^\top H_{f,j})^{-1} H_{f,j}^\top\Big) H_{x,j}, \tag{26.7}$$

*and likewise for the information vectors $H_{o,j}^\top r_{o,j}$. The two formulations therefore produce identical updates.*

*Proof.* The joint information matrix of $(\delta x, \delta p_f)$ contributed by (26.5) is $\sigma^{-2}\begin{bmatrix} H_x^\top H_x & H_x^\top H_f \\ H_f^\top H_x & H_f^\top H_f \end{bmatrix}$. Marginalizing $\delta p_f$ in information form is the Schur complement (Theorem 5.11), $\sigma^{-2}\big(H_x^\top H_x - H_x^\top H_f (H_f^\top H_f)^{-1} H_f^\top H_x\big)$, and by the projector identity (3.10), $I - H_f(H_f^\top H_f)^{-1}H_f^\top = AA^\top$. The same algebra applies to the information vector $\sigma^{-2}H_x^\top(I - H_f(H_f^\top H_f)^{-1}H_f^\top)r$. ∎

An equivalent way to see this: complete $A_j$ to an orthogonal matrix $Q = [Q_1 \;\; A_j]$. Multiplying by $Q^\top$ splits the equations into three that involve $\delta p_f$ (through the invertible $3 \times 3$ matrix

$Q_1^\top H_f$) and $2M-3$ that do not. Since $\delta p_f$ is free, the first three can always be satisfied by choosing $\delta p_f$, so they carry no information about $\delta x$. The rest carry all of it.

**Worked example: what survives the projection for two views**

Let two cameras with identity orientation observe a point straight ahead of the first, $p_f = (0, 0, Z)$, the second camera being displaced sideways by $b$. In camera coordinates the point is at $(0, 0, Z)$ and $(-b, 0, Z)$, and by Proposition 20.2 the feature Jacobian (the derivative of the four image coordinates with respect to $p_f$) is

$$H_f = \frac{1}{Z}\begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 1 & 0 & b/Z \\ 0 & 1 & 0 \end{bmatrix}.$$

A vector $a$ in its left nullspace must satisfy $a_1 + a_3 = 0$, $a_2 + a_4 = 0$ and $a_3 b/Z = 0$, so $a = (0, 1, 0, -1)/\sqrt{2}$. The projected residual is $r_o = (r_{1,y} - r_{2,y})/\sqrt{2}$: *the point must appear at the same height in both images*. That is the epipolar constraint for a sideways baseline, the condition that stereo rectification exploits. The two horizontal residuals are absorbed by the unknown lateral position and depth (through the disparity), and one vertical residual by the unknown height; only the difference of heights says anything about the cameras.

***Remark* 26.2** (how many observations)**.** Two observations ($M = 2$) leave $2M-3 = 1$ constraint, the epipolar constraint between two clones, as the example shows. It is weak and sensitive to triangulation error, so the project requires $M \geq 3$ (AGENTS.md F5), which gives at least three constraints and a better-conditioned triangulation. If the triangulation is poor (low parallax), $H_{f,j}$ is close to rank-deficient, the projection is ill-defined, and the feature should have been rejected by the triangulation checks.

### 26.4.1 Computing the projection

$A_j$ is never formed. By Proposition 3.4, the last $2M-3$ columns of the $Q$ factor of a full QR decomposition of $H_{f,j}$ span its left nullspace. Householder QR of the $2M \times 3$ matrix $H_{f,j}$ uses exactly three reflections. Applying the same three reflections to $H_{x,j}$ and $r_j$, and keeping the last $2M-3$ rows of the results, gives $H_{o,j}$ and $r_{o,j}$ directly:

**Algorithm 6** Left-nullspace projection by Householder reflections

**Input:** $H_f \in \mathbb{R}^{m\times 3}$ ($m = 2M$), $H_x \in \mathbb{R}^{m\times k}$ (only the non-zero clone columns), $r \in \mathbb{R}^m$, stored side by side as $[H_f \mid H_x \mid r]$

1: **for** $c = 1, 2, 3$ **do**
2: $x \leftarrow$ entries $c, \ldots, m$ of column $c$ of $H_f$
3: $v \leftarrow x$; $v_1 \leftarrow v_1 + \operatorname{sign}(x_1)\|x\|$ ▷ Chapter 3
4: apply $I - 2vv^\top/(v^\top v)$ to rows $c, \ldots, m$ of every column of $[H_f \mid H_x \mid r]$
5: $H_o \leftarrow$ rows $4, \ldots, m$ of $H_x$; $r_o \leftarrow$ rows $4, \ldots, m$ of $r$ ▷ rows $4..m$ of $H_f$ are now zero

The cost is $O(M \cdot k)$ for $k$ columns, and only the $6M$ non-zero clone columns of $H_{x,j}$ need processing. Givens rotations achieve the same with finer control over sparsity and were

suggested in the original paper. Milestone 10b checks $\|A^\mathsf{T} H_f\| < 10^{-10}$ and the orthonormality of $A$ in a test, where forming $A$ explicitly is acceptable.

## 26.5 Gating, stacking and compression

**Per-feature gating.** Each projected residual is gated before it is accepted (AGENTS.md F5):

$$\gamma_j = r_{o,j}^\mathsf{T} \left(H_{o,j} P H_{o,j}^\mathsf{T} + \sigma_{uv}^2 I\right)^{-1} r_{o,j} < \chi^2_{0.95}(2M - 3). \tag{26.8}$$

This rejects tracks that passed the front end's checks but are inconsistent with the filter's current belief: tracks on moving objects, slowly drifting tracks, and features with wrong associations.

**Stacking.** The accepted features are stacked into one measurement,

$$r_o = H_o\, \delta x + n_o, \qquad r_o \in \mathbb{R}^d, \quad d = \sum_j (2M_j - 3), \tag{26.9}$$

with the number of rows capped at a compile-time maximum so that the stacked workspace is fixed-size. With 50 features of 6 observations each, $d = 450$, much larger than the state dimension $n = 75$.

**QR compression.** When $d > n$, the update can be made cheaper without approximation.

> **Proposition 26.3** (Measurement compression). *Let $H_o = Q_1 T_H$ be a thin QR decomposition, with $T_H \in \mathbb{R}^{n\times n}$ upper triangular, and define $r_n = Q_1^\mathsf{T} r_o$. Then the measurement $r_n = T_H\, \delta x + n_n$ with $n_n \sim \mathcal{N}(0, \sigma_{uv}^2 I_n)$ yields exactly the same update as $(r_o, H_o)$.*

*Proof.* The update depends on the measurement only through the information $H_o^\mathsf{T} H_o/\sigma^2$ and the information vector $H_o^\mathsf{T} r_o/\sigma^2$ (Equation (12.8)). Since $Q_1^\mathsf{T} Q_1 = I$, $T_H^\mathsf{T} T_H = H_o^\mathsf{T} Q_1 Q_1^\mathsf{T} H_o = H_o^\mathsf{T} H_o$ (as $Q_1 Q_1^\mathsf{T}$ projects onto range$(H_o)$, which contains the columns of $H_o$), and $T_H^\mathsf{T} r_n = H_o^\mathsf{T} Q_1 Q_1^\mathsf{T} r_o = H_o^\mathsf{T} r_o$. The discarded components $Q_2^\mathsf{T} r_o$ are pure noise, independent of $\delta x$. ∎

Compression reduces the innovation covariance from $d \times d$ to at most $n \times n$, and the Joseph update from $O(dn^2 + d^3)$ to $O(n^3)$ after an $O(dn^2)$ QR. Only the non-zero columns of $H_o$ (the clone columns) need to take part in the decomposition. Compression is optional in the project (AGENTS.md F5); it is worthwhile when $d \gg n$.

## 26.6 The update

The stacked (and possibly compressed) measurement is applied with the generic update of Chapter 18: $S = HPH^\mathsf{T} + \sigma_{uv}^2 I$, gain by Cholesky solve, Joseph form, then injection into the IMU state and *every* clone, normalization of every touched quaternion, and the reset with one $I - \frac{1}{2}[\delta\hat{\theta}_i]_\times$ block per attitude. Corrections to the clones are real: they improve the poses that future features will be triangulated from.

**Algorithm 7** MSCKF visual update

**Input:** filter state with clones, set of feature tracks ready for update

$d \leftarrow 0$
**for** each ready feature $j$ with $M_j \geq 3$ observations **do**
  triangulate $\hat{p}_f$ (linear + Gauss–Newton); **if** checks fail **then** discard, **continue**
  build $r_j$, $H_{x,j}$ (clone columns only), $H_{f,j}$
  apply Householder QR of $H_{f,j}$ to $[H_{x,j} \;\; r_j]$; keep rows $4 \ldots 2M_j \rightarrow H_{o,j}$, $r_{o,j}$
  **if** $\gamma_j < \chi^2_{0.95}(2M_j - 3)$ **and** $d + 2M_j - 3 \leq d_{max}$ **then**
    append $H_{o,j}$, $r_{o,j}$ to the stacked workspace; $d \leftarrow d + 2M_j - 3$
  **else**
    count the rejection
  mark the track's observations as consumed
**if** $d > 0$ **then**
  optionally compress with QR if $d > n$
  EKF update (Joseph), inject into IMU and all clones, normalize, reset with $G$

**Project link: Milestone 10b**

The exit criteria test every link of Algorithm 7: projection Jacobians by finite differences; triangulation exact on noise-free data and bounded under noise, rejecting negative-depth and low-parallax features; $\|A^\top H_f\| < 10^{-10}$ with orthonormal $A$; a full synthetic VIO run without divergence, with NEES reported (yaw inconsistency expected and documented); zero allocations with fixed-max workspaces; and MH_01 end to end with ATE reported.

**Key takeaways**

- Each observation depends on one clone; $H_{x,j}$ is zero in the IMU columns and dense in the feature's $H_{f,j}$.
- Projecting onto the left nullspace of $H_{f,j}$ removes the feature, keeps the noise white, and loses no information about the poses (it equals Schur-complement marginalization).
- Three Householder reflections applied to $[H_{x,j} \; r_j]$ compute the projection without forming $A_j$.
- Gate each feature with $\chi^2_{0.95}(2M-3)$, stack, compress with QR if $d > n$, and update IMU and clones together.

## Exercises

**26.1** Verify Theorem 26.1 numerically: compare the posterior covariance of $\delta x$ from the projected update with that from an update of the augmented state $(\delta x, \delta p_f)$ with a very large prior on $\delta p_f$.

**26.2** Show that the three discarded rows $Q_1^\top r_j$ determine the correction to $\hat{p}_f$ given $\delta x$. How would you recover an updated feature estimate if you wanted one?

**26.3** For $M = 2$, compute $A_j$ explicitly and interpret the single projected residual geometri-

cally.

**26.4** Implement the Householder application of Algorithm 7 and compare its cost and result with forming $A_j$ from a full QR.

**26.5** Prove that the projected noise vectors $n_{o,j}$ of two different features are independent if their raw noises are, so that stacking them with a block-diagonal (here scalar) noise covariance is correct. Why are the projected *residuals* themselves correlated?

## Solutions to the exercises

**26.1** Take random $H_x \in \mathbb{R}^{8\times 39}$, $H_f \in \mathbb{R}^{8\times 3}$, an SPD prior $P$ and $\sigma^2 = 0.3$. Update once with $(A^\mathsf{T} r, A^\mathsf{T} H_x, \sigma^2 I_5)$, and once the augmented state $(\delta x, \delta p_f)$ with prior blkdiag$(P, \lambda I_3)$ and $(r, [H_x\ H_f], \sigma^2 I_8)$. The $\delta x$ blocks of the two posteriors differ by

| $\lambda$ | $10^2$ | $10^4$ | $10^6$ | $10^8$ |
|---|---|---|---|---|
| $\max\lvert\Delta P\rvert$ | $5\times10^{-2}$ | $6\times10^{-4}$ | $6\times10^{-6}$ | $6\times10^{-8}$ |
| $\max\lvert\Delta\delta\hat{x}\rvert$ | $10^{-2}$ | $10^{-4}$ | $10^{-6}$ | $10^{-8}$ |

The difference falls like $1/\lambda$, so in the limit of no prior the two updates coincide, as Theorem 26.1 states. Beyond $\lambda \approx 10^{10}$ the augmented computation itself loses accuracy, through cancellation in $\lambda - \lambda(\cdots)$. This is one more reason to eliminate the feature algebraically.

**26.2** With $Q = [Q_1\ \ A]$ from the QR decomposition of $H_f$, the first three rotated equations are

$$Q_1^\mathsf{T} r = Q_1^\mathsf{T} H_x\, \delta x + R_f\, \delta p_f + Q_1^\mathsf{T} n, \qquad R_f = Q_1^\mathsf{T} H_f \text{ (upper triangular, invertible).}$$

For any $\delta x$, they can be satisfied exactly by one $\delta p_f$, which is why they carry no information about $\delta x$. Once the update has produced $\delta\hat{x}$, they determine the feature correction:

$$\delta\hat{p}_f = R_f^{-1} Q_1^\mathsf{T}\big(r - H_x\, \delta\hat{x}\big), \qquad \hat{p}_f \leftarrow \hat{p}_f + \delta\hat{p}_f.$$

The noise $Q_1^\mathsf{T} n$ is independent of $A^\mathsf{T} n$, which drove the update, so the covariance follows directly: $P_{ff} = R_f^{-1}\big(Q_1^\mathsf{T} H_x P^+ H_x^\mathsf{T} Q_1 + \sigma^2 I\big) R_f^{-\mathsf{T}}$ and $P_{fx} = -R_f^{-1} Q_1^\mathsf{T} H_x P^+$. Numerically, these agree with the augmented update of Exercise 1 to within $10^{-7}$ (Joseph form). This is the back-substitution step of a Schur-complement solver (Section 10.8). It is what a hybrid filter would do to promote a long-lived feature into the state as a landmark, with exactly these covariance blocks.

**26.3** For two views, $H_f$ is $4\times 3$ of rank 3 and its left nullspace is one-dimensional, so $A_j$ is a single unit vector. It can be found without the Jacobian. Let $\epsilon(z_1, z_2) = \bar{x}_2^\mathsf{T} E \bar{x}_1$ be the epipolar function of the two clones' estimated relative pose. For any feature position, its two predicted images satisfy the epipolar constraint, so $\epsilon\big(\pi_1(p_f), \pi_2(p_f)\big) \equiv 0$. Differentiating with respect to $p_f$ gives $g^\mathsf{T} H_f = 0$ with

$$g = \frac{\partial\epsilon}{\partial(z_1, z_2)} = \big((E^\mathsf{T}\bar{x}_2)_1,\ (E^\mathsf{T}\bar{x}_2)_2,\ (E\bar{x}_1)_1,\ (E\bar{x}_1)_2\big), \qquad A_j = g/\|g\|.$$

The projected residual $r_o = g^\mathsf{T} r/\|g\|$ is the first-order change of the epipolar residual divided by the norm of its gradient, which is the signed Sampson distance of Chapter 23. It measures how far the two observations are from satisfying the coplanarity of the two rays and the baseline, and nothing else. Errors along the epipolar lines are absorbed by the feature position. For the worked example ($R = I$, $t = (-b, 0, 0)$, $\bar{x}_1 = (0, 0, 1)$), $g = (0, -b, 0, b)$, which gives $A_j = (0, 1, 0, -1)/\sqrt{2}$ up to sign, as found there. A numerical check at a random configuration, with $H_f$ obtained by finite differences, gives $|g^\mathsf{T} H_f|/(\|g\|\|H_f\|) = 6\times10^{-11}$.

**26.4** Applying the three reflections of Algorithm 6 to $[H_f \mid H_x \mid r]$ with $m = 2M$ rows and $k = 6M$ clone columns costs about $4(k+1)(3m-3)$ flops. Forming $A$ from a full QR and multiplying costs about $12m^2$ to build $Q$ plus $2(m-3)m(k+1)$ for $A^\mathsf{T}[H_x\ r]$:

| | $M = 3$ | $M = 6$ | $M = 10$ |
|---|---|---|---|
| Householder in place | 1.1 kflop | 4.9 kflop | 14 kflop |
| explicit $A$ | 1.1 kflop | 9.7 kflop | 46 kflop |

The reflections cost $O(M^2)$ against $O(M^3)$, and they need no $m \times m$ workspace. The results agree to $10^{-15}$ up to the sign of each row. A different orthonormal basis of the nullspace (from an SVD, say) gives a different $H_o$, but the same $H_o^\mathsf{T} H_o$, the same $H_o^\mathsf{T} r_o$ and the same gating statistic (checked to all digits), because two bases differ by an orthogonal $U$: $A' = AU$.

**26.5** For features $j \neq k$, $\mathrm{Cov}(n_{o,j}, n_{o,k}) = A_j^\mathsf{T} \mathrm{Cov}(n_j, n_k) A_k = 0$ when the raw noises are independent, and $\mathrm{Cov}(n_{o,j}) = \sigma^2 A_j^\mathsf{T} A_j = \sigma^2 I$. The projected noises are jointly Gaussian (linear functions of Gaussian noise) and uncorrelated, hence independent, so the stacked noise covariance is $\sigma^2 I_d$. The projected *residuals* are correlated nevertheless:

$$\mathrm{Cov}(r_{o,j}, r_{o,k}) = H_{o,j} P H_{o,k}^\mathsf{T} \neq 0,$$

because every residual depends on the same uncertain state, here on clones that the two features share. These are the off-diagonal blocks of $S = H_o P H_o^\mathsf{T} + \sigma^2 I$, and the stacked update accounts for them exactly. The measurement-noise matrix must not contain them: they are already in $P$, and adding them to $R$ would count the state uncertainty twice.

Chapter 27

# A Complete MSCKF in the Plane

**In this chapter**

- Build a complete MSCKF for a robot moving in a plane, small enough that every Jacobian can be derived by hand in a few lines.
- Meet every ingredient of the full filter in its simplest form: nominal and error state, propagation, cloning, triangulation, nullspace projection, gating, update and marginalization.
- See, in a three-view example, what the projected residual actually measures.
- Run the filter in simulation and check its accuracy and consistency.
- Identify the unobservable directions, and list exactly what changes in three dimensions.

The previous three chapters described the MSCKF in full generality. This chapter does something different: it builds the whole filter for a toy problem in which nothing is hidden. A robot drives on a plane, measures its speed and turn rate, and carries a camera that sees the world as a line of pixels. Every equation is derived, every Jacobian is checked against geometric intuition, and the result is run in a simulation whose code accompanies these notes (`scripts/planar_sims.py`, about two hundred lines of Python). If the general chapters felt abstract, work through this one with a pencil; afterwards, the three-dimensional filter differs only in details that Section 27.10 lists one by one.

**Project link: what this chapter does and does not give away**

The planar Jacobians below are derived in full because the planar system is not the project's system. The three-dimensional Jacobians ($F_c$, $G_c$, the pose and camera $H$, the cloning $J$) differ precisely where the difficulty lies: rotations that do not commute, the frozen local perturbation, gravity, biases, and the reset Jacobian. Deriving them remains your task (AGENTS.md Guardrail 4). Use this chapter as the template: the same procedure (perturb, expand to first order, read off the coefficient), and the same finite-difference checks.

## 27.1 The planar world

### 27.1.1 Frames and pose

The world frame $W$ is a fixed plane with axes $x_w, y_w$. The robot carries a body frame $B$ with $x_b$ pointing forward and $y_b$ to the left. Its pose is the position $p \in \mathbb{R}^2$ of the body origin in $W$

and the heading $\psi$, the angle from $x_w$ to $x_b$. The rotation

$$R(\psi) = \begin{bmatrix} \cos\psi & -\sin\psi \\ \sin\psi & \cos\psi \end{bmatrix} \tag{27.1}$$

maps body-frame vectors to the world frame, $v_w = R(\psi)\, v_b$: it plays the role of $R_{wb}$ (AGENTS.md C1). A point $p_f$ given in $W$ has body coordinates $p_b = R(\psi)^{\mathsf{T}}(p_f - p)$.

### 27.1.2 The planar skew matrix

The matrix

$$\Omega = \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix} \tag{27.2}$$

rotates a vector by $+90°$: $\Omega\,(a_1, a_2) = (-a_2, a_1)$. It is the planar version of the skew matrix: for a rotation about the $z$-axis, $[\omega e_z]_\times$ acts on the $xy$-plane exactly as $\omega\,\Omega$ (compare Section 8.2).

**Lemma 27.1** (Properties of $\Omega$). *For all $\psi$, $\delta$ and $a \in \mathbb{R}^2$:*

1. $\Omega^{\mathsf{T}} = -\Omega$, $\Omega^2 = -I$, *and* $a^{\mathsf{T}}\Omega a = 0$;
2. $R(\psi) = \cos\psi\, I + \sin\psi\, \Omega = \exp(\psi\,\Omega)$;
3. $R(\psi)\,\Omega = \Omega\, R(\psi)$ *and* $R(\psi)^{\mathsf{T}}\Omega = \Omega R(\psi)^{\mathsf{T}}$;
4. $\dfrac{\mathrm{d}}{\mathrm{d}\psi} R(\psi) = \Omega R(\psi)$, *and* $R(\psi + \delta) = R(\psi)\big(I + \delta\,\Omega\big) + O(\delta^2)$;
5. $R(\psi + \delta)^{\mathsf{T}} = (I - \delta\,\Omega)\, R(\psi)^{\mathsf{T}} + O(\delta^2)$.

*Proof.* (1) Direct multiplication; $a^{\mathsf{T}}\Omega a = -a_1 a_2 + a_2 a_1 = 0$. (2) Read off the entries of $\cos\psi\, I + \sin\psi\,\Omega$. For the exponential, $\Omega^2 = -I$ gives $\Omega^{2k} = (-1)^k I$ and $\Omega^{2k+1} = (-1)^k \Omega$, so the series splits into the cosine and sine series. (3) By (2), $R(\psi)$ is a combination of $I$ and $\Omega$, and both commute with $\Omega$; transpose for the second identity. (4) Differentiate (2): $-\sin\psi\, I + \cos\psi\,\Omega = \Omega(\cos\psi\, I + \sin\psi\,\Omega)$, using $\Omega^2 = -I$. Then $R(\psi + \delta) = R(\psi)R(\delta)$ and $R(\delta) = I + \delta\,\Omega + O(\delta^2)$ by (2). (5) Transpose (4) and use $\Omega^{\mathsf{T}} = -\Omega$. ∎

Property (3) is the reason the plane is easy: rotations commute with each other and with $\Omega$, so $R(\hat{\psi})R(\delta) = R(\delta)R(\hat{\psi})$ and a heading error can be added on either side. In three dimensions neither is true, and the frozen local perturbation of AGENTS.md C4 is a real choice with real consequences.

## 27.2 Sensors

### 27.2.1 Odometry

Wheel odometry plays the part of the IMU. It measures the forward speed $v$ and the turn rate $\omega$ in the body frame, with white noise:

$$v_m = v + n_v, \qquad \omega_m = \omega + n_\omega, \qquad \mathbb{E}[n_v(t)n_v(s)] = \sigma_v^2\,\delta(t-s), \quad \mathbb{E}[n_\omega(t)n_\omega(s)] = \sigma_\omega^2\,\delta(t-s). \tag{27.3}$$

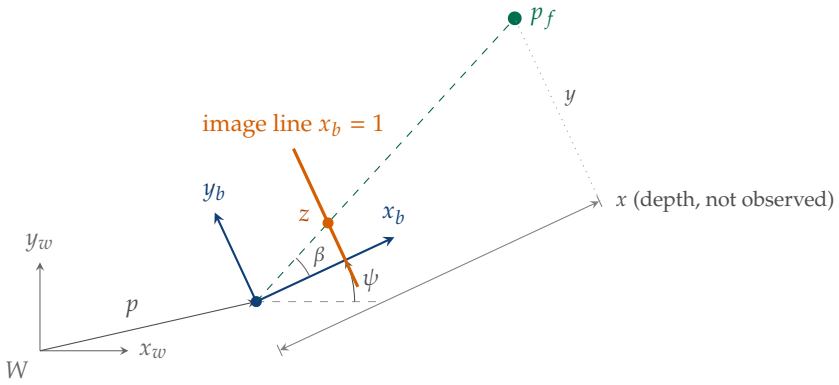



**Figure 27.1:** The planar robot and its one-dimensional camera. The feature $p_f$ has body coordinates $(x, y)$; the camera reports where the ray to it crosses the image line $x_b = 1$, the normalized coordinate $z = y/x = \tan\beta$. Moving the feature along the ray does not change $z$.

As for the IMU (Section 6.3), $\sigma_v$ and $\sigma_\omega$ are continuous-time noise densities, in $\mathrm{m/s}/\sqrt{\mathrm{Hz}}$ and $\mathrm{rad/s}/\sqrt{\mathrm{Hz}}$; a sample at period $\Delta t$ has standard deviation $\sigma/\sqrt{\Delta t}$. The robot does not slip sideways, so the kinematics are

$$\dot{p} = R(\psi)\, e_1\, v, \qquad \dot{\psi} = \omega, \qquad e_1 = (1, 0). \tag{27.4}$$

There are no biases and no gravity. Both appear in the exercises.

### 27.2.2 A one-dimensional camera

The camera sits at the body origin and looks along $x_b$. A planar pinhole camera has a one-dimensional image: the point $p_b = (x, y)$ in front of the camera ($x > 0$) is projected onto the *image line* $x = 1$ at the normalized coordinate

$$z = \pi(p_b) + n_z = \frac{y}{x} + n_z, \qquad n_z \sim \mathcal{N}(0, \sigma_z^2). \tag{27.5}$$

This is the planar analog of the normalized image coordinates of Chapter 20: a real 1D sensor with focal length $f$ (in pixels) and principal point $c$ would report $u = fz + c$, so a pixel noise $\sigma_{px}$ corresponds to $\sigma_z = \sigma_{px}/f$. The camera measures only the *bearing* $\beta = \arctan z$ of the point; its range is invisible, exactly as depth is invisible to a monocular camera in space.

## 27.3 State, error state and propagation

### 27.3.1 The state

The filter state is the current robot pose followed by $N$ clones of past poses, taken at image times:

$$x = \left(p,\ \psi,\ \ p_1, \psi_1,\ \ldots,\ p_N, \psi_N\right) \in \mathbb{R}^{3+3N}. \tag{27.6}$$

Because planar rotations commute, the retraction is ordinary addition (wrapping angles to $(-\pi, \pi]$): $p = \hat{p} + \delta p$ and $\psi = \hat{\psi} + \delta\psi$, which is simultaneously the local and the global

perturbation, and $\delta x = (\delta p, \delta\psi, \delta p_1, \delta\psi_1, \dots)$. The state has no velocity block, since speed is measured directly rather than integrated from accelerations.

### 27.3.2 Nominal propagation

Between odometry samples the inputs are held constant. The nominal state is integrated with the midpoint rule for the heading,

$$\hat{p}_{k+1} = \hat{p}_k + R\big(\hat{\psi}_k + \tfrac{1}{2}\omega_m \Delta t\big)\, e_1\, v_m \Delta t, \qquad \hat{\psi}_{k+1} = \hat{\psi}_k + \omega_m \Delta t, \tag{27.7}$$

which is the exact solution for an arc travelled at constant speed and turn rate, up to the factor $\sin(\omega\Delta t/2)/(\omega\Delta t/2) = 1 - O(\Delta t^2)$ on its length. Clones do not move.

### 27.3.3 Error dynamics

**Proposition 27.2** (Planar error dynamics). *To first order in the errors and the noise, the robot error obeys $\dot{\delta x}_R = F_c\, \delta x_R + G_c\, n$ with $\delta x_R = (\delta p, \delta\psi)$, $n = (n_v, n_\omega)$ and*

$$F_c = \begin{bmatrix} 0_{2\times 2} & \Omega\, R(\hat{\psi})\, e_1\, v_m \\ 0_{1\times 2} & 0 \end{bmatrix}, \qquad G_c = \begin{bmatrix} -R(\hat{\psi})\, e_1 & 0_{2\times 1} \\ 0 & -1 \end{bmatrix}. \tag{27.8}$$

*The top-right block equals $\Omega\,\dot{\hat{p}}$: a heading error $\delta\psi$ makes the position error grow perpendicular to the direction of travel.*

*Proof.* Write the true quantities as nominal plus error, $\psi = \hat{\psi} + \delta\psi$, and the true inputs as measured minus noise, $v = v_m - n_v$, $\omega = \omega_m - n_\omega$. For the heading, $\dot{\delta\psi} = \dot{\psi} - \dot{\hat{\psi}} = (\omega_m - n_\omega) - \omega_m = -n_\omega$. For the position, by Lemma 27.1(4),

$$\begin{aligned} \dot{p} &= R(\hat{\psi} + \delta\psi)\, e_1\, (v_m - n_v) = R(\hat{\psi})(I + \delta\psi\, \Omega)\, e_1\, (v_m - n_v) + O(\delta\psi^2) \\ &= R(\hat{\psi}) e_1 v_m + \delta\psi\, R(\hat{\psi})\Omega e_1\, v_m - R(\hat{\psi}) e_1\, n_v + \dots, \end{aligned}$$

dropping the product $\delta\psi\, n_v$. Subtracting $\dot{\hat{p}} = R(\hat{\psi}) e_1 v_m$ and using $R\Omega = \Omega R$ gives $\dot{\delta p} = \Omega R(\hat{\psi}) e_1 v_m\, \delta\psi - R(\hat{\psi}) e_1\, n_v$, which is the first block row. ∎

Discretization follows Chapter 11 exactly: $\Phi \approx I + F_c \Delta t$, and $Q_d \approx G_c Q_c G_c^{\mathsf{T}} \Delta t$ with $Q_c = \operatorname{diag}(\sigma_v^2, \sigma_\omega^2)$. The covariance is propagated block by block, with static clones:

$$P_{RR} \leftarrow \Phi P_{RR} \Phi^{\mathsf{T}} + Q_d, \qquad P_{RC} \leftarrow \Phi P_{RC}, \qquad P_{CC} \text{ unchanged}, \tag{27.9}$$

followed by symmetrization.

For the observability analysis we also need the transition matrix of the discrete integrator (27.7) itself, without the $O(\Delta t^2)$ truncation of $I + F_c \Delta t$.

**Proposition 27.3** (Exact discrete error transition). *Linearizing (27.7) in the errors gives $\delta p_{k+1} = \delta p_k + \Omega\,(\hat{p}_{k+1} - \hat{p}_k)\, \delta\psi_k + (\text{noise})$ and $\delta\psi_{k+1} = \delta\psi_k + (\text{noise})$, that is*

$$\Phi_k = \begin{bmatrix} I_2 & \Omega\,(\hat{p}_{k+1} - \hat{p}_k) \\ 0 & 1 \end{bmatrix}. \tag{27.10}$$

*Proof.* The true state obeys the same recursion with the true heading and inputs. A heading error $\delta\psi_k$ rotates the step $s = R(\hat{\psi}_k + \frac{1}{2}\omega_m\Delta t)e_1 v_m\Delta t$ into $R(\delta\psi_k)s \approx s + \delta\psi_k\,\Omega s$, and $s = \hat{p}_{k+1} - \hat{p}_k$. ∎

The transition depends on the estimates only through the displacement $\hat{p}_{k+1} - \hat{p}_k$. Over many steps the products of such matrices telescope, $\Phi_{k-1}\cdots\Phi_0 = \begin{bmatrix} I & \Omega(\hat{p}_k - \hat{p}_0) \\ 0 & 1 \end{bmatrix}$, provided each displacement is computed from *the same* estimates; Chapter 29 shows what happens when it is not.

## 27.4 Cloning and marginalization

At an image time the robot pose is copied into a new clone. The clone is an exact copy, so its error is the robot's error: $\delta p_{N+1} = \delta p$, $\delta\psi_{N+1} = \delta\psi$. With the robot block first, Proposition 25.1 gives

$$P \leftarrow JPJ^{\mathsf{T}}, \qquad J = \begin{bmatrix} I_{3+3N} \\ \begin{bmatrix} I_3 & 0_{3\times 3N} \end{bmatrix} \end{bmatrix}. \tag{27.11}$$

No linearization is involved: the copy is exact, which is why the new clone's covariance block and its cross-covariances equal the robot's *exactly*. When the window is full, the features that the oldest clone observed are processed first, then the clone is marginalized by deleting its three rows and columns, as in Chapter 25.

## 27.5 The feature measurement

### 27.5.1 Residual and Jacobians

Feature $j$, at the unknown position $p_f$, is observed by clone $i$ at the coordinate $z_i$. With the triangulated estimate $\hat{p}_f$ and the clone estimate $(\hat{p}_i, \hat{\psi}_i)$, the predicted body-frame point and the residual are

$$\hat{p}_{b,i} = R(\hat{\psi}_i)^{\mathsf{T}}(\hat{p}_f - \hat{p}_i) = (\hat{x}_i, \hat{y}_i), \qquad r_i = z_i - \hat{y}_i/\hat{x}_i. \tag{27.12}$$

**Proposition 27.4** (Planar camera Jacobians). *Let $\hat{z}_i = \hat{y}_i/\hat{x}_i$ and $J_\pi = \frac{1}{\hat{x}_i}\begin{bmatrix} -\hat{z}_i & 1 \end{bmatrix}$, the derivative of $y/x$ with respect to $(x, y)$. To first order, $r_i \approx H_{x,i}\,\delta x + H_{f,i}\,\delta p_f + n_{z,i}$, where $H_{x,i}$ is zero except in the three columns of clone $i$, and*

$$\frac{\partial r_i}{\partial \delta p_i} = -J_\pi R(\hat{\psi}_i)^{\mathsf{T}}, \qquad \frac{\partial r_i}{\partial \delta\psi_i} = -J_\pi\Omega\,\hat{p}_{b,i} = -\left(1 + \hat{z}_i^2\right), \qquad H_{f,i} = \frac{\partial r_i}{\partial \delta p_f} = J_\pi R(\hat{\psi}_i)^{\mathsf{T}}. \tag{27.13}$$

*Proof.* The measurement is $z_i = \pi(p_{b,i}) + n_{z,i}$ with $p_{b,i} = R(\psi_i)^{\mathsf{T}}(p_f - p_i)$, so $r_i = z_i - \pi(\hat{p}_{b,i}) \approx J_\pi\,(p_{b,i} - \hat{p}_{b,i}) + n_{z,i}$: we need the first-order change of $p_{b,i}$. Substituting $p_i = \hat{p}_i + \delta p_i$, $p_f = \hat{p}_f + \delta p_f$ and, by Lemma 27.1(5), $R(\hat{\psi}_i + \delta\psi_i)^{\mathsf{T}} \approx (I - \delta\psi_i\Omega)R(\hat{\psi}_i)^{\mathsf{T}}$,

$$p_{b,i} \approx (I - \delta\psi_i\Omega)\,R(\hat{\psi}_i)^{\mathsf{T}}(\hat{p}_f - \hat{p}_i + \delta p_f - \delta p_i) \approx \hat{p}_{b,i} - \delta\psi_i\,\Omega\,\hat{p}_{b,i} + R(\hat{\psi}_i)^{\mathsf{T}}(\delta p_f - \delta p_i).$$

Multiplying by $J_\pi$ gives the three Jacobians. For the heading term, $J_\pi \Omega \hat{p}_{b,i} = \frac{1}{\hat{x}} \begin{bmatrix} -\hat{z} & 1 \end{bmatrix} \begin{bmatrix} -\hat{y} \\ \hat{x} \end{bmatrix} = \frac{\hat{z}\hat{y}+\hat{x}}{\hat{x}} = \hat{z}^2 + 1$, using $\hat{y} = \hat{z}\hat{x}$. ∎

Each block has a clear meaning.

- **Rotation** shifts every bearing by the same angle: turning the robot left by $\delta\psi$ decreases every bearing by $\delta\psi$, and since $z = \tan\beta$, $\mathrm{d}z = (1 + z^2)\,\mathrm{d}\beta$. The heading column does not depend on the depth at all. This is why a camera measures rotation so well, even from points at infinity.
- **Translation** enters through $J_\pi$, which carries the factor $1/\hat{x}$: moving the robot shifts near points a lot and far points hardly at all. This is *parallax*, the only way a camera senses translation.
- **The feature** enters with the opposite sign of the clone position: moving the feature by $\delta p_f$ looks, to this camera, exactly like moving the robot by $-\delta p_f$. Only the relative position $p_f - p_i$ matters.

**Implementation note: check the Jacobians numerically anyway**

Even a three-line derivation deserves a finite-difference check (Section 4.4). Perturb each clone coordinate and the feature by $\varepsilon = 10^{-6}$, recompute $\pi(R(\psi_i)^\mathsf{T}(p_f - p_i))$, and compare the difference quotients with (27.13); agreement to about $10^{-8}$ is expected. Flip the sign of the heading term and the check fails at once, which is the point.

### 27.5.2 Triangulation

To linearize we need $\hat{p}_f$. Observation $i$ says that $p_f$ lies on the ray from $\hat{p}_i$ in the direction $d_i = R(\hat{\psi}_i)\,(1, z_i)$, that is $p_f - \hat{p}_i = \lambda_i d_i$ for some depth $\lambda_i > 0$. The depth is eliminated with the normal $n_i = \Omega d_i$, which is perpendicular to the ray (Lemma 27.1(1)):

$$n_i^\mathsf{T}(p_f - \hat{p}_i) = 0, \qquad i = 1, \dots, M \qquad \Longrightarrow \qquad \underbrace{\begin{bmatrix} n_1^\mathsf{T} \\ \vdots \\ n_M^\mathsf{T} \end{bmatrix}}_{A} p_f = \underbrace{\begin{bmatrix} n_1^\mathsf{T}\hat{p}_1 \\ \vdots \\ n_M^\mathsf{T}\hat{p}_M \end{bmatrix}}_{b}. \tag{27.14}$$

Two non-parallel rays determine $p_f$, and more rays give an overdetermined system solved by least squares (Section 3.5). If the rays are nearly parallel (too little parallax), $A$ is ill-conditioned and the feature is rejected; the simulation rejects features with $\kappa(A) > 10^4$. The linear solution minimizes algebraic distances, not the measurement errors, so it is refined by a few Gauss–Newton iterations (Section 10.3) on $\sum_i (z_i - \pi(R(\hat{\psi}_i)^\mathsf{T}(p_f - \hat{p}_i)))^2$, whose Jacobian rows are exactly the $H_{f,i}$ of (27.13). Finally every depth $\hat{x}_i$ must be positive (in the simulation, at least 0.2 m): a point behind a camera is a failed triangulation, not a measurement.

## 27.6 Eliminating the feature

Stacking the $M$ observations of feature $j$ gives $r_j \approx H_{x,j}\,\delta x + H_{f,j}\,\delta p_f + n_j$ with $H_{f,j} \in \mathbb{R}^{M\times 2}$. If the rays are not parallel, $H_{f,j}$ has rank 2 and its left nullspace has dimension $M-2$: *a feature seen $M$ times gives $M-2$ constraints on the poses*. Two observations give none, because two rays in a plane always intersect, so any pair of bearings is consistent with some feature position. With $A_j$ an orthonormal basis of the left nullspace (computed by QR, Proposition 3.4),

$$r_{o,j} = A_j^\mathsf{T} r_j \approx A_j^\mathsf{T} H_{x,j}\,\delta x + A_j^\mathsf{T} n_j, \qquad \mathrm{Cov}(A_j^\mathsf{T} n_j) = \sigma_z^2 I_{M-2}, \tag{27.15}$$

exactly as in Chapter 26. For three observations the nullspace is a single vector, and in $\mathbb{R}^3$ there is a closed form for it.

**Proposition 27.5** (Three views). *If $M = 3$ and the columns $h_1, h_2 \in \mathbb{R}^3$ of $H_{f,j}$ are linearly independent, the left nullspace of $H_{f,j}$ is spanned by the cross product $a = h_1 \times h_2$.*

*Proof.* $a^\mathsf{T} h_1 = (h_1 \times h_2)\cdot h_1 = 0$ and likewise for $h_2$ (Section 2.3), and $a \neq 0$ because the columns are independent. The nullspace has dimension $3-2=1$, so $a$ spans it. ∎

**Worked example: what three views measure**

Let the robot face along $x_w$ ($\hat\psi_i = 0$) at the three positions $\hat p_1 = (0,-1)$, $\hat p_2 = (0,0)$, $\hat p_3 = (0,1)$, a sideways motion with two equal baselines, and let the feature be at $\hat p_f = (4,0)$. The body-frame points are $(4,1)$, $(4,0)$ and $(4,-1)$, so $\hat z = (\frac14, 0, -\frac14)$ and, by (27.13),

$$H_f = \begin{bmatrix} -\frac{1}{16} & \frac14 \\ 0 & \frac14 \\ \frac{1}{16} & \frac14 \end{bmatrix}, \qquad h_1 \times h_2 = \tfrac{1}{64}(-1,2,-1), \qquad a = \tfrac{1}{\sqrt6}(1,-2,1).$$

The projected residual is $r_o = (r_1 - 2r_2 + r_3)/\sqrt6$, a *second difference*. The reason is visible in the geometry: for cameras translating sideways at a fixed heading, $z_i = (y_f - y_i)/x_f$ is a linear function of the camera position $y_i$, whatever the feature. A feature can absorb any offset and any slope of the three residuals; only their curvature is left for the poses to explain.

The projected Jacobian is $H_o = a^\mathsf{T} H_x$, with clone blocks $(\delta p_x, \delta p_y, \delta\psi)$

$$H_o = \tfrac{1}{\sqrt6}\Big[\ \big(\tfrac{1}{16}, -\tfrac14, -\tfrac{17}{16}\big)\ \ (0, \tfrac12, 2)\ \ \big(-\tfrac{1}{16}, -\tfrac14, -\tfrac{17}{16}\big)\ \Big],$$

since the clone blocks of $H_x$ are $\big(\frac{1}{16}, -\frac14, -\frac{17}{16}\big)$, $\big(0, -\frac14, -1\big)$ and $\big(-\frac{1}{16}, -\frac14, -\frac{17}{16}\big)$. Now test what it can see by multiplying $H_o$ by a pose perturbation:

- *Translate all three clones* by the same $(\delta_x, \delta_y)$: $H_o\,\delta x = \frac{1}{\sqrt6}\big[\frac{1}{16} - \frac{1}{16}\big]\delta_x + \frac{1}{\sqrt6}\big[-\frac14 + \frac12 - \frac14\big]\delta_y = 0$. Invisible.
- *Rotate everything* about the origin by $\delta$: each clone moves by $\delta\,\Omega\hat p_i$, that is $(\delta, 0)$, $(0,0)$, $(-\delta, 0)$, and turns by $\delta$. The result is $\frac{\delta}{\sqrt6}\big[\frac{1}{16} - \frac{17}{16} + 2 + \frac{1}{16} - \frac{17}{16}\big] = 0$. Invisible.
- *Scale* the configuration about the origin: $\delta p_1 = (0, -s)$, $\delta p_3 = (0, s)$, $\delta p_2 = 0$, giving

**Algorithm 8** Planar MSCKF

**Input:** initial pose estimate and covariance, window size $N_{\max}$

**for** each odometry sample $(v_m, \omega_m)$ with period $\Delta t$ **do**
  propagate $P$ with $\Phi = I + F_c\Delta t$, $Q_d = G_c Q_c G_c^\mathsf{T}\Delta t$ (Proposition 27.2); clones static
  propagate the nominal pose with (27.7)
  **if** an image arrives at this time **then**
    collect tracks that ended (feature not seen in this image)
    **if** $N = N_{\max}$ **then** also collect tracks whose first observation is the oldest clone
    **for** each collected track with $M \geq 3$ **do**
      triangulate (27.14) + Gauss–Newton; reject on parallax or negative depth
      build $r_j, H_{x,j}, H_{f,j}$ with (27.13); project onto the left nullspace of $H_{f,j}$
      gate with $\chi^2_{0.95}(M-2)$; keep or count the rejection
    stack the survivors; EKF update (Joseph); inject into the robot and all clones
    **if** $N = N_{\max}$ **then** marginalize the oldest clone
    clone the current pose; append this image's observations to their tracks

$\frac{s}{\sqrt{6}}\left[\frac{1}{4} - \frac{1}{4}\right] = 0$. Invisible: a camera cannot measure scale.

- *Move only the middle clone* sideways by $\delta_y$: $H_o\,\delta x = \delta_y/(2\sqrt{6}) \neq 0$. Visible: the camera measures the *ratio* of the two baselines.
- *Turn only the middle clone* by $\delta$: $H_o\,\delta x = 2\delta/\sqrt{6} \neq 0$. Visible: relative headings are measured directly.

This small example contains the whole story of monocular visual odometry: relative rotations and the shape of the trajectory are observed, while the global position, the global heading and the scale are not. In the filter, the odometry speed supplies the scale, and nothing supplies the global pose.

**Gating, stacking and the update.** Each projected residual is gated with $\gamma_j = r_{o,j}^\mathsf{T}(H_{o,j}PH_{o,j}^\mathsf{T} + \sigma_z^2 I)^{-1} r_{o,j} < \chi^2_{0.95}(M-2)$, the survivors are stacked into one measurement, and the update is the generic one of Chapter 18: $S = HPH^\mathsf{T} + \sigma_z^2 I$, the gain by a linear solve, the Joseph form, symmetrization. Injection adds the correction to the robot and to every clone, $\hat{p}_i \leftarrow \hat{p}_i + \delta\hat{p}_i$, $\hat{\psi}_i \leftarrow \hat{\psi}_i + \delta\hat{\psi}_i$ (wrapped). There is no reset Jacobian: after injection the new error is $\psi - (\hat{\psi} + \delta\hat{\psi}) = \delta\psi - \delta\hat{\psi}$, whose derivative with respect to $\delta\psi$ is exactly 1. In three dimensions the corresponding derivative is $I - \frac{1}{2}[\delta\hat{\theta}]_\times$ (Section 14.5), because rotations do not commute.

## 27.7 The complete filter

Algorithm 8 collects the steps; it is the full MSCKF of Chapter 28 with the planar models substituted.

The heart of the filter, the per-feature residual, is short enough to show in full. It mirrors (27.13) line by line; `OM` is $\Omega$ and `rot(psi)` is $R(\psi)$.

```
def feature_residual(self, obs):              # obs: list of (clone id, z)
    pf = self.triangulate(obs)                # linear + Gauss-Newton, with checks
    if pf is None:
```

**Table 27.1:** Planar simulation parameters.

| | |
|---|---|
| Trajectory | circle of radius 10 m at 1 m/s and 0.1 rad/s, 90 s (1.4 laps) |
| Odometry | 100 Hz; $\sigma_v = 0.01$ m/s/$\sqrt{\text{Hz}}$, $\sigma_\omega = 0.02$ rad/s/$\sqrt{\text{Hz}}$ |
| Camera | 10 Hz; field of view ±50°; depths 1 m–15 m; $\sigma_z = 0.003$ (1.5 px at $f = 500$ px) |
| Landmarks | 260, in two rings (radii 3 m–7 m and 13 m–19 m) |
| Window | $N_{\max} = 10$ clones (1 s) |
| Initial uncertainty | $\sigma_p = 1$ cm per axis, $\sigma_\psi = 3$ mrad |

```
        return None
    m = len(obs)
    Hx, Hf, r = np.zeros((m, self.n)), np.zeros((m, 2)), np.zeros(m)
    for row, (cid, z) in enumerate(obs):
        k = self.clone_index(cid)
        _, p_i, psi_i = self.clones[k]
        Rt = rot(psi_i).T
        pb = Rt @ (pf - p_i)                  # feature in the body frame of the clone
        Jpi = np.array([-pb[1] / pb[0]**2, 1.0 / pb[0]])   # d(y/x)/d(x, y)
        col = 3 + 3 * k                       # columns of clone k
        Hx[row, col:col + 2] = -Jpi @ Rt      # clone position
        Hx[row, col + 2] = -Jpi @ (OM @ pb)   # clone heading: -(1 + z^2)
        Hf[row] = Jpi @ Rt                    # feature position
        r[row] = z - pb[1] / pb[0]
    Q, _ = qr(Hf, mode="full")
    A = Q[:, 2:]                              # orthonormal basis of the left nullspace
    Ho, ro = A.T @ Hx, A.T @ r
    S = Ho @ self.P @ Ho.T + self.sig_z**2 * np.eye(m - 2)
    if ro @ np.linalg.solve(S, ro) > chi2.ppf(0.95, m - 2):
        self.rejected += 1                    # gated out: counted, never silent
        return None
    return Ho, ro
```

A production implementation would not form `A`; it would apply the Householder reflections of Algorithm 6 to $[H_f \mid H_x \mid r]$, and it would work only with the non-zero clone columns of $H_x$.

## 27.8 Simulation results

Table 27.1 lists the simulation set-up. The truth moves exactly on the circle; odometry samples are drawn with the noise densities of the table, and each landmark inside the field of view and depth range produces a bearing with noise $\sigma_z$. Dead reckoning, the same nominal integration without any camera update, serves as the baseline.

The results (Figures 27.2 to 27.4) illustrate four points.

1. **The camera helps, mostly through the heading.** Odometry alone accumulates a heading error with standard deviation $\sigma_\omega\sqrt{t} = 0.19$ rad after 90 s. The MSCKF ends at about 0.07 rad: the camera measures the relative rotation between clones far better than the gyro-like turn rate, and because heading errors turn into cross-track position errors, the position error drops by a factor of 2.5.
2. **The error still grows.** Even with the camera, the heading and position uncertainties grow without bound (Figure 27.3). This is not a failure: global position and heading

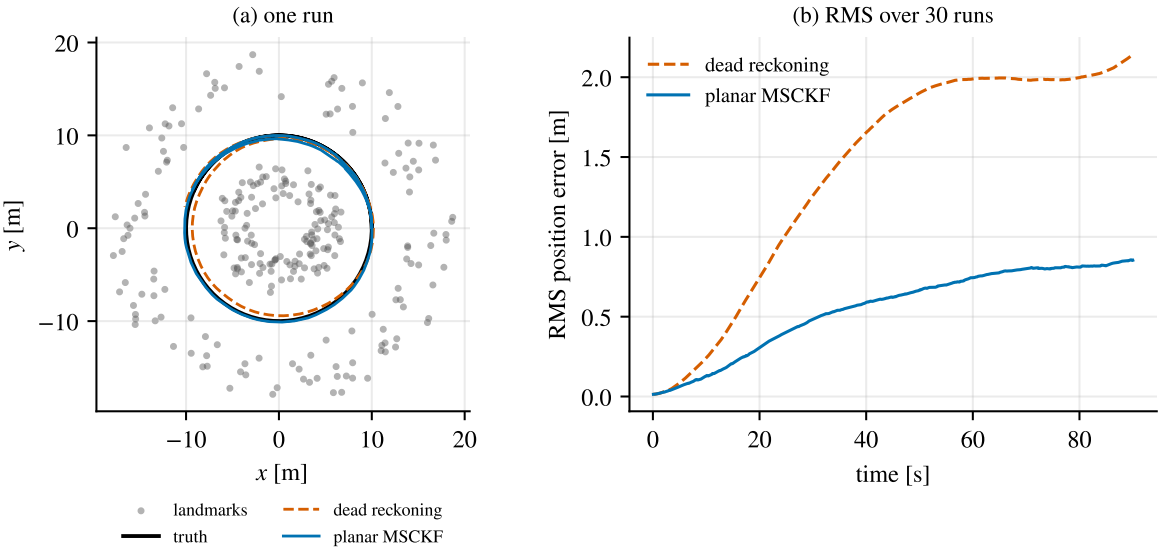



**Figure 27.2:** Planar MSCKF versus dead reckoning. (a) One run. (b) Root-mean-square position error over 30 Monte Carlo runs: after 90 s, 0.85 m for the MSCKF against 2.1 m for odometry alone.

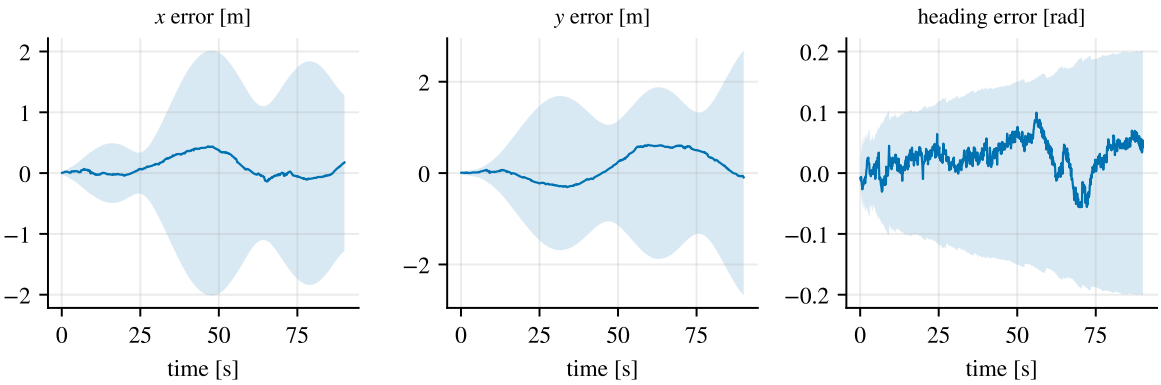



**Figure 27.3:** Estimation errors of one run with the filter's $\pm 3\sigma$ envelopes (shaded). The position envelopes oscillate because most of the position uncertainty is perpendicular to the direction of travel, which rotates as the robot circles.

are unobservable (Section 27.9), and an odometry filter without loop closures can only slow their drift, never stop it. The along-track error is set by the odometry speed noise alone, since a monocular camera cannot measure scale (the worked example above).

3. **The filter is consistent.** The errors stay inside their $3\sigma$ envelopes, and the average NEES stays inside its acceptance interval, apart from mildly conservative dips below it between about 12 and 28 s. The gate rejected 5.2% of the features, close to the 5% that a $\chi^2_{0.95}$ gate should reject when the filter is consistent and every feature is a good one; a much larger rate would signal an overconfident filter or bad data.

4. **But the NEES creeps upward.** In the second half of the run its 15-second averages rise steadily, from 2.75 to 2.86 to 3.05, with peaks near 3.5. It is still inside the interval, but the trend is systematic: the filter is beginning to believe it knows the heading better than it does. The mechanism, and its cure, are the subject of Chapter 29.

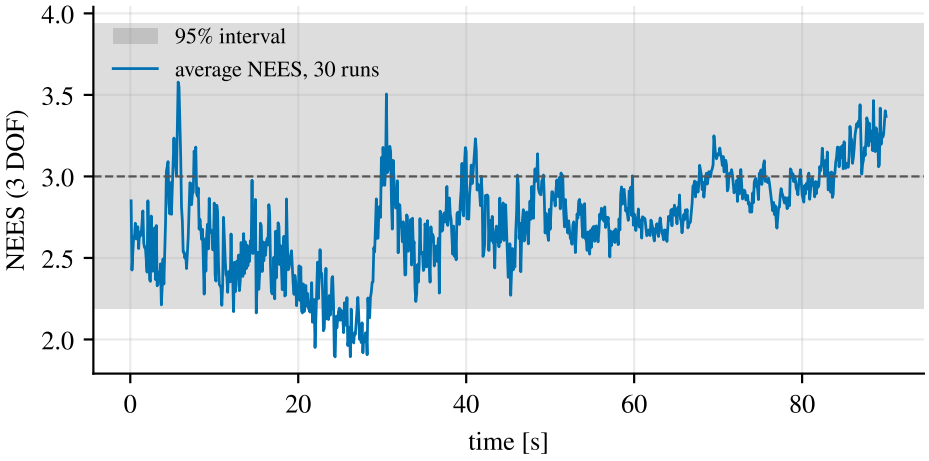



**Figure 27.4:** Average NEES of the robot pose over 30 runs, with the 95% acceptance interval of Equation (19.2).

## 27.9 The unobservable directions

Suppose we rotate the entire world, the trajectory and every feature, about the origin by a small angle, or translate it. Odometry measures speed and turn rate in the body frame and does not notice. The camera measures bearings relative to the robot and does not notice either. No sensor can therefore distinguish the true world from the rotated or translated one: these three directions are *unobservable* (Section 11.4), and the filter should never gain information along them.

In error-state coordinates the three directions are the columns of

$$N = \begin{bmatrix} N_t & N_r \end{bmatrix}, \qquad N_t = \begin{bmatrix} I_2 \\ 0 \\ I_2 \\ 0 \\ \vdots \end{bmatrix}, \qquad N_r = \begin{bmatrix} \Omega \hat{p} \\ 1 \\ \Omega \hat{p}_1 \\ 1 \\ \vdots \end{bmatrix}, \tag{27.16}$$

with one block pair for the robot and one for each clone. $N_t$ shifts every position by the same vector. $N_r$ is the derivative of a rotation about the origin: a point $p$ moves by $\delta\,\Omega p$, and every heading increases by $\delta$.

**Proposition 27.6** (The planar nullspace)**.** *If all Jacobians are evaluated at one common set of estimates, then:*

1. *every feature Jacobian satisfies $H_{x,j}N_t + H_{f,j} = 0$ and $H_{x,j}N_r + H_{f,j}\,\Omega\hat{p}_f = 0$, and therefore the projected Jacobian satisfies $H_{o,j}N = 0$;*
2. *the exact transition (27.10) maps the nullspace at step $k$ to the nullspace at step $k+1$, $\Phi_k N(\hat{x}_k) = N(\hat{x}_{k+1})$;*
3. *cloning maps $N$ to the nullspace of the augmented state, $JN = N_{aug}$.*

*Proof.* (1) Row $i$, translation: $-J_\pi R_i^\mathsf{T} + J_\pi R_i^\mathsf{T} = 0$. Rotation: using $R_i^\mathsf{T}\Omega = \Omega R_i^\mathsf{T}$ (Lemma 27.1(3)),

$$-J_\pi R_i^\mathsf{T}\Omega\hat{p}_i - J_\pi\Omega\hat{p}_{b,i} + J_\pi R_i^\mathsf{T}\Omega\hat{p}_f = J_\pi\big(\Omega R_i^\mathsf{T}(\hat{p}_f - \hat{p}_i) - \Omega\hat{p}_{b,i}\big) = J_\pi(\Omega\hat{p}_{b,i} - \Omega\hat{p}_{b,i}) = 0.$$

**Table 27.2:** The planar MSCKF and its three-dimensional counterpart.

| | Plane | Project (AGENTS.md) |
|---|---|---|
| Attitude | heading $\psi$, $R(\psi) = \exp(\psi\Omega)$ | $q_{wb}$, $R_{wb}$, Exp (Chapter 8) |
| Error and retraction | $\delta\psi = \psi - \hat{\psi}$; local and global coincide | local (right) perturbation $q = \hat{q} \otimes \mathrm{Exp}_q(\delta\theta)$ (C4) |
| Skew operator | $\Omega$, commutes with every $R(\psi)$ | $[\cdot]_\times$; $R[v]_\times R^\mathsf{T} = [Rv]_\times$, no commutation |
| Jacobian of $R^\mathsf{T}a$ w.r.t. the rotation error | $-\Omega R^\mathsf{T}a$ | the inverse-action row of Table 8.1 |
| Motion sensor | odometry $(v, \omega)$, no biases | IMU $(a_m, \omega_m)$ with gravity and biases (C6) |
| State | $(p, \psi)$ + clones, $3 + 3N$ | $(p, v, q, b_a, b_g)$ + clones, $15 + 6N$ (C3) |
| Camera | 1D bearing $z = y/x$ | 2D normalized $(x/z, y/z)$, through $T_{bc}$ (C6) |
| Constraints per feature | $M - 2$ | $2M - 3$ |
| Reset Jacobian | 1 | $I - \frac{1}{2}[\delta\hat{\theta}]_\times$ per attitude (F4) |
| Unobservable directions | 2 translations + heading | 3 translations + yaw (roll and pitch are observable through gravity) |

Multiplying by $A_j^\mathsf{T}$ and using $A_j^\mathsf{T}H_{f,j} = 0$ gives $A_j^\mathsf{T}H_{x,j}N = 0$. (2) On the robot block, $\Phi_k(I_2, 0) = (I_2, 0)$, and $\Phi_k(\Omega\hat{p}_k, 1) = (\Omega\hat{p}_k + \Omega(\hat{p}_{k+1} - \hat{p}_k), 1) = (\Omega\hat{p}_{k+1}, 1)$; clone blocks are untouched. (3) The new clone copies the robot's rows of $N$, which are exactly the rows a clone at $\hat{p}$ should have. ∎

In words: the linearized filter has the same three unobservable directions as the real system, *as long as every Jacobian uses the same estimate of each quantity*. A real filter cannot honour this condition. The transition $\Phi_k$ uses $\hat{p}_{k+1} - \hat{p}_k$ computed from the estimate before the update at step $k + 1$, while the next transition starts from the corrected estimate; and a clone is linearized at its current, corrected estimate, not at the value it had when it was created. The identities of Proposition 27.6 then hold only approximately, the linearized system has an observable heading that the real system does not, and the filter slowly gains spurious heading information. That is the upward creep in Figure 27.4. Chapter 29 analyses it in the planar EKF-SLAM setting, where it is most visible, and shows how First-Estimates Jacobians restore the nullspace.

## 27.10 From the plane to three dimensions

Table 27.2 lists every difference between the planar filter and the project's filter. None of them changes the structure of Algorithm 8; each changes a formula inside it.

**Key takeaways**

- In the plane every MSCKF Jacobian takes a line: $\partial z/\partial\delta\psi_i = -(1 + z^2)$, $\partial z/\partial\delta p_i = -J_\pi R_i^\mathsf{T}$, $H_f = J_\pi R_i^\mathsf{T}$.
- A camera measures rotation independently of depth, and translation only through

parallax ($1/x$).

- A feature seen $M$ times gives $M-2$ constraints in the plane ($2M-3$ in space); for three views the constraint is a second difference that measures the ratio of baselines and the relative headings, but not scale, global position or global heading.
- The planar filter is consistent and reduces the dead-reckoning error by a factor of about 2.5, yet its NEES creeps upward: the first sign of the spurious heading information studied in Chapter 29.
- The step to three dimensions changes formulas, not structure: non-commuting rotations, the local perturbation, gravity, biases and the reset Jacobian.

## Exercises

**27.1** Verify Proposition 27.4 by finite differences at a random clone pose and feature. Then explain $\partial z/\partial \delta\psi = -(1+z^2)$ using only the bearing angle $\beta = \arctan z$.

**27.2** Show that $I + F_c\Delta t$ and the exact $\Phi_k$ of (27.10) differ by $O(\Delta t^2)$, and identify the term.

**27.3** Add a turn-rate bias $b_\omega$ ($\omega_m = \omega + b_\omega + n_\omega$, $\dot{b}_\omega = n_b$) to the planar state. Derive the new column of $F_c$ and the new row of $G_c$, and show that the bias is observable once the camera sees features. Compare with the gyroscope-bias block of the three-dimensional filter.

**27.4** Repeat the worked example with unequal baselines, $\hat{p}_3 = (0, 2)$. Find $a$, and show that the projected residual measures the ratio of the two baselines.

**27.5** In the worked example, show that moving the *middle* clone along the viewing direction $x_w$ is invisible to $H_o$, while moving the *first* clone along $x_w$ is visible. Interpret the difference in terms of the bearing each clone has to the feature.

**27.6** Why does a 1D camera need three views of a feature to say anything about the poses, while a 2D camera needs only two? Relate the answer to the dimensions of $H_f$.

**27.7** Run `scripts/planar_sims.py` with window sizes $N_{\max} = 3, 5, 10, 20$ and plot the final RMS position error. Explain the trend, and what limits the benefit of a longer window.

**27.8** Prove part (1) of Proposition 27.6 without using the closed-form Jacobians: argue directly that a measurement function that depends only on $R(\psi_i)^\mathsf{T}(p_f - p_i)$ cannot change under a common rotation or translation of all positions.

**27.9** Replace the bearing camera by a range-and-bearing sensor. How many constraints does a feature seen $M$ times give? Which of the unobservable directions of (27.16) become observable, if any?

## Solutions to the exercises

**27.1** At a random clone pose and a feature with $\hat{z} = 0.3$, central differences with $\varepsilon = 10^{-6}$ agree with (27.13) to $10^{-10}$ in all five entries. For the heading entry, $\beta = \arctan z$ is the angle between the body axis $x_b$ and the ray to the feature. Turning the robot left by $\delta\psi$ turns the body axis toward the ray, so every bearing *decreases* by exactly $\delta\psi$, whatever the depth: $\delta\beta = -\delta\psi$. Since $z = \tan\beta$,

$$\frac{\partial z}{\partial \delta\psi} = \frac{\mathrm{d}z}{\mathrm{d}\beta}\frac{\partial \beta}{\partial \delta\psi} = \frac{1}{\cos^2\beta}(-1) = -(1+\tan^2\beta) = -(1+z^2).$$

The factor $1 + z^2$ only converts angle to normalized coordinate: at the edge of the $\pm 50°$ field of view it is 2.4, while in angle every point moves by the same $\delta\psi$.

**27.2** The top-right block of $I + F_c\Delta t$ is $\Omega R(\hat{\psi}_k)e_1 v_m \Delta t$, while that of $\Phi_k$ is $\Omega(\hat{p}_{k+1} - \hat{p}_k) = \Omega R(\hat{\psi}_k + \frac{1}{2}\omega_m\Delta t)e_1 v_m \Delta t$. With $R(\hat{\psi}_k + \frac{1}{2}\omega_m\Delta t) = R(\hat{\psi}_k)(I + \frac{1}{2}\omega_m\Delta t\,\Omega) + O(\Delta t^2)$ and $\Omega^2 = -I$,

$$\Phi_k - (I + F_c\Delta t) = \begin{bmatrix} 0 & -\frac{1}{2}v_m\omega_m\Delta t^2\, R(\hat{\psi}_k)e_1 \\ 0 & 0 \end{bmatrix} + O(\Delta t^3).$$

The term is $\frac{1}{2}\Delta t^2\,\Omega\ddot{\hat{p}}$: the nominal path turns during the step, so its displacement is not $\dot{\hat{p}}_k\Delta t$. Note that $F_c^2 = 0$, so for a *constant* $F_c$ the matrix exponential would add nothing. The whole difference comes from $F_c$ changing during the step: $I + F_c\Delta t$ is the rectangle rule for $I + \int F_c\,\mathrm{d}t$. For the simulation ($v = 1$ m/s, $\omega = 0.1$ rad/s, $\Delta t = 0.01$ s) it is $5\times10^{-6}$ per step, relative size $\frac{1}{2}\omega\Delta t = 5\times10^{-4}$. It is small, but it means the approximate transitions no longer telescope exactly into $\Omega(\hat{p}_k - \hat{p}_0)$ (Chapter 29).

**27.3** With $\omega = \omega_m - b_\omega - n_\omega$ and the nominal $\dot{\hat{\psi}} = \omega_m - \hat{b}_\omega$, $\delta\dot{\psi} = -\delta b_\omega - n_\omega$ and $\delta\dot{b}_\omega = n_b$; the position row is unchanged. For $\delta x_R = (\delta p, \delta\psi, \delta b_\omega)$ and $n = (n_v, n_\omega, n_b)$,

$$F_c = \begin{bmatrix} 0_{2\times2} & \Omega R(\hat{\psi})e_1 v_m & 0_{2\times1} \\ 0 & 0 & -1 \\ 0 & 0 & 0 \end{bmatrix}, \qquad G_c = \begin{bmatrix} -R(\hat{\psi})e_1 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & 1 \end{bmatrix},$$

with $Q_c = \mathrm{diag}(\sigma_v^2, \sigma_\omega^2, \sigma_b^2)$: the new column of $F_c$ is $(0, 0, -1, 0)^\mathsf{T}$ and the new row of $G_c$ is $(0, 0, 1)$. The camera measures relative headings of the clones directly: the heading column $-(1+z^2)$ does not depend on depth, and turning a single clone is visible. A bias error makes the heading error grow linearly across the window, $\delta\psi(t) = \delta\psi_0 - t\,\delta b_\omega$. The unobservable directions cannot produce such a ramp: a global rotation adds the same constant to every heading, and translations and scale leave headings unchanged. So the ramp changes the projected residuals, and the bias is observable. Numerically: on the simulated circle with ten clones and six landmarks, the observability matrix of $(\delta p, \delta\psi, \delta b_\omega)$ at the first clone time has rank one. Its three-dimensional nullspace (the two translations and the rotation) has bias components of $10^{-14}$. In three dimensions the attitude row is $\delta\dot{\theta} = -[\hat{\omega}]_\times\delta\theta - \delta b_g - n_g$ and the bias row $\delta\dot{b}_g = n_{b_g}$. The $-I$ in the gyro-bias columns is the exact counterpart of the $-1$ here. The extra term $-[\hat{\omega}]_\times\delta\theta$ has no planar analog, because a planar heading error does not rotate with the body. For the same reason as here, all three gyroscope-bias components are observable once

the camera measures relative attitudes: even the bias about the vertical, although the global yaw is not.

**27.4** The body-frame points are $(4,1)$, $(4,0)$, $(4,-2)$, so $\hat{z} = (\frac{1}{4}, 0, -\frac{1}{2})$ and

$$H_f = \begin{bmatrix} -\frac{1}{16} & \frac{1}{4} \\ 0 & \frac{1}{4} \\ \frac{1}{8} & \frac{1}{4} \end{bmatrix}, \qquad h_1 \times h_2 = \tfrac{1}{64}(-2,3,-1), \qquad a = \tfrac{1}{\sqrt{14}}(2,-3,1),$$

so $r_o = (2r_1 - 3r_2 + r_3)/\sqrt{14}$. For sideways motion at a fixed heading, $z_i = (y_f - y_i)/x_f$ is a linear function of the camera position $y_i = (-1, 0, 2)$, and the weights annihilate exactly the constants and the linear functions: $\sum_i a_i = 0$ and $\sum_i a_i y_i = 0$. For baselines $b_1 = y_2 - y_1$ and $b_2 = y_3 - y_2$, the weights are $(b_2, -(b_1 + b_2), b_1)$, and $r_o = 0$ exactly when

$$\frac{z_1 - z_2}{z_2 - z_3} = \frac{b_1}{b_2}.$$

The depth $x_f$ cancels in the ratio of image displacements, so the residual compares the observed ratio with the estimated ratio of the baselines, and nothing else. If the middle clone were really at $y = 0.1$, the observed ratio would be $1.1/1.9 = 0.58$ instead of $\frac{1}{2}$, and $r_o = -0.020$. The projected Jacobian is $H_o = \frac{1}{\sqrt{14}}\left[(\frac{1}{8}, -\frac{1}{2}, -\frac{17}{8}) \;\; (0, \frac{3}{4}, 3) \;\; (-\frac{1}{8}, -\frac{1}{4}, -\frac{5}{4})\right]$; translation, rotation and scale of the configuration give zero, as before.

**27.5** With $a = (1, -2, 1)/\sqrt{6}$, the $\delta p_x$ entries of $H_o$ are $\frac{1}{16\sqrt{6}}$, $0$ and $-\frac{1}{16\sqrt{6}}$. Moving the middle clone along $x_w$ is invisible; moving the first clone along $x_w$ is visible, though weakly. The middle clone looks straight at the feature ($\hat{z}_2 = 0$), so $x_w$ is its own viewing ray, the nullspace of its projection Jacobian: moving along the ray changes the depth, which one view cannot see, and leaves the bearing unchanged. The first clone sees the feature at $\hat{z}_1 = \frac{1}{4}$ (14°). Moving it along $x_w$ changes that bearing by $\frac{1}{16}$ per meter, and the feature cannot absorb the change without disturbing the other two bearings. In general, moving a clone along its ray to a feature is invisible in that feature's residual. Other directions are visible, with a sensitivity proportional to the sine of the angle between motion and ray, divided by the depth.

**27.6** Each observation gives as many numbers as the image has dimensions, and the feature has as many unknowns as the space. A 1D camera in the plane: $H_{f,j}$ is $M \times 2$ of rank 2, leaving $M - 2$ constraints, so $M = 2$ gives none. Two rays in a plane always intersect (unless parallel), so any two bearings are consistent with some feature. A 2D camera in space: $H_{f,j}$ is $2M \times 3$ of rank 3, leaving $2M - 3$, so $M = 2$ gives one. Two rays in space are generically skew, and requiring them to intersect, i.e. to be coplanar with the baseline, is the epipolar constraint (Exercise 26.3).

**27.7** Final RMS errors after 90 s over 30 runs (dead reckoning: 2.80 m):

| $N_{\max}$ (window length) | 3 (0.3 s) | 5 (0.5 s) | 10 (1 s) | 20 (2 s) |
|---|---|---|---|---|
| position | 2.23 m | 2.13 m | 0.85 m | 0.33 m |
| heading | 0.19 rad | 0.17 rad | 0.069 rad | 0.025 rad |
| average NEES (last 9 s, 3 DOF) | 2.65 | 2.97 | 3.14 | 3.20 |

The position error follows the heading error, which turns into cross-track error. The key

quantity is how well one window determines the heading change across it, a heading ramp, which the camera sees only through parallax. With the scenario's landmarks, a single window determines it with a standard deviation of 0.05, 0.022, 0.008 and 0.003 rad for $N_{\max} = 3, 5, 10, 20$. Odometry alone has $\sigma_\omega\sqrt{T} = 0.009, 0.013, 0.019$ and 0.028 rad over the same spans. Short windows are worse than odometry at exactly the quantity that drives the drift; the camera wins only for windows longer than about half a second, which is where the error drops. The benefit then levels off: 0.18 m at $N_{\max} = 40$ and 0.17 m at 80. Several things limit it:

- once the window pins the heading change far better than odometry, the remaining error is the unobservable drift of global heading and position, which no window removes;
- tracks end (here a landmark stays in view for a median of 6.8 s), so a longer window cannot lengthen them;
- the cost grows as $n^3$ with $n = 3 + 3N_{\max}$;
- old clones are never relinearized;
- the NEES creeps upward (3.24 at $N_{\max} = 80$), as more constraints feed more spurious heading information (Chapter 29).

**27.8** Let $h(x, p_f) = \pi\big(R(\psi_i)^\mathsf{T}(p_f - p_i)\big)$, or any function of $R(\psi_i)^\mathsf{T}(p_f - p_i)$. Translating everything by $t$ ($p_i \to p_i + t$, $p_f \to p_f + t$) leaves $p_f - p_i$ unchanged. Rotating everything about the origin by $\delta$ ($p_i \to R(\delta)p_i$, $\psi_i \to \psi_i + \delta$, $p_f \to R(\delta)p_f$) gives $R(\psi_i + \delta)^\mathsf{T}R(\delta)(p_f - p_i) = R(\psi_i)^\mathsf{T}R(\delta)^\mathsf{T}R(\delta)(p_f - p_i) = R(\psi_i)^\mathsf{T}(p_f - p_i)$. So $h$ is constant along both families, identically in $t$ and $\delta$. Differentiating at $t = 0$ and $\delta = 0$, at the common linearization point $(\hat{x}, \hat{p}_f)$: the state moves along $N_t$ and the feature by $I$, or the state along $N_r$ and the feature by $\Omega\hat{p}_f$. Hence

$$H_{x,j}N_t + H_{f,j} = 0, \qquad H_{x,j}N_r + H_{f,j}\,\Omega\hat{p}_f = 0,$$

and multiplying by $A_j^\mathsf{T}$ gives $H_{o,j}N = 0$. Nothing about $\pi$ was used. The proof also shows why the hypothesis matters: the identities come from differentiating one function at one point, so they hold only if every block of $H_{x,j}$ and $H_{f,j}$ is evaluated at the same estimates.

**27.9** Each observation $(\|d_i\|, \operatorname{atan2}(d_y, d_x))$ now gives two numbers for two unknowns of the feature, so a feature seen $M$ times gives $2M - 2$ constraints. A single observation determines the feature and constrains nothing; two observations already give two constraints. None of the directions of (27.16) becomes observable: the measurement is still a function of $R(\psi_i)^\mathsf{T}(p_f - p_i)$ alone, so the argument of Exercise 8 applies unchanged, and global translation and heading remain invisible. What changes is scale. The range measures distances, so the shape *and size* of the trajectory are now observable from the camera alone, and the along-track error no longer depends on the odometry speed noise only.

Chapter 28

# The Complete Algorithm

**In this chapter**

- Assemble every component into one event-driven estimator, with the correct order of operations.
- Estimate the computational budget and map the algorithm onto the project's software architecture.
- Diagnose the most common failures from their symptoms.

## 28.1 The event loop

The estimator consumes a single, time-ordered stream of sensor events. Milestone 3 builds it by merging the presorted IMU, image (and, for testing, pose) arrays with a two-pointer merge, with the rule that an IMU sample precedes any other event with the same timestamp. Algorithm 9 shows the loop.

Three ordering rules are essential.

1. **Propagate before you update.** A measurement at time $t$ must be applied to the state at time $t$, never to the state at the previous IMU sample.
2. **Use a clone's observations before you delete it.** Every feature with an observation at the oldest clone is processed before that clone is marginalized; otherwise its information is lost.
3. **Use each observation once.** After a track has been used, its observations are discarded. If the feature keeps being tracked, later observations form a new track.

With the order of Algorithm 9, the window never holds more than `kMaxClones` clones, which keeps the covariance within its fixed maximum size. A feature processed because its oldest clone is leaving cannot use the current image's observation in that update, because the new clone does not exist yet. Implementations that clone first need room for one extra clone. Either choice is valid; the storage bound must match it. The planar filter of Chapter 27 runs exactly this loop (Algorithm 8) in a few lines of Python, which makes it a convenient place to experiment with the ordering rules before committing to them in C++.

## 28.2 Initialization and the first seconds

The project initializes from ground truth, which removes the hardest failure mode from early testing and is logged as a use of ground truth (Milestone 10b). With static initialization (Chapter 16), the first seconds are delicate: the yaw is arbitrary, the accelerometer bias is

**Algorithm 9** Monocular MSCKF

**Input:** event stream, calibration, noise parameters

▷ *load phase: allocation allowed*
parse data and calibration; build the event arrays; construct the filter and front end with fixed-max workspaces
initialize $(\hat{x}, P)$ (ground truth in the project, logged; static initialization otherwise)
▷ *streaming phase: no allocation in the core*
**for** each event $e$ in timestamp order **do**
    **if** $e$ is an IMU sample at $t$ **then**
        propagate nominal state and covariance from $t_{prev}$ to $t$ ▷ Chapters 16 and 17
    **else if** $e$ is an image at $t_c$ **then**
        propagate to $t_c$ (interpolated IMU) ▷ exact image time
        front end: track, verify, undistort; update track histories ▷ Chapter 22
        process tracks that were lost in this image ▷ Algorithm 7
        **if** $N =$ `kMaxClones` **then**
            process tracks with an observation at the oldest clone
            marginalize the oldest clone in place ▷ Chapter 25
        clone $(\hat{p}, \hat{q})$; $P \leftarrow JPJ^{\mathsf{T}}$; attach this image's observations to the new clone
    log state, diag$(P)$, NIS and gate statistics to the preallocated buffer


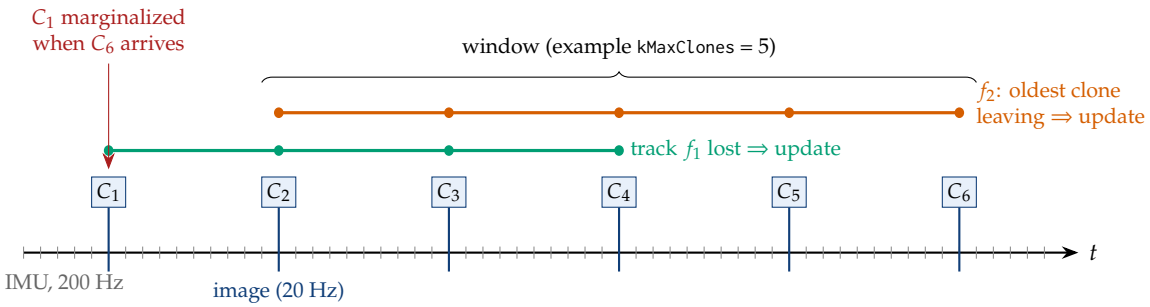



**Figure 28.1:** Timeline of the MSCKF. The IMU propagates at 200 Hz; each image creates a clone; feature tracks are processed when they end or when the clone holding their oldest observation is about to leave the window.

entangled with tilt, and the window contains few clones with little parallax. Generous initial covariances, and a check that enough features with sufficient parallax exist before trusting visual updates, avoid early divergence. Inspect the IMU data of each EuRoC sequence before running on it: a static start followed by vigorous motion is the easiest case for initialization, and a fast start the hardest.

## 28.3 Computational budget

With $N = 10$ clones the error state has $n = 75$ dimensions. Rough flop counts per operation:

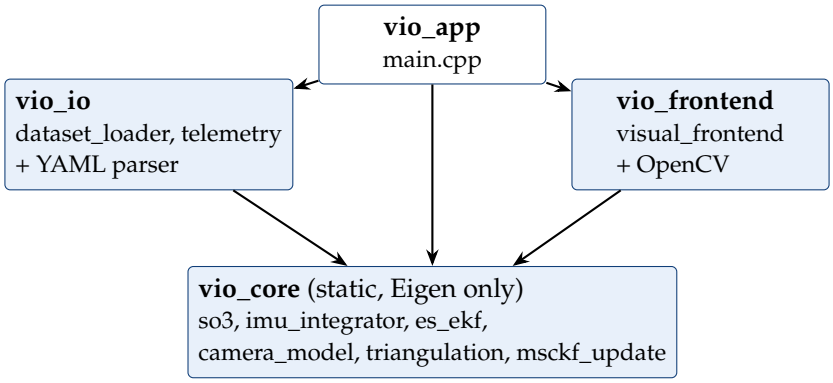


arrows: "depends on". OpenCV never reaches `vio_core`; each test links only the library it tests.

**Figure 28.2:** Library targets of the project (AGENTS.md). Dependencies point one way, so the estimator core can be built, tested and reasoned about without the I/O and vision libraries.

| Operation | Frequency | Cost (flops) |
|---|---|---|
| Nominal propagation | 200 Hz | $\sim 10^2$ |
| $P_{II}$, $P_{IC}$ propagation | 200 Hz | $\sim 4 \times 10^4$ |
| Cloning ($P \leftarrow JPJ^\mathsf{T}$ as block copies) | 20 Hz | $\sim 10^4$ |
| Per feature: triangulation, projection, gating ($M = 6$) | per track | $\sim 10^5$ |
| QR compression of $d = 450$ rows | per update | $\sim 5 \times 10^6$ |
| Update ($S$, gain, Joseph) with $n = 75$ | per update | $\sim 6 \times 10^6$ |
| Front end (KLT on 150 features) | 20 Hz | dominant in time |

The filter core needs on the order of $10^7$ flops per image, a few milliseconds on an embedded processor and well under a millisecond on a desktop. The front end is usually the bottleneck in wall-clock time. The cubic growth with $n$ is why the window is short and why QR compression matters for large stacks.

## 28.4 Software architecture

Figure 28.2 shows how the algorithm maps to the project's targets. The zero-allocation discipline applies to `vio_core`, which contains everything executed per IMU sample and per update. The front end may allocate but must reuse its buffers, and the I/O layer allocates freely during loading.

## 28.5 Debugging guide

Table 28.1 collects the failures that experience shows are most common. The milestone structure of the project is itself the most effective debugging tool: each layer is verified against known truth before the next is built on top of it, so a new failure is almost always in the newest layer.

| Symptom | Likely causes |
|---|---|
| Altitude diverges at about $2g$ in IMU-only propagation | gravity or specific-force sign; $g_w$ added twice |
| Position diverges within seconds even with ground-truth init | $R_{wb}$ used as $R_{bw}$; quaternion $w/z$ swapped at load; gyro and accel columns or biases swapped; degrees vs radians |
| Rotation matrices slowly scale vectors | missing quaternion normalization |
| NaN after a while | missing Taylor branch; Log near $\pi$; $J_r^{-1}$ evaluated beyond $\pi$; feature at zero depth; Cholesky of a non-PD $S$ |
| Corrections systematically make things worse | sign of $H$ or of the residual; injection on the wrong side of the quaternion; global vs local convention mixed |
| Covariance loses symmetry or positive definiteness | simple update form instead of Joseph; missing symmetrization; aliasing in Eigen block products |
| Nearly all features fail the gate | overconfident $P$; $T_{bc}$ inverted; pixel noise used in normalized units (or vice versa); distortion not removed; timestamps misaligned |
| Gate rejects nothing | $R_z$ or $\sigma_{uv}$ far too large; gate threshold indexed with the wrong dimension |
| Slowly growing yaw error with healthy NIS | expected EKF inconsistency along unobservable yaw (Chapter 29) |
| Scale drift | little acceleration (degenerate motion); accelerometer noise or bias badly tuned |
| Works on synthetic data, fails on EuRoC | extrinsics, time offset, distortion, noise inflation, initialization, IMU gaps |
| Results differ between runs | uninitialized memory (run the sanitizers); unseeded random generators |

**Table 28.1:** Symptoms and their most frequent causes.

## 28.6 What to expect on EuRoC

Published monocular filter-based estimators reach absolute trajectory errors of the order of 0.1 to 0.5 m on the machine-hall sequences, depending on features, tuning and initialization, with the difficult sequences (fast motion, motion blur, dark regions) considerably worse [13]. Milestone 10b sets a first-pass target of 0.5 m on MH_01 and a stretch target of 0.2 m. Yaw and position drift without bound; roll and pitch remain accurate throughout; velocity and biases converge within the first seconds of excitation.

**Key takeaways**

- One time-ordered stream; propagate to each event's time before applying it.
- At each image: process lost tracks; if the window is full, process the oldest clone's tracks and marginalize it; then clone.
- The core costs about $10^7$ flops per image; the front end usually dominates the run time.
- Dependencies point one way: `vio_core` knows nothing about files, YAML or OpenCV.
- Most failures map to a small set of sign, frame, unit and timing errors; test each layer against truth.

## Exercises

**28.1** Write the event-loop pseudocode for the alternative ordering (clone first, then process and marginalize). What capacity does it require, and what does it gain?

**28.2** Instrument a run to record the number of features processed per update, their observation counts, and the stacked row count $d$. Choose the compile-time row cap from the distribution.

**28.3** For each row of Table 28.1, design a unit or integration test that would have caught the cause before the full system was assembled.

## Solutions to the exercises

**28.1** With the clone created first, an image at $t_c$ is handled as follows:

1: propagate to $t_c$; run the front end;
2: clone $(\hat{p}, \hat{q})$; $P \leftarrow JPJ^\mathsf{T}$; attach this image's observations to the new clone (now $N+1$ clones);
3: process the tracks lost in this image;
4: **if** $N+1 >$ `kMaxClones`: process the tracks with an observation at the oldest clone (including the current observation), then marginalize the oldest clone.

The window transiently holds `kMaxClones` + 1 clones, so every fixed-max buffer ($P$, the stacked $H$, the clone container) must be sized for $15 + 6($`kMaxClones` $+ 1)$ states. The gain: a track processed because its oldest clone is leaving can include the current image's observation. That is its newest view and usually the one with the most parallax relative to the oldest, so it adds two rows per track and lengthens the baseline. The price is an update on a state six dimensions larger, about $(81/75)^3 \approx 1.26$ times the cost for `kMaxClones` = 10.

**28.2** Log, for every update, the number of features processed, each feature's $M_j$, and $d = \sum_j (2M_j - 3)$, and plot the distribution over all sequences. The planar filter of Chapter 27 ($N_{\max} = 10$, 4 500 updates) shows the typical shape. On average 2.4 features are processed per update. Most tracks reach the full window ($M = 10$ for 90% of them), because they are processed when their oldest clone leaves. The rows per update have median 16 and 99th percentile 56, but the maximum is 175. The tail comes from bursts: when the window first fills, or when many features leave the view together, nearly every visible feature is processed at once. The worst case is therefore (visible features) × (rows per full track): $150 \times (2 \cdot 10 - 3) = 2550$ rows for the project. There are two sound ways to set the cap:

- size the workspace for the worst case: $2550 \times 76$ doubles are 1.5 MB, allocated once at load time;
- better, compress incrementally: append features until the next one would not fit, QR-compress the stack to $n$ rows (Proposition 26.3), and continue. The workspace then needs only $n$ plus one feature's rows ($75 + 17$), and no feature is ever dropped.

A cap at a percentile of the distribution without either measure would silently discard information in exactly the bursts that matter. If it is used, the dropped features must be counted and logged.

**28.3** One test per row of Table 28.1:

- $2g$ *altitude divergence:* propagate a level, stationary IMU ($a_m = (0, 0, 9.81)$, $\omega_m = 0$) for 10 s from rest; position and velocity must stay zero to rounding. Then propagate free fall ($a_m = 0$) and require $v_z = -9.81\,t$.
- *Divergence within seconds:* loader tests on a fixture row with distinct values in every column (catching $w/z$ swaps, gyro/accel and bias column order, degrees). A coning test against an analytic attitude. On EuRoC, propagate IMU-only from ground truth for 1 s and compare with ground truth.

- *Vectors slowly scaled:* after $10^6$ random multiplicative updates, $\left|\|q\| - 1\right| < 10^{-12}$.
- *NaN:* Exp, Log and $J_r^{-1}$ at 0, $10^{-12}$, $\pi - 10^{-9}$ and exactly $\pi$; triangulation must reject zero and negative depths; feeding a non-PD $S$ must return an error, not a NaN; a randomized test asserting finite outputs.
- *Corrections make things worse:* finite-difference tests of every Jacobian on $\boxplus/\boxminus$. An update with a noise-free measurement must reduce the error. A mutation check: flip a sign in $H$ and confirm the test fails.
- *Covariance loses symmetry or definiteness:* after $10^4$ random updates, $\|P - P^\mathsf{T}\| < 10^{-12}\|P\|$ and $\lambda_{\min}(P) \geq 0$. Compare in-place block products with an out-of-place reference.
- *All features gated out:* a synthetic VIO run with the true noise must reject about 5% of the features (say 3–8%). A camera-model test projects a hand-computed point through $T_{bc}$ from `sensor.yaml`. A unit test checks $\sigma_{uv} = \sigma_{px}/f$.
- *Gate rejects nothing:* the same run, with a lower bound on the rejection rate; the $\chi^2$ table checked against reference values, indexed by $\dim r$.
- *Growing yaw error:* per-component NEES on synthetic data; position, roll and pitch must be consistent, and yaw growth is documented as expected.
- *Scale drift:* two synthetic runs, with low and high acceleration; the scale error must be bounded in the excited run.
- *Synthetic fine, EuRoC fails:* parse the real `T_BS` (row-major) and intrinsics, and compare with hand-copied values; distortion round trip at the corners and edges (Exercise 20.5); merge-order test (IMU before image at equal times); IMU-gap detection ($\Delta t > 2\times$ nominal flagged).
- *Run-to-run differences:* run the pipeline twice in one test and compare outputs bitwise; sanitizers in CI; seeded generators.

Part VII

# Beyond the Baseline

Chapter 29

# Observability and Consistency of VIO

**In this chapter**

- Define observability for nonlinear systems, and test it with Lie derivatives.
- Prove that VIO has four unobservable directions and write them in the project's error coordinates.
- Show, in the planar EKF-SLAM problem where every step can be computed, exactly how the standard EKF acquires spurious information, and see it happen in a Monte Carlo simulation.
- Prove that First-Estimates Jacobians restore the correct unobservable subspace, and understand the alternatives: the observability-constrained EKF, the invariant EKF and robocentric formulations.
- Know the degenerate motions that remove further information.

The planar MSCKF of Chapter 27 was consistent, but its NEES crept upward. This chapter explains the creep. The explanation needs one new idea, observability, and one careful computation, the observability matrix of a linearized filter. The computation is done in full for planar EKF-SLAM, the setting in which the effect was first understood [31, 1, 28], and then carried over to VIO.

## 29.1 Observability

### 29.1.1 Indistinguishable states

Consider a system $\dot{x} = f(x, u)$ with output $y = h(x)$. Two initial states $x_0$ and $x_0'$ are *indistinguishable* if, for every input signal $u(\cdot)$, they produce the same output signal $y(\cdot)$. No estimator, however clever, can tell them apart: the data are identical. A system is *observable* at $x_0$ if no other state is indistinguishable from it. Since estimators work locally, the useful notion is local: $x_0$ is *locally weakly observable* if it can be distinguished, over arbitrarily short time intervals, from every state in some neighborhood of it.

For linear systems the question is settled by the observability matrix (Theorem 11.5). For a time-varying linear system $\delta x_{k+1} = \Phi_k \delta x_k$, $r_k = H_k \delta x_k$ the same object reads as follows.

**Definition 29.1** (Observability matrix)**.** The observability matrix over steps $1, \dots, k$ is

$$\mathcal{O} = \begin{bmatrix} H_1 \\ H_2\Phi_1 \\ H_3\Phi_2\Phi_1 \\ \vdots \\ H_k\Phi_{k-1}\cdots\Phi_1 \end{bmatrix}. \tag{29.1}$$

An initial error $\delta x_1 \in \operatorname{null}(\mathcal{O})$ produces no change in any measurement, so it cannot be detected. $\operatorname{null}(\mathcal{O})$ is the *unobservable subspace*.

A Kalman filter can gain information only in directions outside $\operatorname{null}(\mathcal{O})$. Along unobservable directions its covariance may grow (from process noise) but must never shrink. This is the property that the standard EKF violates.

### 29.1.2 Nonlinear observability and Lie derivatives

For a nonlinear system the observability matrix is replaced by derivatives of the output along the dynamics. Suppose the dynamics are *control-affine*, $\dot{x} = f_0(x) + \sum_i f_i(x)\, u_i$, as kinematic models usually are (the inputs are the measured rates and accelerations). The *Lie derivative* of a scalar function $\varphi$ along a vector field $f$ is its rate of change along the flow of $f$,

$$L_f\varphi(x) = \nabla\varphi(x) \cdot f(x), \tag{29.2}$$

and repeated derivatives are written $L_g L_f \varphi = \nabla(L_f\varphi) \cdot g$. Differentiating the output along a trajectory gives

$$y = h(x), \qquad \dot{y} = L_{f_0}h + \sum_i u_i\, L_{f_i}h, \qquad \ddot{y} = \dots \tag{29.3}$$

Because the inputs can be varied freely, each Lie derivative $L_{f_i}h$ is, in effect, a separate measured function of the state, and so are the higher ones. If enough of them are available, their values pin down the state.

**Theorem 29.2** (Observability rank condition [24])**.** *Let $d\mathcal{O}(x)$ be the span of the gradients of $h$ and of all its repeated Lie derivatives $L_{f_{i_1}}\cdots L_{f_{i_m}}h$ along the vector fields of the system. If $\dim d\mathcal{O}(x_0) = n$, the system is locally weakly observable at $x_0$.*

*Idea of the proof.* Choose $n$ of the functions whose gradients are independent at $x_0$ and stack them into $\Psi(x) \in \mathbb{R}^n$. Each is determined by the output and the inputs (by differentiation), and $\Psi$ has an invertible Jacobian at $x_0$, so by the inverse function theorem it is one-to-one near $x_0$. Two nearby states with the same outputs would have the same $\Psi$, hence coincide. ∎

For a linear system, $f_0 = Ax$ and $h = Cx$, the gradients are $C, CA, CA^2, \dots$: the rank condition is Theorem 11.5. For analytic systems the condition is also necessary in a generic sense, so a rank deficiency at typical states signals a genuine family of indistinguishable states.

**Worked example: a planar robot and a landmark**

A planar robot (Chapter 27) with pose $(p, \psi)$ measures the position of a landmark $\ell$ in its body frame, $h = R(\psi)^\mathsf{T}(\ell - p) \in \mathbb{R}^2$. Its kinematics are $\dot{p} = R(\psi)e_1 v$ and $\dot{\psi} = \omega$, that is $f_v = (R(\psi)e_1, 0)$ and $f_\omega = (0, 1)$ with inputs $v$ and $\omega$.
*Unknown landmark.* The state is $x = (p, \psi, \ell) \in \mathbb{R}^5$. With $\partial(R^\mathsf{T}a)/\partial\psi = -\Omega R^\mathsf{T}a$ (Lemma 27.1),

$$\nabla h = \begin{bmatrix} -R^\mathsf{T} & -\Omega h & R^\mathsf{T} \end{bmatrix}, \qquad L_{f_v} h = -R^\mathsf{T} R e_1 = -e_1, \qquad L_{f_\omega} h = -\Omega h.$$

The first Lie derivative is constant (its gradient is zero), and $\nabla(L_{f_\omega} h) = -\Omega \nabla h$ has the same row space as $\nabla h$. Every further derivative repeats the pattern, so $\dim d\mathcal{O} = 2$: three of the five directions are unobservable. They are the two global translations and the global rotation, exactly the directions of Section 27.9.
*Known landmark.* If $\ell$ is known, $x = (p, \psi) \in \mathbb{R}^3$, the gradients are $[-R^\mathsf{T} \;\; -\Omega h]$ and its multiples by $\Omega$, and the rank is 2: one direction is unobservable. It is the rotation of the robot about the landmark, which leaves the body-frame landmark position unchanged. One known landmark fixes position but not heading; two fix both.

## 29.2 The four unobservable directions of VIO

**Theorem 29.3** (Unobservable directions of VIO)**.** *For monocular VIO with point features, applying the same global translation $t$ and the same rotation $R_z(\alpha)$ about the gravity direction to all positions, velocities, attitudes, clones and features leaves every IMU and camera measurement unchanged. The state is therefore unobservable along these four directions.*

*Proof.* Under $p \mapsto R_z p + t$, $v \mapsto R_z v$, $R_{wb} \mapsto R_z R_{wb}$, $p_f \mapsto R_z p_f + t$, with biases unchanged:

- the gyroscope measures $[\omega_b]_\times = R_{wb}^\mathsf{T} \dot{R}_{wb}$, which is invariant because $R_z$ is constant;
- the accelerometer measures $R_{wb}^\mathsf{T} R_z^\mathsf{T}(R_z a_w - g_w) = R_{wb}^\mathsf{T}(a_w - R_z^\mathsf{T} g_w) = R_{wb}^\mathsf{T}(a_w - g_w)$, because a rotation about gravity leaves $g_w$ unchanged;
- the camera sees $R_{bc}^\mathsf{T}\big(R_{wb}^\mathsf{T} R_z^\mathsf{T}(R_z p_f + t - R_z p - t) - p_{bc}\big) = R_{bc}^\mathsf{T}\big(R_{wb}^\mathsf{T}(p_f - p) - p_{bc}\big)$.

All measurements are identical, so the transformed and original trajectories cannot be distinguished. ∎

Rotations about horizontal axes are *not* in this family, because they would rotate gravity in the accelerometer equation; roll and pitch are observable. Scaling is not either, because it would scale the accelerations the accelerometer measures; scale is observable as long as the vehicle accelerates. That the remaining directions (velocity, roll, pitch, scale, biases) *are* observable under general motion is proved with the rank condition of Theorem 29.2; see [25] for the computation.

Linearizing the transformation gives the unobservable directions in the project's error coordinates. With $e_z$ the vertical unit vector, a small yaw rotation $\alpha$ and a small translation $t$

change the state by (verified numerically):

$$\underbrace{\begin{bmatrix} \delta p \\ \delta v \\ \delta\theta \\ \delta b_a \\ \delta b_g \\ \delta p_i \\ \delta\theta_i \\ \delta p_f \end{bmatrix}}_{\text{error state}} = \underbrace{\begin{bmatrix} I_3 & -[\hat{p}]_\times e_z \\ 0 & -[\hat{v}]_\times e_z \\ 0 & \hat{R}^\mathsf{T} e_z \\ 0 & 0 \\ 0 & 0 \\ I_3 & -[\hat{p}_i]_\times e_z \\ 0 & \hat{R}_i^\mathsf{T} e_z \\ I_3 & -[\hat{p}_f]_\times e_z \end{bmatrix}}_{N} \begin{bmatrix} t \\ \alpha \end{bmatrix}. \tag{29.4}$$

The last row applies only to formulations that keep features in the state. The position entries follow from $R_z(\alpha)p \approx p + \alpha\, e_z \times p = p - \alpha[p]_\times e_z$; the attitude entry is $\hat{R}^\mathsf{T} e_z$ because the error is local: $\mathrm{Exp}(\alpha e_z)\hat{R} = \hat{R}\ \mathrm{Exp}(\alpha \hat{R}^\mathsf{T} e_z)$, a rotation about the world vertical expressed in body axes. Every column of $N$ *depends on the estimate*: the yaw column involves $\hat{p}$, $\hat{v}$, $\hat{R}$ and the clone and feature estimates. That dependence is the root of the problem. Equation (27.16) is the planar version, with $\Omega\hat{p}$ in place of $-[\hat{p}]_\times e_z$.

## 29.3 Why the standard EKF becomes overconfident

If every Jacobian were evaluated at the true state, the linearized system would satisfy $ON = 0$ at all times, and the filter would never gain information along $N$. The EKF instead evaluates each Jacobian at the best estimate available when it is computed. The transition matrix $\Phi_k$ is evaluated at the estimate after the update at step $k$, while the measurement Jacobian at step $k$ was evaluated at the estimate before that update. The same physical state enters the observability matrix linearized at two different points, and the products $H_k\Phi_{k-1}\cdots\Phi_1 N$ no longer cancel. The planar EKF-SLAM problem shows this in a computation short enough to do completely.

### 29.3.1 Planar EKF-SLAM

The state is the robot pose and $L$ landmarks, $x = (p, \psi, \ell_1, \ldots, \ell_L)$, with additive errors. Odometry propagates the robot ($p_{k+1} = p_k + R(\psi_k)e_1 v_m \Delta t$, $\psi_{k+1} = \psi_k + \omega_m \Delta t$), landmarks are static, and an observation of landmark $j$ is its position in the body frame, $z = R(\psi)^\mathsf{T}(\ell_j - p) + n$. Writing $\hat{x}_{k|k-1}$ for the propagated estimate at step $k$ and $\hat{x}_{k|k}$ for the updated one, the EKF uses

$$\Phi_k = \begin{bmatrix} I_2 & \Omega\,(\hat{p}_{k+1|k} - \hat{p}_{k|k}) \\ 0 & 1 \end{bmatrix} \oplus I_{2L}, \tag{29.5}$$

$$H_k = \begin{bmatrix} -\hat{R}_k^\mathsf{T} & -\Omega\hat{R}_k^\mathsf{T}(\hat{\ell}_j - \hat{p}_{k|k-1}) & 0\cdots 0 & \hat{R}_k^\mathsf{T} & 0\cdots 0 \end{bmatrix}, \qquad \hat{R}_k = R(\hat{\psi}_{k|k-1}), \tag{29.6}$$

where $\Phi_k$ follows from Proposition 27.3 (the step starts from the updated estimate), $H_k$ from the derivation of Proposition 27.4 without the projection, and $\hat{\ell}_j$ is the landmark estimate at the time of the update. The candidate unobservable directions, by the argument of

Section 27.9, are the translations $N_t = (I_2, 0, I_2, \dots, I_2)$ and the rotation

$$N_r(\bar{p}, \bar{\ell}) = \big(\Omega\bar{p},\ 1,\ \Omega\bar{\ell}_1,\ \dots,\ \Omega\bar{\ell}_L\big), \tag{29.7}$$

built from some reference values $\bar{p}$, $\bar{\ell}_j$ of the positions.

**Theorem 29.4** (Observability of linearized planar EKF-SLAM). *Let $\Delta_i = \hat{p}_{i|i} - \hat{p}_{i|i-1}$ be the correction of the robot position by the update at step $i$, and $D_k = \sum_{i=1}^{k-1} \Delta_i$ (with $D_1 = 0$). For every $k$, $H_k \Phi_{k-1} \cdots \Phi_1 N_t = 0$, while*

$$H_k \Phi_{k-1} \cdots \Phi_1 \, N_r(\hat{p}_{1|0}, \bar{\ell}) = \hat{R}_k^\mathsf{T} \, \Omega \, \big(D_k + \bar{\ell}_j - \hat{\ell}_j\big). \tag{29.8}$$

*Proof.* Each $\Phi_i$ is the identity plus a term in the heading column, so the product is $\Phi_{k-1} \cdots \Phi_1 = \begin{bmatrix} I & \Omega\, s_k \\ 0 & 1 \end{bmatrix} \oplus I$ with

$$s_k = \sum_{i=1}^{k-1} \big(\hat{p}_{i+1|i} - \hat{p}_{i|i}\big) = \sum_{i=1}^{k-1} \big(\hat{p}_{i+1|i} - \hat{p}_{i|i-1}\big) - \sum_{i=1}^{k-1} \big(\hat{p}_{i|i} - \hat{p}_{i|i-1}\big) = \hat{p}_{k|k-1} - \hat{p}_{1|0} - D_k,$$

since the first sum telescopes. Translations: the product leaves $N_t$ unchanged and $H_k N_t = -\hat{R}_k^\mathsf{T} + \hat{R}_k^\mathsf{T} = 0$. Rotation: the product maps the robot entries $(\Omega\hat{p}_{1|0}, 1)$ to $(\Omega\hat{p}_{1|0} + \Omega s_k, 1) = (\Omega(\hat{p}_{k|k-1} - D_k), 1)$ and leaves the landmark entries alone, so

$$H_k(\cdot) = -\hat{R}_k^\mathsf{T}\Omega(\hat{p}_{k|k-1} - D_k) - \Omega\hat{R}_k^\mathsf{T}(\hat{\ell}_j - \hat{p}_{k|k-1}) + \hat{R}_k^\mathsf{T}\Omega\bar{\ell}_j = \hat{R}_k^\mathsf{T}\Omega\big(D_k + \bar{\ell}_j - \hat{\ell}_j\big),$$

using $\hat{R}_k^\mathsf{T}\Omega = \Omega\hat{R}_k^\mathsf{T}$; the $\hat{p}_{k|k-1}$ terms cancel. ∎

Equation (29.8) is the whole story. The rotation direction stays in the nullspace only if two things vanish:

- $D_k$, the accumulated corrections of the robot position. They vanish only if the transition matrices telescope, which requires each $\Phi_i$ to start where the previous one ended. The EKF starts each $\Phi_i$ from the *updated* estimate $\hat{p}_{i|i}$, while the previous one ended at the *propagated* estimate $\hat{p}_{i|i-1}$.
- $\bar{\ell}_j - \hat{\ell}_j$, the change of the landmark estimate between its linearization points. A single fixed reference $\bar{\ell}_j$ cannot match an estimate that every update moves.

For generic estimates no other choice of reference values makes (29.8) vanish for all $k$, and the unobservable subspace of the EKF's linearized model shrinks from three dimensions to two [28]: the heading has become observable. The filter then extracts *spurious information* about the global heading from measurements that contain none. The size of the leak is set by the size of the corrections and of the landmark estimate changes; it is largest at loop closures, when a robot that has drifted re-observes old landmarks and receives large corrections.

### 29.3.2 From planar SLAM to VIO

The same mechanism operates in VIO. The translation columns of (29.4) survive, because all Jacobians depend only on *differences* of positions. The yaw column does not: with estimate-dependent Jacobians $O N_{\text{yaw}} \neq 0$, and the unobservable subspace of the EKF's

linearized model has dimension three instead of four [34, 25]. In the MSCKF, the clones play the role of the landmarks: a clone is created from the propagated estimate, and every later update moves it, so its linearization point in a measurement Jacobian differs from the one at which it entered the filter. The filter becomes overconfident in yaw, and because yaw errors couple into position through the trajectory, its position covariance becomes too small as well. On long trajectories the NEES of yaw and position grows steadily while the NIS can look perfectly healthy: the inconsistency lives in directions the measurements do not see (Table 19.1).

**Key idea: an inconsistency that no unit test catches**

EKF yaw inconsistency is not a bug in the usual sense: every Jacobian can pass its finite-difference test. It is a property of linearizing at estimates that change over time. Milestone 10b therefore expects it, and asks for it to be measured and documented rather than fixed.

## 29.4 First-Estimates Jacobians

The cure suggested by (29.8) is to make both terms vanish by construction: evaluate every Jacobian that involves a state at the *first* estimate of that state, the value it had when it entered the filter, rather than at the latest one [27, 28].

**Proposition 29.5** (FEJ restores the nullspace)**.** *In planar EKF-SLAM, evaluate the transition matrix with the propagated estimates at both ends,*

$$\Phi_k^{\mathrm{FEJ}} = \begin{bmatrix} I_2 & \Omega\,(\hat{p}_{k+1|k} - \hat{p}_{k|k-1}) \\ 0 & 1 \end{bmatrix} \oplus I, \tag{29.9}$$

*and the measurement Jacobian at the propagated robot estimate $\hat{x}_{k|k-1}$ and at the* first estimate *$\hat{\ell}_j^{(1)}$ of each landmark. Initialize each landmark from the propagated robot estimate, $\hat{\ell}_j^{(1)} = \hat{p}_{k|k-1} + R(\hat{\psi}_{k|k-1})z$, with the augmentation Jacobian evaluated there. Then $ON = 0$ for all $k$, with $N = [N_t \;\; N_r(\hat{p}_{1|0}, \hat{\ell}^{(1)})]$.*

*Proof.* The transition matrices now telescope: $\sum_i(\hat{p}_{i+1|i} - \hat{p}_{i|i-1}) = \hat{p}_{k|k-1} - \hat{p}_{1|0}$, so $D_k$ is replaced by zero. The landmark linearization point is fixed at $\hat{\ell}_j^{(1)}$, which is also the reference value in $N_r$, so $\bar{\ell}_j - \hat{\ell}_j = 0$. Both terms of (29.8) vanish. For a landmark initialized at step $k$, the augmentation Jacobian $[I_2 \;\; \Omega R(\hat{\psi}_{k|k-1})z \;\; 0]$ maps the robot part of $N_r$, $(\Omega\hat{p}_{k|k-1}, 1)$, to $\Omega(\hat{p}_{k|k-1} + R(\hat{\psi}_{k|k-1})z) = \Omega\hat{\ell}_j^{(1)}$: exactly the entry $N_r$ needs for the new landmark. ∎

Only the *Jacobians* change. The residuals are still computed with the latest estimates, the mean is still propagated and updated as before, and the filter still uses all its information. The price is that each Jacobian is evaluated slightly away from the best estimate, which adds linearization error; when the first estimates are poor this can matter, but in practice FEJ filters are markedly more consistent and usually more accurate.

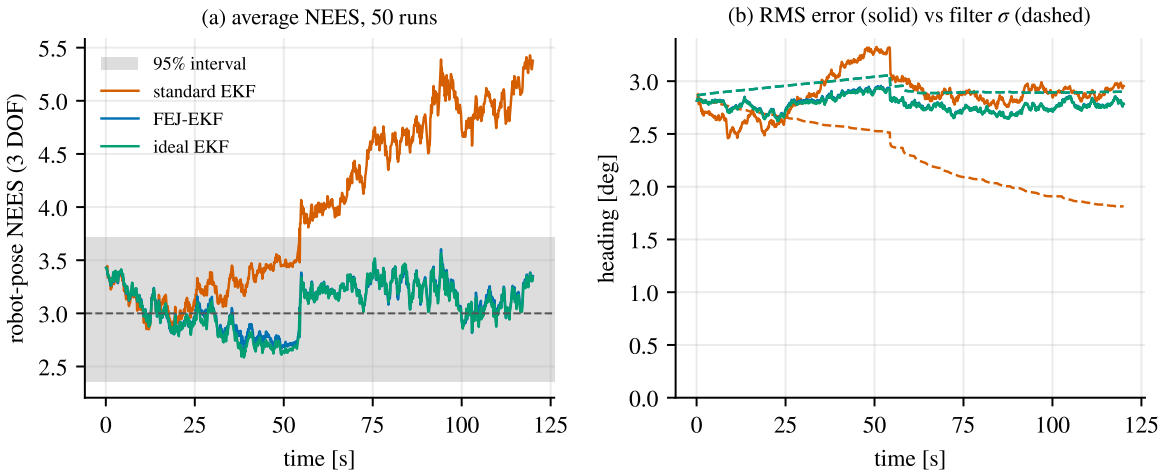



**Figure 29.1:** Planar EKF-SLAM, 50 Monte Carlo runs. (a) Average NEES of the robot pose: the standard EKF leaves the 95% interval after the first loop closure (about 55 s) and keeps rising, while the FEJ-EKF and the ideal EKF stay consistent. (b) Heading: actual RMS error (solid) and the filter's own standard deviation (dashed). The initial heading is unobservable, so a consistent, realizable filter keeps reporting about its initial 2.9°, as the FEJ-EKF does. The standard EKF's reported uncertainty falls to 1.8° while its actual error stays near 3°.

### 29.4.1 A numerical demonstration

Figure 29.1 compares three filters on the same simulated data (`scripts/planar_sims.py`). A robot drives almost twice around a circle of radius 10 m at 1 m/s (120 s), sampling odometry at 10 Hz (per-sample noise 0.05 m/s in speed and 0.01 rad/s in turn rate), and measures the body-frame position of every landmark within 5 m (20 landmarks are scattered around the circle), with 0.1 m noise per axis. The initial pose estimate has 0.1 m position and 0.05 rad heading uncertainty. The three filters differ only in where they evaluate their Jacobians:

- the *standard EKF* uses the latest estimates, (29.5)–(29.6);
- the *FEJ-EKF* follows Proposition 29.5;
- the *ideal EKF* evaluates every Jacobian at the true state, including the landmark-initialization Jacobian. It is not realizable, but it is the benchmark for consistency, since its linearized model has the true nullspace.

The heading panel makes the failure concrete. The initial heading error is unobservable, so no filter can reduce it: the RMS heading error of all three filters stays near its initial value of about 2.9°. The FEJ and ideal filters report standard deviations that match their errors. The standard EKF reports a standard deviation that shrinks steadily, fastest at the loop closure, until its variance is less than 40% of its actual mean squared error. It has "learned" the global heading from relative measurements, which is impossible. Its NEES grows accordingly, and nothing in its innovations reveals the problem.

### 29.4.2 FEJ in the MSCKF

The rule generalizes directly [34]: *every state appears in the observability matrix at a single linearization point*. Concretely:

1. **Propagation.** The transition matrix from $t_k$ to $t_{k+1}$ is evaluated with the propagated estimates at both ends, $\hat{x}_{k|k-1}$ and $\hat{x}_{k+1|k}$, wherever it depends on the state (positions, velocities, attitudes). The test is the planar one: the product of consecutive transition matrices must telescope.
2. **Measurement.** Each clone enters the camera Jacobians at its *first estimate*, the pose it had when it was cloned, not its current corrected value. The residual still uses the current value.
3. **Feature.** The feature position used in $H_{x,j}$ and $H_{f,j}$ can be any single estimate (for example the triangulation from the current clone estimates), because the feature is eliminated: $A_j^\mathsf{T} H_{f,j} N_f = 0$ for whatever $N_f$ the chosen value implies.

The precise formulas depend on the error parameterization. For yours, the systematic procedure is: write $N$ in your error coordinates ((29.4)), then choose the linearization points so that $\Phi_k N_k = N_{k+1}$ and $H_k N_k = 0$ hold *exactly*, with $N_k$ built from the first estimates. Even attitude blocks that do not seem to depend on the state may need attention: with a local attitude error, the yaw entry $\hat{R}^\mathsf{T} e_z$ of $N$ depends on the attitude estimate, so the attitude block of $\Phi_k$ must map $\hat{R}_{k|k-1}^\mathsf{T} e_z$ to $\hat{R}_{k+1|k}^\mathsf{T} e_z$.

**Implementation note: storing first estimates without allocation**

FEJ needs, for each clone, a second copy of its pose (the first estimate) next to the current one, and for the IMU state the propagated estimate of the previous step. Both fit in fixed-size arrays sized by `kMaxClones`, so the zero-allocation rules of AGENTS.md E4 are unaffected. A direct test: on a synthetic run, compute $\|ON\|$ (or simply $\|H_k N_k\|$ and $\|\Phi_k N_k - N_{k+1}\|$ at every step) for the standard and the FEJ filter. The FEJ values should be at rounding level, the standard ones visibly larger.

## 29.5 Other remedies

### 29.5.1 Observability-constrained EKF

Instead of choosing linearization points, the observability-constrained EKF (OC-EKF) [25] computes Jacobians at the latest estimates and then modifies them minimally so that the nullspace conditions hold.

**Proposition 29.6** (Minimal Jacobian corrections). *Let $N_k$ have full column rank. The matrix closest to $H$ in the Frobenius norm that satisfies $H^* N_k = 0$ is*

$$H^* = H\big(I - N_k (N_k^\mathsf{T} N_k)^{-1} N_k^\mathsf{T}\big), \tag{29.10}$$

*and the matrix closest to $\Phi$ that satisfies $\Phi^* N_k = N_{k+1}$ is*

$$\Phi^* = \Phi + (N_{k+1} - \Phi N_k)(N_k^\mathsf{T} N_k)^{-1} N_k^\mathsf{T}. \tag{29.11}$$

*Proof.* The Frobenius norm is the sum of the squared norms of the rows, and the constraints act on each row separately: row $h$ must satisfy $h^* N_k = c$ for a given row vector $c$ ($c = 0$ for $H$, a row of $N_{k+1}$ for $\Phi$). Minimizing $\|h^* - h\|^2$ subject to $h^* N_k = c$ is a least-norm problem for the correction $d = h^* - h$: $dN_k = c - hN_k$. Its minimum-norm solution is $d = (c - hN_k)(N_k^\mathsf{T} N_k)^{-1} N_k^\mathsf{T}$ (Section 3.5), which gives both formulas. ∎

The OC-EKF thus projects the information along $N$ out of every measurement and enforces the correct propagation of $N$, so the linearized model has the correct unobservable subspace by construction. The choice of $N_k$ (which estimates to build it from) still matters; Hesch et al. build it from the propagated estimates.

### 29.5.2 Invariant EKF

The invariant EKF [5] attacks the root cause: the estimate dependence of $N$. It represents the IMU state as one element of the *extended pose group* $\mathrm{SE}_2(3)$,

$$X = \begin{bmatrix} R & v & p \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \in \mathbb{R}^{5\times 5}, \qquad X^{-1} = \begin{bmatrix} R^\mathsf{T} & -R^\mathsf{T} v & -R^\mathsf{T} p \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}, \tag{29.12}$$

a generalization of SE(3) (Section 8.12) with two translation-like columns (features can be appended as further columns), and it defines the error as the *right-invariant* group error $\eta = \hat{X} X^{-1} = \mathrm{Exp}(\xi)$, with $\xi = (\xi_R, \xi_v, \xi_p) \in \mathbb{R}^9$.

**Proposition 29.7** (Constant unobservable directions)**.** *In right-invariant error coordinates, the four unobservable directions of Theorem 29.3 are the constant vectors $\xi = (e_z, 0, 0)$ (yaw) and $\xi = (0, 0, t)$, $t \in \mathbb{R}^3$ (translation), independent of the estimate.*

*Proof.* A global yaw and translation act on the true state from the left: $X \mapsto GX$ with $G = \begin{bmatrix} R_z & 0 & t \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$, which is $p \mapsto R_z p + t$, $v \mapsto R_z v$, $R \mapsto R_z R$. The error becomes $\hat{X}(GX)^{-1} = \hat{X} X^{-1} G^{-1} = \eta\, G^{-1}$. For small errors and a small $G = \mathrm{Exp}(\epsilon)$, with $\epsilon = (\alpha e_z, 0, t)$, the product $\mathrm{Exp}(\xi)\,\mathrm{Exp}(-\epsilon)$ is $\mathrm{Exp}(\xi - \epsilon)$ to first order. The family of indistinguishable states therefore differs, in error coordinates, by the constant vectors $\epsilon$. ∎

Compare (29.4), where the yaw direction involves $\hat{p}$, $\hat{v}$ and $\hat{R}$. Because the group structure couples rotation with velocity and position, a global yaw is a pure rotation error in these coordinates. Two consequences follow. The linearized error dynamics of the IMU (without biases) are independent of the estimate, $\dot{\xi} = A\xi + \dots$ with $A = \begin{bmatrix} 0 & 0 & 0 \\ [g_w]_\times & 0 & 0 \\ 0 & I & 0 \end{bmatrix}$, and $AN = 0$ because $[g_w]_\times e_z = 0$; and since every measurement is invariant under $X \mapsto GX$, every measurement Jacobian, evaluated at *any* estimate, annihilates the constant $N$. The linearized filter has the correct unobservable subspace by construction, with no bookkeeping of first estimates. Biases break the exact estimate-independence of the error dynamics, but not this nullspace property, since $N$ has no bias components. The price is a different state

representation, different Jacobians, and a different reset; it is a deviation from AGENTS.md C3–C4 that this project does not take.

### 29.5.3 Robocentric formulations

A robocentric filter expresses everything relative to the current body frame, so the unobservable global quantities are not estimated at all, and the global pose is recovered by composing relative motions outside the filter. The nullspace problem disappears with the unobservable states, at the cost of a more complex propagation in which every state moves when the body moves.

| Remedy | What changes | Cost |
|---|---|---|
| FEJ | linearization points of $\Phi$ and $H$ | store first estimates; slightly larger linearization error |
| OC-EKF | Jacobians projected onto the constraint | build $N_k$ each step; extra products |
| Invariant EKF | state representation and error definition | new derivations; leaves the frozen conventions |
| Robocentric | state is relative to the body | more complex propagation |

## 29.6 Degenerate motions

Theorem 29.3 assumes *general* motion. Some motions remove further directions [55].

| Motion | What becomes unobservable |
|---|---|
| constant velocity (no acceleration) | metric scale |
| pure rotation (no translation) | feature depths and translation scale |
| no rotation | accelerometer bias inseparable from the gravity direction (tilt) |
| at rest | both of the above, plus everything that needs parallax |

Each row has a short explanation. At constant velocity the accelerometer measures only gravity and bias, so nothing ties the size of the camera's (scale-free) motion estimate to meters. Without translation there is no parallax, so depths, and with them the scale of the translation, cannot be triangulated. Without rotation the gravity direction in the body frame is constant, and a constant error in it is indistinguishable from a constant accelerometer bias; rotation makes gravity sweep through the body axes while the bias stays fixed, which separates them.

The filter does not fail during such motions, provided it is consistent: its covariance simply stops shrinking along the affected directions until informative motion returns. An inconsistent filter, by contrast, may "learn" these quantities from noise. When a vehicle is known to be stationary, a *zero-velocity update* (the pseudo-measurement $v = 0$, Chapter 18) supplies real information and stops drift, which is why many systems detect stillness explicitly.

**Key takeaways**

- The unobservable subspace is the nullspace of the observability matrix; a filter must not gain information along it. For nonlinear systems, the gradients of the output's Lie derivatives play the role of the observability matrix.

- VIO has four unobservable directions: global translation and rotation about gravity. Roll, pitch and scale are observable under general motion.
- In local error coordinates the yaw direction is $\hat{R}^\mathsf{T} e_z$ for the attitude and $-[\hat{p}]_\times e_z$ for positions: it depends on the estimate.
- Linearizing the same state at different estimates makes the global heading spuriously observable: in planar SLAM the leak is $\hat{R}_k^\mathsf{T}\Omega(D_k + \bar{\ell}_j - \hat{\ell}_j)$, driven by the accumulated corrections and the drift of the landmark estimates.
- FEJ restores the nullspace by fixing each state's linearization point; OC-EKF projects the Jacobians; the invariant EKF makes the unobservable directions constant; degenerate motions remove further directions.

## Exercises

**29.1** Verify (29.4) numerically: apply a small yaw rotation and translation to a random state and compute $x' \boxminus x$.

**29.2** Show that the translation columns of $N$ remain in the nullspace of the EKF's observability matrix even when Jacobians are evaluated at changing estimates.

**29.3** Redo the worked example on Lie derivatives with two unknown landmarks. What is the rank of $d\mathcal{O}$, and what are the unobservable directions?

**29.4** Repeat Theorem 29.4 for range-and-bearing measurements, $z = (\|d\|, \operatorname{atan2}(d_y, d_x))$ with $d = R(\psi)^\mathsf{T}(\ell_j - p)$. Show that the leak has the same form.

**29.5** Modify `scripts/planar_sims.py` to print $\|H_k \Phi_{k-1} \cdots \Phi_1 N\|$ for the three filters of Figure 29.1, and confirm that only the standard EKF violates the nullspace condition.

**29.6** Prove that the minimum-norm solution used in Proposition 29.6 is indeed the minimizer, by writing $d = d_\parallel + d_\perp$ with $d_\parallel$ in the row space of $N_k^\mathsf{T}$.

**29.7** Implement a zero-velocity update as an EKF measurement and derive its $H$. When is it safe to apply?

**29.8** Read [34] and list which Jacobians must be evaluated at first estimates in the MSCKF. Sketch how you would store the first estimates in the project's data structures without allocation.

## Solutions to the exercises

**29.1** Draw a random state (IMU, one clone, one feature). Apply $p \mapsto R_z p + t$, $v \mapsto R_z v$, $R \mapsto R_z R$ (and the same to the clone and the feature) with $R_z = \mathrm{Exp}(\alpha e_z)$, leaving the biases unchanged. Compute $x' \boxminus x$ with the local attitude difference $\mathrm{Log}(\hat{R}^\mathsf{T} R')$, and compare it with $N[t;\ \alpha]$. With $\|t\|, |\alpha| \approx 10^{-3}$, the discrepancy is $4 \times 10^{-5}$ against entries of $3 \times 10^{-2}$. With $10^{-5}$ it is $2 \times 10^{-10}$ against $6 \times 10^{-5}$: it falls quadratically, so $N$ is the exact first-order map. The attitude rows come out as $\hat{R}^\mathsf{T} e_z$ and $\hat{R}_i^\mathsf{T} e_z$. With a global attitude error they would be the constant $e_z$, a reminder that $N$ must be written in the filter's own error coordinates.

**29.2** For *every* state, translating all positions and features leaves both the dynamics and the measurements unchanged. The nominal kinematics never use the position itself, only its rate, and the camera depends on positions only through differences $p_f - p_{wb_i}$. Differentiating these identities at *any* linearization point gives $\Phi_k N_t = N_t$ and $H_k N_t = 0$, or $H_{x,j} N_t + H_{f,j} = 0$ and hence $H_{o,j} N_t = 0$ after projection. The translation columns $N_t = (I, 0, 0, 0, 0, I, 0, \dots)$ contain no estimates at all, so the product telescopes trivially, whatever estimates the individual factors used:

$$H_k \Phi_{k-1} \cdots \Phi_1 N_t = H_k N_t = 0.$$

The yaw column contains $\hat{p}$, $\hat{v}$, $\hat{R}$ and the clone estimates. The $N$ that one factor maps into is then not the $N$ that the next factor annihilates, unless the estimates agree. (The pose measurement of Milestones 6–7 is different: it observes absolute position, so translations are observable there.)

**29.3** The state is $x = (p, \psi, \ell_1, \ell_2) \in \mathbb{R}^7$ and the output $h = (R^\mathsf{T}(\ell_1 - p), R^\mathsf{T}(\ell_2 - p)) \in \mathbb{R}^4$, with $\nabla h_i = \begin{bmatrix} -R^\mathsf{T} & -\Omega h_i & \cdots & R^\mathsf{T} & \cdots \end{bmatrix}$, the $R^\mathsf{T}$ in the columns of $\ell_i$. As before, $L_{f_v} h_i = -e_1$ is constant and $L_{f_\omega} h_i = -\Omega h_i$, whose gradient $-\Omega \nabla h_i$ lies in the row space of $\nabla h_i$; the same holds for all higher derivatives. So $dO$ is the row space of $[\nabla h_1;\ \nabla h_2]$. Its landmark columns form the invertible $\mathrm{blkdiag}(R^\mathsf{T}, R^\mathsf{T})$, so the rank is 4. (Numerically, with the closed-form Lie derivatives, the singular values are 12.2, 3.0, 2.3, 1.7, and then exactly zero three times.) Three directions are unobservable, the same three as with one landmark:

$$N_t = (I_2,\ 0,\ I_2,\ I_2), \qquad N_r = (\Omega p,\ 1,\ \Omega \ell_1,\ \Omega \ell_2),$$

since $\nabla h_i N_r = -R^\mathsf{T} \Omega p - \Omega R^\mathsf{T}(\ell_i - p) + R^\mathsf{T} \Omega \ell_i = 0$ by $R^\mathsf{T} \Omega = \Omega R^\mathsf{T}$. Each new landmark adds two states and two independent outputs, so landmarks never reduce the number of unobservable directions. Only known landmarks do.

**29.4** The measurement depends on the state only through $d = R(\psi)^\mathsf{T}(\ell_j - p)$, so by the chain rule $H_k^{\mathrm{rb}} = J_z(\hat{d}_k)\, H_k$, with $H_k$ the Cartesian Jacobian (29.6) and

$$J_z = \frac{\partial(\|d\|, \mathrm{atan2}(d_y, d_x))}{\partial d} = \begin{bmatrix} d^\mathsf{T}/\rho \\ (\Omega d)^\mathsf{T}/\rho^2 \end{bmatrix}, \qquad \rho = \|d\|, \qquad \det J_z = \frac{1}{\rho} \neq 0.$$

Multiplying Theorem 29.4 on the left by $J_z$:

$$H_k^{\text{rb}}\Phi_{k-1}\cdots\Phi_1 N_t = 0, \qquad H_k^{\text{rb}}\Phi_{k-1}\cdots\Phi_1 N_r = J_z(\hat{d}_k)\,\hat{R}_k^{\mathsf{T}}\Omega\big(D_k + \bar{\ell}_j - \hat{\ell}_j\big).$$

The leak is the Cartesian one premultiplied by an invertible matrix, so it vanishes under exactly the same conditions, and FEJ cures it in the same way. This holds for any measurement of the body-frame landmark position: only the factor $J_z$ changes.

**29.5** Propagate a copy of $N$ alongside $P$: multiply it by each $\Phi_k$ the filter uses and append $J_x N$ when a landmark is initialized (the filter's own augmentation Jacobian). At every update, print $\|HN\|$ for the Jacobian $H$ the filter actually uses. Over five runs of the Figure 29.1 scenario:

| filter | $\max\|HN_t\|$ | $\|HN_r\|$ (median / max) |
|---|---|---|
| standard EKF | 0 | 0.17 / 0.9 |
| FEJ-EKF | 0 | $9\times10^{-16}$ / $4\times10^{-15}$ |
| ideal EKF | 0 | $9\times10^{-16}$ / $4\times10^{-15}$ |

Only the standard EKF violates the condition, and only in the rotation direction, by an amount that tracks the accumulated corrections. One subtlety appeared on the way. If the ideal filter evaluates the landmark-initialization Jacobian with the *noisy* measurement, $\Omega R(\psi)z$ instead of $\Omega(\ell_j - p)$, the landmark enters $N$ at $\ell_j + Rn$ while $H$ uses $\ell_j$. Then $\|HN_r\| \approx 0.12$, the size of the measurement noise, and the "ideal" filter gains a little heading information (its final RMS heading error drops from 2.8° to 2.5°). Every Jacobian that involves a state must use the same linearization point, the augmentation Jacobian included.

**29.6** Each row is separate: minimize $\|d\|^2$ subject to $dN = c$, with $d \in \mathbb{R}^{1\times n}$ and $N \in \mathbb{R}^{n\times m}$ of full column rank. Split $d = d_{\|} + d_{\perp}$ with $d_{\|} = yN^{\mathsf{T}}$ in the row space of $N^{\mathsf{T}}$ and $d_{\perp}N = 0$. The constraint sees only $d_{\|}$: $yN^{\mathsf{T}}N = c$, so $y = c(N^{\mathsf{T}}N)^{-1}$ and $d_{\|} = c(N^{\mathsf{T}}N)^{-1}N^{\mathsf{T}}$ is the same for every feasible $d$. Since $d_{\|}d_{\perp}^{\mathsf{T}} = yN^{\mathsf{T}}d_{\perp}^{\mathsf{T}} = 0$,

$$\|d\|^2 = \|d_{\|}\|^2 + \|d_{\perp}\|^2 \geq \|d_{\|}\|^2,$$

with equality exactly when $d_{\perp} = 0$. The unique minimizer is $d = c(N^{\mathsf{T}}N)^{-1}N^{\mathsf{T}}$, which with $c = -hN$ (for $H$) or $c = n_{k+1} - hN_k$ (for $\Phi$) gives Proposition 29.6.

**29.7** At rest the velocity is zero, so use the pseudo-measurement $z = 0 = v_{wb} + n_{\text{zv}}$ with $R_{\text{zv}} = \sigma_{\text{zv}}^2 I_3$. The residual is $r = 0 - \hat{v}$, and since the velocity error is additive ($v = \hat{v} + \delta v$),

$$H = \begin{bmatrix} 0_3 & I_3 & 0_3 & 0_3 & 0_3 & 0_{3\times 6N} \end{bmatrix}.$$

A companion *zero-rate* update uses $\omega_m = b_g + n_g$ at rest: a direct measurement of the gyro bias, with $H$ selecting the $\delta b_g$ columns. Safety rules:

- apply it only when stillness is certain: accelerometer and gyro variance over a window below thresholds, and negligible feature motion. A hovering drone is not stationary, and a false zero-velocity update is a confident wrong measurement;
- keep $\sigma_{\text{zv}}$ realistic (centimeters per second, to cover vibration);
- apply it at a modest rate, not at every IMU sample. All these updates rest on

one stillness hypothesis, so their errors are not independent, and 200 of them per second would make the filter overconfident.

For EuRoC it applies only before take-off. It bounds velocity and position drift at rest, but adds nothing about yaw.

**29.8** Following [34] and Section 29.4, three kinds of Jacobian need fixed linearization points:

(a) the IMU transition matrix from $t_k$ to $t_{k+1}$, evaluated with the propagated estimates at both ends, $\hat{x}_{k|k-1}$ and $\hat{x}_{k+1|k}$, so that consecutive matrices telescope. This includes the attitude block, which must be $\hat{R}_{k+1|k}^{\mathsf{T}} \hat{R}_{k|k-1}$ instead of $\mathrm{Exp}(-\hat{\omega}\Delta t)$, so that it maps $\hat{R}_{k|k-1}^{\mathsf{T}} e_z$ to $\hat{R}_{k+1|k}^{\mathsf{T}} e_z$;

(b) the camera Jacobians with respect to each clone, evaluated at the clone's *first estimate*, its pose when it was cloned (the propagated estimate at the image time), while the residual uses the current estimate;

(c) the feature Jacobians, evaluated at one estimate of the feature for all of its observations (any single estimate works, because the feature is eliminated).

Storage without allocation: give the clone record a second pose, e.g. `struct Clone { nanoseconds t; Vector3d p, p_fej; Quaterniond q, q_fej; uint64_t id; }` in the fixed-capacity ring buffer of `kMaxClones` entries. The FEJ fields are written once, at cloning, and skipped by injection. Marginalization drops them with the clone. For the IMU, keep one member copy of the previous propagated state $(\hat{p}, \hat{v}, \hat{q})_{k|k-1}$: compute $\Phi_k$ from it and the newly propagated state, then overwrite it with the newly propagated state *before* any update is applied. All of it is fixed-size, so E4 is unaffected. The test is the one of the implementation note: $\|H_k N_k\|$ and $\|\Phi_k N_k - N_{k+1}\|$ at rounding level on a synthetic run.

Chapter 30

# Engineering a Real-Time Estimator in C++20

**In this chapter**

- Know the C++ facts an estimator depends on: stack and heap, object lifetime, and the C++20 features the project uses.
- Understand why a real-time estimator must be deterministic, and how the project's memory tiers achieve it.
- Know how Eigen represents matrices, blocks and expressions, and use fixed-max-size matrices, member workspaces and allocation guards correctly.
- Avoid the Eigen pitfalls that silently corrupt numbers: dangling expression templates and aliasing.
- Understand what the sanitizers check and how, and how a target-based CMake build is organized.
- Design a test strategy in which every test can fail, and a systematic procedure for debugging a diverging filter.

The mathematics of the previous chapters is necessary but not sufficient. An estimator that is mathematically correct can still miss its deadline because of an allocation, produce garbage because of an Eigen expression template, or pass all its tests because the tests cannot fail. This chapter collects the engineering practices that the project encodes in AGENTS.md.

## 30.1 C++ essentials for estimator code

### 30.1.1 Stack, heap and object lifetime

A C++ program keeps its data in two kinds of memory. The *stack* holds the local variables of the functions currently running. Entering a function reserves a block of it by moving a pointer, and leaving the function releases the block by moving the pointer back: the cost is a few instructions, it is the same every time, and the size of each block is fixed at compile time. The *heap* holds objects whose size or lifetime is decided at run time. Obtaining heap memory (`new`, `std::vector` growth, a dynamic-size Eigen matrix) calls the memory allocator, which must find a free block of the right size, may take a lock shared with other threads, and occasionally asks the operating system for more pages. Its cost is usually modest and occasionally large, which is exactly what a real-time loop cannot afford.

Every C++ object has a lifetime that ends at a precisely defined point: a local variable when its scope closes, a member when its owner is destroyed. At that point its destructor runs.

Tying resources (memory, files, locks) to object lifetime is called *RAII* (resource acquisition is initialization): a `std::vector` frees its heap block in its destructor, so it cannot leak. The project uses RAII everywhere and never calls `delete` by hand. The stack is small (typically 1 MB on Windows, 8 MB on Linux), so large matrices belong in class members created once, not in function locals.

### 30.1.2 The C++20 features the project uses

```
inline constexpr int kImuDim = 15;   // compile-time constant, one definition

[[nodiscard]] bool update(const PoseMeasurement& z) noexcept; // result must be used
void ingest(std::span<const ImuSample> samples) noexcept;     // view of contiguous data
```

- `constexpr` values are computed at compile time and can size arrays and Eigen matrices; `inline constexpr` in a header gives one shared definition. Dimensions, indices (AGENTS.md C3) and the $\chi^2$ table are `constexpr`.
- `[[nodiscard]]` makes the compiler warn (with `-Werror`, fail) when a caller ignores the return value: a rejected update or a failed factorization must not be silently dropped.
- `noexcept` promises that a function throws no exception. If one escapes anyway the program terminates, so the promise is only made on the hot path, where errors are reported through return values instead.
- `std::span<const T>` is a non-owning view (a pointer and a length) of contiguous elements. A function taking a span accepts an array, a `std::vector` or part of one without copying and without caring who owns the memory.
- `std::variant<A, B>` holds exactly one of several types, without heap allocation. `std::visit` calls the matching overload:

```
template <class... Ts> struct Overloaded : Ts... { using Ts::operator()...; };
template <class... Ts> Overloaded(Ts...) -> Overloaded<Ts...>;

for (const SensorEvent& event : events) {           // one presorted stream
  std::visit(Overloaded{
      [&](const ImuSample& s)  { filter.propagate(s); },
      [&](const ImageEvent& e) { pipeline.on_image(e); },
  }, event);
}
```

`Overloaded` inherits the call operators of all the lambdas passed to it, so `std::visit` finds the one whose parameter type matches the alternative currently stored. Adding a new event type to the variant without handling it is a compile error, not a silent omission.

## 30.2 Determinism and the memory tiers

A flight controller consumes the estimator's output at a fixed rate. A late estimate is a wrong estimate. The main source of unpredictable latency in C++ is dynamic memory allocation:

`new`, a `std::vector` that grows, a dynamic-size Eigen temporary. The allocator may take locks, search free lists or ask the operating system for pages, with latency that is usually small and occasionally large. The project therefore separates three tiers (AGENTS.md E4).

| Tier | Scope | Rule |
|---|---|---|
| Load | parsing, building event arrays, constructing the filter | allocate freely, before streaming starts |
| Core | `vio_core`, per IMU sample and per update | zero heap allocations |
| Frontend | OpenCV tracking | may allocate, must reuse buffers; allocations are measured and logged |

### 30.2.1 Fixed-max-size matrices

The MSCKF covariance changes size as clones come and go, but never exceeds $15 + 6N_{max}$. Eigen supports exactly this case: a matrix whose *runtime* size is dynamic but whose *maximum* size is a compile-time constant. Its storage is an inline array of the maximum size, so resizing within the bound never allocates.

```
inline constexpr int kMaxClones = 10;                  // decided in M10a
inline constexpr int kMaxDim    = 15 + 6 * kMaxClones;

using CovMatrix = Eigen::Matrix<double, Eigen::Dynamic, Eigen::Dynamic,
                                Eigen::ColMajor, kMaxDim, kMaxDim>;

CovMatrix P;          // inline storage for 75 x 75 doubles, no heap
P.resize(15, 15);     // allowed: within the compile-time maximum
```

Large workspaces ($S$, $K$, stacked $H$, temporaries for $\Phi P$) are class members, created once, rather than function-local variables. Function-local fixed-max matrices would not allocate either, but they would live on the stack, and several of them at once can exceed it (Chapter 25).

### 30.2.2 Proving it: allocation guards

"It shouldn't allocate" is not evidence. The project overrides the global `operator new` in its tests to count allocations (`tests/support/alloc_guard.hpp`), and wraps every core hot-path test with a guard that asserts a count of zero. In debug builds, `EIGEN_RUNTIME_NO_MALLOC` together with `Eigen::internal::set_is_malloc_allowed(false)` makes Eigen itself abort on any internal allocation and reports where it happened. Both mechanisms are needed, because they see different allocations. The guard sees everything that goes through `operator new`: `std::vector` growth, `std::string`, `std::function`, `std::make_unique`. Eigen, however, obtains its heap memory directly from `std::malloc` through its own aligned allocator, so a dynamic `Eigen::MatrixXd` is invisible to the guard. Only Eigen's flag catches it, and only in the `debug-sanitize` preset, where the flag is defined.

## 30.3 Eigen in brief

**The matrix type.** Every dense Eigen matrix is an instance of one class template,

```
Eigen::Matrix<Scalar, Rows, Cols, Options, MaxRows, MaxCols>
```

`Rows` and `Cols` are either compile-time numbers (a *fixed-size* matrix such as `Eigen::Matrix3d`, stored inline with no heap) or `Eigen::Dynamic` (size chosen at run time, normally on the heap, such as `Eigen::MatrixXd`). `MaxRows` and `MaxCols` give a dynamic matrix a compile-time upper bound, which turns its storage into an inline array: the fixed-max-size matrices used below. `Options` chooses the storage order.

**Storage order.** Memory is one-dimensional. A *column-major* matrix (Eigen's default) stores column after column, so entry $(i, j)$ of an $m \times n$ matrix lives at offset $i + jm$; a *row-major* matrix stores row after row, offset $j + in$. Loops are fastest when they walk memory contiguously, so with column-major storage the inner loop should run down a column. Mixing orders is legal but may force copies.

**Blocks.** `P.block(i, j, r, c)`, `P.topLeftCorner(15, 15)`, `v.segment<3>(6)` and their relatives return *views*: they refer to the original storage, copy nothing, and can be assigned to. `P.block<3, 3>(6, 6) = ...` writes the attitude block of $P$ in place. The fixed-size forms (template arguments) let Eigen unroll small operations completely.

**Passing matrices and blocks to functions.** A parameter of type `const Eigen::Matrix3d&` accepts only that exact type. To accept any matrix or block of compatible layout, use `Eigen::Ref<const Eigen::MatrixXd>` (read-only) or `Eigen::Ref<Eigen::MatrixXd>` (writable). A read-only `Ref` quietly makes a temporary copy when the argument's layout is incompatible, and for a dynamic type that copy allocates; a writable `Ref` refuses to compile instead. The quiet copy is an Eigen allocation, so `EIGEN_RUNTIME_NO_MALLOC` catches it and the `operator new` guard does not.

**Wrapping existing memory.** `Eigen::Map<const Eigen::Vector3d> v(ptr)` views three doubles at `ptr` as a vector, without copying. It is the right tool for parsed buffers, and the wrong one for quaternions read from EuRoC: `Eigen::Map<Eigen::Quaterniond>` interprets memory as $(x, y, z, w)$, while the CSV stores $(w, x, y, z)$ (AGENTS.md C2).

**Expression templates.** `A + B` does not compute a matrix. It returns a small object recording "the sum of `A` and `B`". Only when that object is assigned to a matrix does Eigen run a loop, and it fuses the whole expression into it: `D = A + B + C` is one loop with no temporaries. Products are the exception: they are evaluated into a temporary unless told otherwise (below). This design makes Eigen fast, and it is also the source of the `auto` pitfall described next.

**Decompositions.** Linear systems are solved through decomposition objects: `S.llt().solve(B)` (Cholesky, for symmetric positive definite $S$), `.ldlt()` (robust for semi-definite), `.householderQr()` and `.colPivHouseholderQr()` (QR, Chapter 3). A decomposition object owns a copy of the factor; for fixed-max matrices that copy is inline. `Eigen::LLT<Eigen::Ref<Eigen::MatrixXd>> llt(A)` factors `A` *in place*, overwriting

it with the factor and allocating nothing. Symmetric structure can be exploited with `P.selfadjointView<Eigen::Lower>()`, which reads only one triangle.

## 30.4 Eigen pitfalls

**Expression templates and `auto`.** Eigen operations return lightweight *expression* objects that are evaluated lazily, when they are assigned to a matrix. An expression holds the matrices it uses by reference and nested expressions by value. Storing one with `auto` therefore has two dangers. If a referenced matrix is a temporary (made by `.eval()`, or returned by value from a function), the reference dangles. And even if every operand still exists, the computation happens only at the later assignment, with whatever values the operands have then.

```
auto bad = (a + b).eval().transpose(); // refers to the temporary made by eval()
Eigen::RowVector3d x = bad;            // undefined behavior: that temporary is gone
Eigen::RowVector3d good = (a + b).transpose(); // concrete type: evaluated now

auto lazy = A * v;                     // nothing is computed here
A(0, 0) = 10.0;
Eigen::Vector3d y = lazy;              // computed now, with the modified A
```

The rule is simple: never use `auto` with Eigen expressions (AGENTS.md E5). Name the concrete type, or call `.eval()` when a temporary really is wanted. AddressSanitizer reports the dangling case (as a use after scope), but not the stale one, which reads only valid memory (Exercise 30.2).

**Aliasing.** Eigen assumes that the destination of a matrix product may alias its operands and evaluates products into a temporary. With dynamic sizes that temporary allocates. When the destination is known not to alias, `.noalias()` writes directly into it. When it does alias, the temporary is required: write into a member workspace explicitly.

```
tmp_15xN_.noalias() = Phi * P.topRightCorner(15, nc);  // reads P, writes workspace
P.topRightCorner(15, nc) = tmp_15xN_;                   // copy back
P.bottomLeftCorner(nc, 15) = tmp_15xN_.transpose();     // keep symmetry
```

Coefficient-wise operations do not alias-check. `A = A.transpose()` is the classic bug; use `A.transposeInPlace()` or symmetrize with a workspace.

**Passing and alignment.** Pass Eigen objects by `const&` (or `Eigen::Ref` for blocks). Do not add `EIGEN_MAKE_ALIGNED_OPERATOR_NEW`: since C++17, aligned `new` handles over-aligned types. The real alignment hazard is mixing `-march` or alignment-changing flags between translation units or with dependencies, which the project forbids.

**Decompositions without allocation.** Eigen's decompositions normally own their storage. Fixed-max decomposition objects held as members, or the in-place variants that factor a matrix in its own storage, avoid per-call allocation. Whatever the API, verify with `EIGEN_RUNTIME_NO_MALLOC`, which sees Eigen's allocations where the `operator new` guard cannot.

## 30.5 Time and events

```cpp
using Clock = std::chrono::nanoseconds;
struct ImuSample   { Clock t; Eigen::Vector3d gyro, accel; };
struct ImageEvent  { Clock t; int index; };
using SensorEvent = std::variant<ImuSample, ImageEvent /*, PoseMeasurement */>;

// Delta t: subtract in integers, convert only the difference.
const double dt = std::chrono::duration<double>(t1 - t0).count();
```

Absolute time stays in 64-bit integer nanoseconds (Section 3.10). Events form one presorted sequence built at load time, so the streaming loop is a single pass over contiguous memory, dispatched with `std::visit` as in Section 30.1: no priority queue, no allocation, no reordering surprises.

## 30.6 Numerical robustness checklist

- Normalize every quaternion after every multiplicative update (propagation, injection, cloning).
- Symmetrize $P$ after propagation and after every update.
- Use the Joseph form; factor $S$ with Cholesky or LDL$^\mathsf{T}$; treat a failed factorization as an error to report, not to hide.
- Guard every $0/0$ with Taylor branches; use atan2 for angles; handle Log near $\pi$.
- Reject features with non-positive or tiny depth, poor parallax or large reprojection error before linearizing.
- Count and log gate rejections and triangulation failures.
- Never clamp negative eigenvalues of $P$ to hide a problem; find out why they appeared.
- In debug builds, assert finiteness at module boundaries so that a `NaN` is caught where it is born.

## 30.7 Sanitizers

C++ leaves many errors undefined: reading past the end of an array, using memory after freeing it, overflowing a signed integer. Undefined behavior does not mean a crash; it means the compiler may assume it never happens, so the program can produce plausible wrong numbers, behave differently between builds, or fail far from the bug. Sanitizers are compiler-inserted checks that turn these silent errors into immediate, precise reports.

- **AddressSanitizer** (ASan, `-fsanitize=address`) keeps a *shadow memory*, one byte for every eight bytes of program memory, recording which bytes may be accessed. Every heap block, stack variable and global is surrounded by poisoned *redzones*, and freed memory stays poisoned for a while. The compiler inserts a shadow check before every load and store. ASan reports heap, stack and global buffer overflows, use after free,

use after scope and double frees, with stack traces of the access and of the allocation. The cost is roughly a factor of two in speed and three in memory.

- **UndefinedBehaviorSanitizer** (UBSan, `-fsanitize=undefined`) inserts checks for signed integer overflow, out-of-range shifts, integer division by zero, null and misaligned pointer use, invalid `bool` and `enum` values, and floating-point-to-integer conversions that overflow.

By default UBSan prints a message and *continues*, so a test that triggers it still passes. `-fno-sanitize-recover=all` makes every report abort the process, and the test preset sets `UBSAN_OPTIONS=print_stacktrace=1:halt_on_error=1` so the report carries a stack trace (AGENTS.md E3). Frame pointers (`-fno-omit-frame-pointer`) make those traces reliable. On Windows, LeakSanitizer does not exist, so leaks are not detected (RAII makes them rare), and an instrumented executable needs the ASan runtime DLL from `C:\msys64\clang64\bin` on its `PATH`. Sanitizers are a debug-build tool: the `release` preset builds without them, and both presets must pass.

## 30.8 Modern CMake in brief

CMake describes a build as a set of *targets* (libraries and executables) with properties. Modern CMake attaches every setting to a target rather than to global variables, and lets settings propagate along the dependency graph through three keywords: `PRIVATE` (used to build this target only), `INTERFACE` (used only by targets that link to this one) and `PUBLIC` (both). A library's public include directory is `PUBLIC`, because its users include its headers; a warning flag is `PRIVATE`, because it concerns only the library's own code.

```
add_library(vio_warnings INTERFACE)           # carries flags, builds nothing
target_compile_options(vio_warnings INTERFACE -Wall -Wextra -Wconversion -Werror)

add_library(vio_core STATIC src/so3.cpp src/es_ekf.cpp)
target_include_directories(vio_core PUBLIC include)
target_link_libraries(vio_core PUBLIC Eigen3::Eigen PRIVATE vio_warnings)
```

The `vio_warnings` target is how warnings stay off the dependencies (AGENTS.md E3): only project targets link it. Dependencies fetched with `FetchContent` at a pinned tag are declared `SYSTEM`, so their headers are included with `-isystem` and do not trigger the project's warnings. `CMakePresets.json` stores named configurations (generator, compiler, build type, flags, test environment), so that `cmake --preset debug-sanitize`, `cmake --build --preset debug-sanitize` and `ctest --preset debug-sanitize` reproduce exactly the same build on every machine. Catch2's `catch_discover_tests` registers each `TEST_CASE` as a separate CTest test.

## 30.9 Testing

**Key idea: a test must be able to fail**

For every test, ask: would it still pass if I flipped the sign of X, transposed Y, or swapped two blocks? If yes, the test is decoration. Run it once against a deliberately broken implementation to make sure it fails.

The project's test strategy layers several kinds of evidence.

1. **Algebraic unit tests**: identities such as $\mathrm{Log}(\mathrm{Exp}(\phi)) = \phi$ at zero, tiny, generic and near-$\pi$ angles.
2. **Finite-difference Jacobian tests** built on $\boxplus/\boxminus$, at non-trivial states, with tolerances justified in a comment.
3. **Closed-form trajectory tests**: synthetic trajectories with analytic IMU data and convergence-order checks.
4. **Statistical tests**: Monte Carlo covariance checks and NEES/NIS with $\chi^2$ bounds, seeded with `std::mt19937_64`. Because `std::normal_distribution` differs between standard libraries, never hard-code values from one run; test statistical properties.
5. **Invariance tests**: cloning enabled versus disabled must give identical IMU estimates when no visual updates occur.
6. **Resource tests**: allocation guards around every core hot path.
7. **Sanitizers**: ASan and UBSan builds with `-fno-sanitize-recover=all`, so that any report fails the test run (Section 30.7).

## 30.10 Debugging a diverging filter

When the full system misbehaves, resist the urge to tune. Work down the layers instead.

1. Run on **synthetic data** with exactly modeled noise. If it fails there, the bug is in the code.
2. Disable visual updates. Does IMU-only propagation from ground truth behave as Figure 17.1 predicts, with errors inside $3\sigma$?
3. Replace visual updates by **pose updates** (Milestone 6). If those are consistent, the back end is sound.
4. Feed the MSCKF **ground-truth feature tracks** from a synthetic scene. If that works, the problem is in the front end or the calibration.
5. On real data, plot each residual component over time and look for bias, oscillation or outliers.
6. Only then adjust noise parameters, and judge the result on consistency statistics.

## 30.11 Going further

Once the baseline MSCKF runs, natural extensions are First-Estimates Jacobians (Chapter 29); online calibration of the camera-IMU extrinsics and time offset [34, 35]; stereo observations from `cam1`; keeping long-lived features as SLAM landmarks; zero-velocity updates; and evaluation on the harder EuRoC sequences (V1_03, MH_05) and other datasets. Each extension adds states and Jacobians, and each Jacobian gets its derivation and its finite-difference test.

**Key takeaways**

- Heap allocation has unpredictable cost; the stack is cheap but small. Large workspaces are members, created once.
- Determinism requires zero allocation in the core: fixed-max-size matrices, member workspaces, proven by allocation guards and `EIGEN_RUNTIME_NO_MALLOC` (Eigen allocates with `malloc`, which the guard does not see).
- Never use `auto` with Eigen expressions; use `.noalias()` only when there is no aliasing.
- Keep time in integer nanoseconds and process one presorted event stream.
- Sanitizers turn undefined behavior into reports; without `-fno-sanitize-recover=all` UBSan reports do not fail tests.
- Every test must be able to fail; layer algebraic, Jacobian, closed-form, statistical and resource tests.
- Debug by removing layers until the failure disappears, not by tuning.

## Exercises

**30.1** Write a minimal allocation guard by overriding the global `operator new` and `operator delete`, and show that it detects a `std::vector::push_back` beyond capacity but not a fixed-max Eigen `resize`.

**30.2** Construct an example in which `auto` with an Eigen expression produces wrong numbers without crashing. Does AddressSanitizer report it?

**30.3** Measure the time of 10 000 covariance propagation steps with fixed-max and with fully dynamic Eigen matrices, in both build presets. Explain the difference.

**30.4** Take one of your Jacobian tests, break the Jacobian in three different ways, and record which breakages the test detects.

**30.5** Write a function that reads one element past the end of a `std::array` and another that overflows an `int`. Build both presets and record what each sanitizer reports, and what the release build does.

**30.6** Pass a row-major block to a function taking `Eigen::Ref<const Eigen::MatrixXd>` inside an allocation guard. What happens, and what happens if the parameter is a writable `Ref`?

**30.7** Add a third alternative to the `SensorEvent` variant without handling it in the `Overloaded` visitor. Read the compiler error.

## Solutions to the exercises

**30.1** The core of a minimal guard:

```
inline int g_allocations = 0;                  // reset before, check after
void* operator new(std::size_t n) {
  ++g_allocations;
  if (void* p = std::malloc(n)) return p;
  throw std::bad_alloc();
}
void operator delete(void* p) noexcept { std::free(p); }
void operator delete(void* p, std::size_t) noexcept { std::free(p); }
```

Reset the counter immediately before the code under test and read it immediately after, because the test framework allocates too. Measured with clang/libc++:

- four `push_back` calls into a vector with `reserve(4)`: 0 allocations; the fifth: 1 (the reallocation);
- resizing a fixed-max $75 \times 75$ matrix from $15 \times 15$ to $75 \times 75$: 0, because the storage is inline;
- a dynamic `Eigen::MatrixXd(10, 10)`: also 0. This is not because it does not allocate, but because Eigen allocates with `std::malloc` through its own aligned allocator, which never calls `operator new`.

With `EIGEN_RUNTIME_NO_MALLOC` and `set_is_malloc_allowed(false)`, the same `MatrixXd` aborts with Eigen's assertion "heap allocation is forbidden". The guard and the flag are therefore both needed. Since the flag is defined only in the `debug-sanitize` preset, Eigen allocations are caught only there. Defining it for the test targets of both presets would close that gap; it is a design decision to record in `PROGRESS.md`. A complete guard also overrides the aligned forms `operator new(std::size_t, std::align_val_t)`, which the library implements without calling the plain one. The C++ experiments of these solutions are in `scripts/solutions/cpp`, with `build_and_run.ps1` to build and run them in both configurations.

**30.2** Five candidates, each assigned afterwards to a concrete type and built in both presets:

- `auto e = R * (a + b);` gives correct numbers in both builds. The sum is a nested expression, which Eigen stores by value, so nothing dangles.
- `auto e = (a + b).eval().transpose();` prints the right numbers in release, by luck. ASan reports `stack-use-after-scope`.
- `auto e = make().head<2>();`, with `make()` returning a `Vector3d` by value, behaves the same way: right by luck in release, reported by ASan.
- `auto e = (X * 2.0).eval().block(0, 0, 2, 2);` with a dynamic `X` prints garbage ($10^{-311}$ entries) in release without crashing. ASan reports `stack-use-after-scope`.
- `auto e = A * v;` followed by a change to `A` produces the product with the *new* `A` in both builds, and no sanitizer reports anything.

Dangling references are undefined behavior: the optimized build may print the right numbers because the dead temporary's stack slot has not been reused yet, or garbage,

as in the dynamic case. AddressSanitizer reports them reliably, as a read of a variable whose scope has ended. The stale expression is not undefined behavior at all, since every access is to valid memory. The expression is simply evaluated later than the reader assumed, so no sanitizer can report it. Only the rule "no `auto` with Eigen" prevents it.

**30.3** Ten thousand propagation steps of a 75×75 covariance (the 15×15 block with $\Phi P \Phi^{\mathsf{T}} + Q$, the $15 \times 60$ cross block with $\Phi P_{IC}$), per step:

| implementation | release | debug-sanitize |
|---|---|---|
| fixed-max, member workspaces | 3.0 µs | 500 µs |
| dynamic, temporaries in expressions | 3.3 µs | 525 µs |
| dynamic, preallocated workspaces | 3.3 µs | 505 µs |

In release, the arithmetic (about $4 \times 10^4$ flops) dominates. The three small heap allocations per step of the naive dynamic version cost a few hundred nanoseconds, and fixed sizes let Eigen unroll the $15 \times 15$ parts. That gives a 10% difference, not an order of magnitude. The dynamic version with workspaces does not allocate either (it ran with Eigen allocations forbidden). The case for fixed-max matrices is therefore not average speed but the *guarantee*: the storage is inline, its bound is checked, and no forgotten `.noalias()` or temporary can allocate in the hot path. That is what makes the worst case predictable. The sanitizer build is about 170 times slower. At `-O0` none of Eigen's small template functions is inlined, and ASan checks every load and store. Use it to prove correctness (both allocation-free versions ran with `malloc` forbidden), never to measure speed.

**30.4** With the right Jacobian $J_r$ of Chapter 8, tested against central differences of $\mathrm{Log}(\mathrm{Exp}(\phi)^{\mathsf{T}} \mathrm{Exp}(\phi + \delta))$ ($h = 10^{-6}$, so the correct version agrees to $10^{-10}$), the largest error of three broken versions at four test points is:

| breakage | $\phi = 0$ | $\lVert\phi\rVert = 0.05$ | $\lVert\phi\rVert = 0.5$ | $\lVert\phi\rVert = 2.5$ |
|---|---|---|---|---|
| sign of the $[\phi]_\times$ term flipped (this is $J_l$) | 0 | $4 \times 10^{-2}$ | 0.4 | 1.1 |
| second-order term dropped | 0 | $4 \times 10^{-4}$ | $4 \times 10^{-2}$ | 0.65 |
| Taylor branch used below 0.1 rad | 0 | $4 \times 10^{-4}$ | $8 \times 10^{-11}$ | $9 \times 10^{-11}$ |

A test at $\phi = 0$ detects nothing, since every version equals $I$ there. A test at a single generic angle misses the wrong branch threshold. A loose tolerance ($10^{-3}$, say) misses the dropped term at small angles. Hence the rules: several random points spanning the regimes (tiny, inside every branch, generic, near $\pi$), and a tolerance derived from the finite-difference error rather than chosen for comfort.

**30.5** Reading `a[4]` of a `std::array<int, 4>` and computing `INT_MAX + 1`:

- *release*: the read returned 1634890337 (whatever lay next on the stack) and the addition printed −2147483648. No crash and no message. Neither result is guaranteed: both are undefined behavior, and the optimizer may, for example, fold `x + 1 > x` to `true`;
- *debug-sanitize*: ASan stops at the read with `stack-buffer-overflow ... READ of size 4` and the file and line of the access. UBSan stops at the addition with `runtime`

`error: signed integer overflow: 2147483647 + 1 cannot be represented in type 'int'`. With `-fno-sanitize-recover=all` both abort, so a test that triggers them fails.

Note that `std::array::operator[]` does not check bounds. ASan caught the read because the array lives on the stack between redzones. Compiling with libc++'s hardening (`-D_LIBCPP_HARDENING_MODE=_LIBCPP_HARDENING_MODE_FAST`) adds a cheap bounds check that traps even in an optimized build: the process stopped with an illegal-instruction exception.

**30.6** Binding a $3 \times 3$ block of a row-major matrix to `Eigen::Ref<const Eigen::MatrixXd>` compiles and gives the right result, but `Ref` cannot describe a row-major block with column-major strides, so it copies the block into an internal `MatrixXd`. The operator-new guard counts 0 allocations, because the copy is an Eigen allocation through `malloc`. With `set_is_malloc_allowed(false)` the call aborts with Eigen's assertion. A column-major block binds without any copy (it passes with allocations forbidden). With a writable `Eigen::Ref<Eigen::MatrixXd>`, the call does not compile: `no matching function for call to 'scale'`. A writable reference cannot silently redirect writes into a copy. Keep one storage order throughout the core (column-major, Eigen's default), or write the `Ref` type for the layout actually passed.

**30.7** With `PoseEvent` added to the variant and no lambda for it, libc++ stops with

```
error: static assertion failed due to requirement
  'is_invocable_v<Overloaded<...>, const PoseEvent &>':
  std::visit requires the visitor to be exhaustive.
```

This is followed by notes leading back to the `std::visit` call. Every dispatch site that forgot the new event type fails to compile, which is the point of the design. The one way to defeat it is a catch-all generic lambda, `[](const auto&) {}`, which silently swallows new alternatives. Do not put one in the event dispatch.

# Appendices

Appendix A

# Notation and Conventions

This appendix restates the frozen conventions of `AGENTS.md` in one place, together with the notation of these notes.

## Frames and transformations

| Symbol | Code name | Meaning |
|---|---|---|
| $W$ | — | world frame: fixed, gravity-aligned, $z$ up; EuRoC `R` |
| $B$ | — | body frame = IMU `imu0`; EuRoC `S` in `imu0` |
| $C$ | — | left camera `cam0`: $z$ optical axis, $x$ right, $y$ down |
| $R_{wb}$, $q_{wb}$ | `R_wb`, `q_wb` | attitude, maps body to world: $v_w = R_{wb} v_b$ |
| $p_{wb}$ | `p_wb` | position of $B$'s origin in $W$ |
| $v_{wb}$ | `v_wb` | velocity of $B$ relative to $W$, expressed in $W$ |
| $T_{bc} = (R_{bc}, p_{bc})$ | `T_bc` | camera-to-body: $p_b = R_{bc} p_c + p_{bc}$; EuRoC `T_BS` of `cam0` |
| $g_w$ | — | gravity, $[0, 0, -9.81]^\mathsf{T}$ m/s$^2$ |

Naming rule: `<quantity>_<to><from>`; adjacent subscripts of a product must match ($R_{wb} R_{bc} = R_{wc}$).

## State, error state and noise

| Error index | Block | Definition |
|---|---|---|
| 0–2 | $\delta p$ | $p = \hat{p} + \delta p$ (world) |
| 3–5 | $\delta v$ | $v = \hat{v} + \delta v$ (world) |
| 6–8 | $\delta\theta$ | $q = \hat{q} \otimes \mathrm{Exp}_q(\delta\theta)$ (body, local) |
| 9–11 | $\delta b_a$ | $b_a = \hat{b}_a + \delta b_a$ |
| 12–14 | $\delta b_g$ | $b_g = \hat{b}_g + \delta b_g$ |
| $15 + 6i \ldots$ | $\delta p_i$ | clone $i$ position |
| $18 + 6i \ldots$ | $\delta\theta_i$ | clone $i$ attitude (local) |

| Noise index | Block |
|---|---|
| 0–2 | $n_a$ |
| 3–5 | $n_g$ |
| 6–8 | $n_{b_a}$ |
| 9–11 | $n_{b_g}$ |

## Operators and symbols

| Symbol | Meaning |
|---|---|
| $a^\mathsf{T}$, $A^{-1}$, $A^{-\mathsf{T}}$ | transpose, inverse, inverse transpose |
| $[a]_\times$, $a^\wedge$ | skew-symmetric (cross-product) matrix of $a \in \mathbb{R}^3$ |
| $(\cdot)^\vee$ | inverse of the hat map |
| $\otimes$ | Hamilton quaternion product |
| $q^*$ | quaternion conjugate |
| exp, log | matrix exponential and logarithm |
| Exp, Log | $\mathbb{R}^3 \leftrightarrow$ SO(3); $\mathrm{Exp}_q$, $\mathrm{Log}_q$ for unit quaternions |
| $J_r$, $J_l$ | right and left Jacobians of SO(3) |
| $\boxplus$, $\boxminus$ | retraction and local difference (AGENTS.md C4) |
| $\hat{x}$, $\delta x$, $x$ | nominal (estimated), error, and true state |
| $P$, $Q_c$, $Q_d$, $R_z$ | error covariance, continuous and discrete process noise, measurement noise |
| $F_c$, $G_c$, $\Phi$ | continuous error dynamics, noise input matrix, discrete transition |
| $H$, $S$, $K$, $r$ | measurement Jacobian, innovation covariance, gain, residual |
| $\mathcal{N}(\mu, \Sigma)$ | Gaussian distribution |
| $\chi^2_k$, $\chi^2_p(k)$ | chi-squared distribution with $k$ DOF; its quantile at probability $p$ |
| $\pi(\cdot)$ | pinhole projection $(X/Z, Y/Z)$ |
| $u$, $\varepsilon_{\mathrm{mach}}$ | unit roundoff $2^{-53}$, machine epsilon $2^{-52}$ |

## Abbreviations

| | |
|---|---|
| ATE / RPE | absolute trajectory error / relative pose error |
| BCH | Baker–Campbell–Hausdorff formula |
| DOF | degrees of freedom |
| EKF / ESKF | extended / error-state Kalman filter |
| FEJ | first-estimates Jacobians |
| IMU | inertial measurement unit |
| KLT / LK | Kanade–Lucas–Tomasi tracker / Lucas–Kanade optical flow |
| MSCKF | multi-state constraint Kalman filter |
| NEES / NIS | normalized estimation error squared / normalized innovation squared |
| PSD / PD | positive semi-definite / positive definite |
| RANSAC | random sample consensus |
| SLAM | simultaneous localization and mapping |
| VIO | visual-inertial odometry |

Appendix B

# Formula Sheet

Every formula below follows the project conventions (Hamilton quaternions, local perturbations) and was verified numerically. Let $\theta = \|\phi\|$.

## Cross products

$$[a]_\times b = a \times b = -[b]_\times a, \qquad [a]_\times^\mathsf{T} = -[a]_\times, \qquad [a]_\times^2 = aa^\mathsf{T} - \|a\|^2 I, \qquad [a]_\times^3 = -\|a\|^2 [a]_\times,$$
$$[a]_\times [b]_\times = ba^\mathsf{T} - (a^\mathsf{T} b) I, \qquad [a \times b]_\times = [a]_\times [b]_\times - [b]_\times [a]_\times, \qquad [Ra]_\times = R[a]_\times R^\mathsf{T}.$$

## Exponential and logarithm

$$\mathrm{Exp}(\phi) = I + \frac{\sin\theta}{\theta}[\phi]_\times + \frac{1-\cos\theta}{\theta^2}[\phi]_\times^2, \qquad \mathrm{Exp}_q(\phi) = \left[\cos\tfrac{\theta}{2},\ \tfrac{\sin(\theta/2)}{\theta}\phi\right],$$
$$\theta = \mathrm{atan2}\left(\tfrac{1}{2}\|(R - R^\mathsf{T})^\vee\|,\ \tfrac{1}{2}(\mathrm{tr}\, R - 1)\right), \qquad \mathrm{Log}(R) = \frac{\theta}{2\sin\theta}(R - R^\mathsf{T})^\vee \quad (0 < \theta < \pi),$$
$$\text{near } \pi:\ uu^\mathsf{T} = \frac{\frac{1}{2}(R + R^\mathsf{T}) - \cos\theta\, I}{1 - \cos\theta}, \qquad \mathrm{Log}_q(q) = 2\,\mathrm{atan2}(\|v\|, w)\frac{v}{\|v\|} \ \text{ after } w \geq 0.$$

## Coefficient functions and their series

| Function | Closed form | Series |
|---|---|---|
| $A(\theta)$ | $\sin\theta/\theta$ | $1 - \theta^2/6 + \theta^4/120$ |
| $B(\theta)$ | $(1-\cos\theta)/\theta^2$ | $1/2 - \theta^2/24 + \theta^4/720$ |
| $C(\theta)$ | $(\theta - \sin\theta)/\theta^3$ | $1/6 - \theta^2/120 + \theta^4/5040$ |
| $D(\theta)$ | $1/\theta^2 - \cot(\theta/2)/(2\theta)$ | $1/12 + \theta^2/720 + \theta^4/30240$ |
| $\cos(\theta/2)$ | | $1 - \theta^2/8 + \theta^4/384$ |
| $\sin(\theta/2)/\theta$ | | $1/2 - \theta^2/48 + \theta^4/3840$ |
| $\theta/\sin\theta$ | | $1 + \theta^2/6 + 7\theta^4/360$ |

## Jacobians of SO(3)

$$J_r(\phi) = I - B\,[\phi]_\times + C\,[\phi]_\times^2, \qquad J_r^{-1}(\phi) = I + \tfrac{1}{2}[\phi]_\times + D\,[\phi]_\times^2,$$
$$J_l(\phi) = J_r(-\phi) = J_r(\phi)^\mathsf{T} = \mathrm{Exp}(\phi)J_r(\phi), \qquad J_r(\phi) = \int_0^1 \mathrm{Exp}(-s\phi)\,\mathrm{d}s,$$
$$\mathrm{Exp}(\phi+\delta) \approx \mathrm{Exp}(\phi)\,\mathrm{Exp}(J_r(\phi)\delta), \qquad \mathrm{Log}(\mathrm{Exp}(\phi)\,\mathrm{Exp}(\delta)) \approx \phi + J_r^{-1}(\phi)\delta,$$
$$R\,\mathrm{Exp}(\phi)R^\mathsf{T} = \mathrm{Exp}(R\phi), \qquad \mathrm{Log}(\mathrm{Exp}(a)\,\mathrm{Exp}(b)) = a + b + \tfrac{1}{2}a \times b + \cdots$$

## Elementary Jacobians (local perturbation $R\,\mathrm{Exp}(\delta\theta)$)

| | | | |
|---|---|---|---|
| $Rv$ | $-R[v]_\times$ | $R^{-1}$ | $-R$ |
| $R^\mathsf{T}v$ | $[R^\mathsf{T}v]_\times$ | $R_1R_2$ | $R_2^\mathsf{T}$ (w.r.t. $R_1$), $I$ (w.r.t. $R_2$) |
| $\mathrm{Exp}(\phi)$ | $J_r(\phi)$ | $\mathrm{Log}(R)$ | $J_r^{-1}(\mathrm{Log}\,R)$ |

## Quaternions

$$p \otimes q = \left[p_w q_w - p_v^\mathsf{T} q_v,\ \ p_w q_v + q_w p_v + p_v \times q_v\right], \qquad R(q) = (w^2 - v^\mathsf{T}v)I + 2vv^\mathsf{T} + 2w[v]_\times,$$
$$\dot{q} = \tfrac{1}{2}q \otimes [0, \omega_b], \qquad \dot{R} = R[\omega_b]_\times, \qquad R(p \otimes q) = R(p)R(q).$$

## Linear algebra and least squares

$$(A + UCV)^{-1} = A^{-1} - A^{-1}U\left(C^{-1} + VA^{-1}U\right)^{-1}VA^{-1} \quad \text{(Woodbury)},$$
$$\begin{bmatrix} A & B \\ C & D \end{bmatrix}^{-1} : \text{ Schur complement } S_A = D - CA^{-1}B,$$
$$\hat{x}_{\mathrm{LS}} = (A^\mathsf{T}A)^{-1}A^\mathsf{T}b = R^{-1}Q_1^\mathsf{T}b \ \ (A = Q_1R),$$
$$\mathrm{null}(A^\mathsf{T}) = \mathrm{range}(Q_2) \ \left(A = [Q_1\ Q_2]\begin{bmatrix} R \\ 0 \end{bmatrix}\right), \qquad \kappa_2(A) = \sigma_{\max}/\sigma_{\min},$$
$$\min_{\|x\|=1} \|Ax\| = \sigma_{\min}, \text{ attained at the right singular vector of } \sigma_{\min}.$$

## Gaussians

$$\mathcal{N}(x;\mu,\Sigma) = \frac{\exp\left(-\frac{1}{2}(x-\mu)^\mathsf{T}\Sigma^{-1}(x-\mu)\right)}{\sqrt{(2\pi)^n \det\Sigma}}, \qquad Ax + b \sim \mathcal{N}(A\mu + b,\ A\Sigma A^\mathsf{T}),$$
$$\mu_{a|b} = \mu_a + \Sigma_{ab}\Sigma_{bb}^{-1}(b - \mu_b), \qquad \Sigma_{a|b} = \Sigma_{aa} - \Sigma_{ab}\Sigma_{bb}^{-1}\Sigma_{ba},$$
$$(x-\mu)^\mathsf{T}\Sigma^{-1}(x-\mu) \sim \chi_n^2, \qquad \text{fusion: } \Sigma^{-1} = \Sigma_1^{-1} + \Sigma_2^{-1},\ \ \Sigma^{-1}\mu = \Sigma_1^{-1}\mu_1 + \Sigma_2^{-1}\mu_2.$$

## Random processes and discretization

$$\dot{P} = FP + PF^\mathsf{T} + GQ_cG^\mathsf{T} \quad \text{(Lyapunov)}, \qquad Q_d = \int_0^{\Delta t} e^{Fs} G Q_c G^\mathsf{T} e^{F^\mathsf{T} s}\, \mathrm{d}s,$$

$$\exp\!\left(\begin{bmatrix} -F & GQ_cG^\mathsf{T} \\ 0 & F^\mathsf{T} \end{bmatrix} \Delta t\right) = \begin{bmatrix} C_{11} & C_{12} \\ 0 & C_{22} \end{bmatrix} : \quad \Phi = C_{22}^\mathsf{T}, \; Q_d = \Phi C_{12} \quad \text{(Van Loan)}.$$

## Kalman filter

$$P \leftarrow \Phi P \Phi^\mathsf{T} + Q_d, \qquad \Phi \approx I + F_c \Delta t, \qquad Q_d \approx G_c Q_c G_c^\mathsf{T} \Delta t,$$

$$r = z \boxminus h(\hat{x}), \quad H = \tfrac{\partial}{\partial \delta x}\left[h(\hat{x} \boxplus \delta x) \boxminus h(\hat{x})\right]_0, \quad S = HPH^\mathsf{T} + R_z, \quad K = PH^\mathsf{T} S^{-1},$$

$$P \leftarrow (I - KH)P(I - KH)^\mathsf{T} + KR_zK^\mathsf{T}, \qquad \hat{x} \leftarrow \hat{x} \boxplus Kr, \qquad P \leftarrow GPG^\mathsf{T}, \; G_\theta = I - \tfrac{1}{2}[\delta\hat{\theta}]_\times.$$

## Unscented transform

$$\lambda = \alpha^2(n + \kappa) - n, \qquad \chi_0 = \mu, \quad \chi_i, \chi_{n+i} = \mu \pm \sqrt{n + \lambda}\, \ell_i \;\; (P = LL^\mathsf{T}),$$

$$W_0^{(m)} = \frac{\lambda}{n + \lambda}, \quad W_0^{(c)} = \frac{\lambda}{n + \lambda} + 1 - \alpha^2 + \beta, \quad W_i^{(m)} = W_i^{(c)} = \frac{1}{2(n + \lambda)}.$$

## Nonlinear least squares

$$(J^\mathsf{T} W J + \lambda I)\, \delta = -J^\mathsf{T} W r, \qquad x \leftarrow x \boxplus \delta,$$

$$\lambda = 0\text{: Gauss–Newton}, \qquad \lambda > 0\text{: Levenberg–Marquardt},$$

$$\text{Huber weight } w(s) = \min(1, c/s), \qquad \text{Cauchy weight } w(s) = 1/(1 + s^2/c^2),$$

$$\begin{bmatrix} A & B \\ B^\mathsf{T} & C \end{bmatrix} \begin{bmatrix} \delta c \\ \delta l \end{bmatrix} = \begin{bmatrix} g_c \\ g_l \end{bmatrix} \;\Rightarrow\; (A - BC^{-1}B^\mathsf{T})\, \delta c = g_c - BC^{-1} g_l \;\; \text{(reduced camera system)}.$$

## Strapdown propagation with constant inputs ($\phi = \hat{\omega}\Delta t$)

$$R_{k+1} = R_k \operatorname{Exp}(\phi), \qquad v_{k+1} = v_k + g\Delta t + R_k \Delta t J_l(\phi)\hat{a},$$

$$p_{k+1} = p_k + v_k \Delta t + \tfrac{1}{2} g \Delta t^2 + R_k \Delta t^2 N(\phi)\hat{a},$$

$$N(\phi) = \tfrac{1}{2} I + \frac{\theta - \sin\theta}{\theta^3}[\phi]_\times + \frac{\theta^2/2 + \cos\theta - 1}{\theta^4}[\phi]_\times^2.$$

Bortz equation and the two-sample coning correction (increments $\alpha_1, \alpha_2$ over the two halves of a step):

$$\dot{\phi} = J_r^{-1}(\phi)\,\omega = \omega + \tfrac{1}{2}\phi \times \omega + D(\theta)\,\phi \times (\phi \times \omega), \qquad \phi \approx \alpha_1 + \alpha_2 + \tfrac{2}{3}\,\alpha_1 \times \alpha_2.$$

## Noise

$$\sigma_d = \sigma/\sqrt{\Delta t} \ \text{(white, per sample)}, \qquad \sigma_{b,d} = \sigma_b\sqrt{\Delta t} \ \text{(random walk, per step)},$$
$$\text{Var}(m\text{-fold integral of white noise}) = \sigma^2 \frac{t^{2m-1}}{(2m-1)((m-1)!)^2},$$
$$1\,^\circ/\sqrt{\text{h}} = 2.909 \times 10^{-4}\ \text{rad/s}/\sqrt{\text{Hz}}.$$

## Consistency and alignment

$$\epsilon = e^\mathsf{T} P^{-1} e \sim \chi^2_n \ \text{(NEES)}, \qquad \nu = r^\mathsf{T} S^{-1} r \sim \chi^2_m \ \text{(NIS)},$$
$$\bar{\epsilon} \in \left[\frac{\chi^2_{0.025}(Nn)}{N},\ \frac{\chi^2_{0.975}(Nn)}{N}\right] \ \text{(average over } N \text{ runs, 95\%)},$$
$$\Sigma_{ab} = \tfrac{1}{N}\textstyle\sum_i a_i b_i^\mathsf{T} = UDV^\mathsf{T}: \quad R^\star = U\,\text{diag}(1, 1, \det(UV^\mathsf{T}))V^\mathsf{T}, \quad t^\star = \mu - R^\star\hat{\mu} \quad \text{(Umeyama)}.$$

## Geometry

$$\tilde{x}_2^\mathsf{T}[t]_\times R\tilde{x}_1 = 0, \qquad \frac{\partial \pi}{\partial p_c} = \frac{1}{Z}\begin{bmatrix} 1 & 0 & -X/Z \\ 0 & 1 & -Y/Z \end{bmatrix},$$
$$\sigma_Z \approx \sqrt{2}\frac{Z^2}{b}\sigma_{uv}, \qquad N_{\text{RANSAC}} = \frac{\log(1-p)}{\log(1-w^s)}.$$

## MSCKF

$$r_j \approx H_{x,j}\,\delta x + H_{f,j}\,\delta p_f + n_j, \qquad A_j^\mathsf{T} H_{f,j} = 0,\ \ A_j^\mathsf{T} A_j = I,$$
$$r_{o,j} = A_j^\mathsf{T} r_j, \quad H_{o,j} = A_j^\mathsf{T} H_{x,j}, \quad \text{Cov}(A_j^\mathsf{T} n_j) = \sigma^2 I,$$
$$\dim r_{o,j} = 2M - 3 \ \text{(space)}, \ \ M - 2 \ \text{(plane)},$$
$$\text{gate: } r_{o,j}^\mathsf{T}(H_{o,j} P H_{o,j}^\mathsf{T} + \sigma^2 I)^{-1} r_{o,j} < \chi^2_{0.95}(\dim r_{o,j}),$$
$$H_o = Q_1 T_H \implies (r_n, H_n) = (Q_1^\mathsf{T} r_o, T_H) \ \text{(compression)},$$
$$P \leftarrow JPJ^\mathsf{T}, \ \ J = \begin{bmatrix} I \\ J_g \end{bmatrix} \ \text{(augmentation)}.$$

## Planar models

$$\Omega = \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}, \qquad R(\psi) = \cos\psi\, I + \sin\psi\, \Omega, \qquad R\Omega = \Omega R,$$

$$R(\psi+\delta)^{\mathsf{T}} \approx (I - \delta\,\Omega) R(\psi)^{\mathsf{T}}, \qquad z = y/x: \quad J_\pi = \tfrac{1}{x}\begin{bmatrix} -z & 1 \end{bmatrix},$$

$$\frac{\partial z}{\partial \delta p_i} = -J_\pi R_i^{\mathsf{T}}, \qquad \frac{\partial z}{\partial \delta \psi_i} = -(1+z^2), \qquad \frac{\partial z}{\partial p_f} = J_\pi R_i^{\mathsf{T}},$$

$$\Phi_k = \begin{bmatrix} I & \Omega(\hat{p}_{k+1} - \hat{p}_k) \\ 0 & 1 \end{bmatrix}, \qquad N = \begin{bmatrix} \begin{bmatrix} I_2 \\ 0 \\ I_2 \\ \vdots \end{bmatrix} & \begin{bmatrix} \Omega\hat{p} \\ 1 \\ \Omega\hat{p}_1 \\ \vdots \end{bmatrix} \end{bmatrix}.$$

## Observability

$$\mathcal{O} = \begin{bmatrix} H_1 \\ H_2\Phi_1 \\ \vdots \\ H_k\Phi_{k-1}\cdots\Phi_1 \end{bmatrix}, \qquad L_f\varphi = \nabla\varphi \cdot f,$$

$$N_{\text{yaw}} = \big( -[\hat{p}]_\times e_z,\ -[\hat{v}]_\times e_z,\ \hat{R}^{\mathsf{T}} e_z,\ 0,\ 0,\ -[\hat{p}_i]_\times e_z,\ \hat{R}_i^{\mathsf{T}} e_z \big),$$

$$H^* = H\big(I - N(N^{\mathsf{T}}N)^{-1}N^{\mathsf{T}}\big), \qquad \Phi^* = \Phi + (N_{k+1} - \Phi N_k)(N_k^{\mathsf{T}}N_k)^{-1}N_k^{\mathsf{T}} \quad \text{(OC-EKF)}.$$

Appendix C

# Statistical and Numerical Tables

The tables are generated by `scripts/make_tables.py` with SciPy, so they can be regenerated or extended. The project's `constexpr` $\chi^2$ table (AGENTS.md F3) should be generated the same way, offline, rather than typed by hand.

## Quantiles of the $\chi^2$ distribution

$\chi^2_p(k)$ is the value below which a $\chi^2_k$ variable falls with probability $p$. Gates use $\chi^2_{0.95}$ or $\chi^2_{0.99}$; two-sided 95% intervals use $\chi^2_{0.025}$ and $\chi^2_{0.975}$. For other probability levels, rerun the script. An MSCKF feature with $M$ observations has $k = 2M - 3$.

| $k$ | $\chi^2_{0.025}$ | $\chi^2_{0.95}$ | $\chi^2_{0.975}$ | $\chi^2_{0.99}$ | $k$ | $\chi^2_{0.025}$ | $\chi^2_{0.95}$ | $\chi^2_{0.975}$ | $\chi^2_{0.99}$ |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 0.001 | 3.841 | 5.024 | 6.635 | 26 | 13.844 | 38.885 | 41.923 | 45.642 |
| 2 | 0.051 | 5.991 | 7.378 | 9.210 | 27 | 14.573 | 40.113 | 43.195 | 46.963 |
| 3 | 0.216 | 7.815 | 9.348 | 11.345 | 28 | 15.308 | 41.337 | 44.461 | 48.278 |
| 4 | 0.484 | 9.488 | 11.143 | 13.277 | 29 | 16.047 | 42.557 | 45.722 | 49.588 |
| 5 | 0.831 | 11.070 | 12.833 | 15.086 | 30 | 16.791 | 43.773 | 46.979 | 50.892 |
| 6 | 1.237 | 12.592 | 14.449 | 16.812 | 31 | 17.539 | 44.985 | 48.232 | 52.191 |
| 7 | 1.690 | 14.067 | 16.013 | 18.475 | 32 | 18.291 | 46.194 | 49.480 | 53.486 |
| 8 | 2.180 | 15.507 | 17.535 | 20.090 | 33 | 19.047 | 47.400 | 50.725 | 54.776 |
| 9 | 2.700 | 16.919 | 19.023 | 21.666 | 34 | 19.806 | 48.602 | 51.966 | 56.061 |
| 10 | 3.247 | 18.307 | 20.483 | 23.209 | 35 | 20.569 | 49.802 | 53.203 | 57.342 |
| 11 | 3.816 | 19.675 | 21.920 | 24.725 | 36 | 21.336 | 50.998 | 54.437 | 58.619 |
| 12 | 4.404 | 21.026 | 23.337 | 26.217 | 37 | 22.106 | 52.192 | 55.668 | 59.893 |
| 13 | 5.009 | 22.362 | 24.736 | 27.688 | 38 | 22.878 | 53.384 | 56.896 | 61.162 |
| 14 | 5.629 | 23.685 | 26.119 | 29.141 | 39 | 23.654 | 54.572 | 58.120 | 62.428 |
| 15 | 6.262 | 24.996 | 27.488 | 30.578 | 40 | 24.433 | 55.758 | 59.342 | 63.691 |
| 16 | 6.908 | 26.296 | 28.845 | 32.000 | 45 | 28.366 | 61.656 | 65.410 | 69.957 |
| 17 | 7.564 | 27.587 | 30.191 | 33.409 | 50 | 32.357 | 67.505 | 71.420 | 76.154 |
| 18 | 8.231 | 28.869 | 31.526 | 34.805 | 60 | 40.482 | 79.082 | 83.298 | 88.379 |
| 19 | 8.907 | 30.144 | 32.852 | 36.191 | 75 | 52.942 | 96.217 | 100.839 | 106.393 |
| 20 | 9.591 | 31.410 | 34.170 | 37.566 | 100 | 74.222 | 124.342 | 129.561 | 135.807 |
| 21 | 10.283 | 32.671 | 35.479 | 38.932 | 150 | 117.985 | 179.581 | 185.800 | 193.208 |
| 22 | 10.982 | 33.924 | 36.781 | 40.289 | 200 | 162.728 | 233.994 | 241.058 | 249.445 |
| 23 | 11.689 | 35.172 | 38.076 | 41.638 | 300 | 253.912 | 341.395 | 349.874 | 359.906 |
| 24 | 12.401 | 36.415 | 39.364 | 42.980 | 450 | 393.118 | 500.456 | 510.670 | 522.717 |
| 25 | 13.120 | 37.652 | 40.646 | 44.314 | 600 | 534.019 | 658.094 | 669.769 | 683.516 |

## Average NEES acceptance intervals

Two-sided 95% interval $\left[\chi^2_{0.025}(Nn)/N,\ \chi^2_{0.975}(Nn)/N\right]$ for the average NEES of an $n$-dimensional error over $N$ independent Monte Carlo runs (Chapter 19). The same intervals apply to the time-average of $N$ independent NIS values of dimension $n$.

| $n \backslash N$ | 1 | 10 | 25 | 50 | 100 | 200 |
|---|---|---|---|---|---|---|
| 1 | [0.00, 5.02] | [0.32, 2.05] | [0.52, 1.63] | [0.65, 1.43] | [0.74, 1.30] | [0.81, 1.21] |
| 2 | [0.05, 7.38] | [0.96, 3.42] | [1.29, 2.86] | [1.48, 2.59] | [1.63, 2.41] | [1.73, 2.29] |
| 3 | [0.22, 9.35] | [1.68, 4.70] | [2.12, 4.03] | [2.36, 3.72] | [2.54, 3.50] | [2.67, 3.35] |
| 6 | [1.24, 14.45] | [4.05, 8.33] | [4.72, 7.43] | [5.08, 7.00] | [5.34, 6.70] | [5.53, 6.49] |
| 9 | [2.70, 19.02] | [6.56, 11.81] | [7.41, 10.74] | [7.86, 10.21] | [8.19, 9.85] | [8.42, 9.60] |
| 15 | [6.26, 27.49] | [11.80, 18.58] | [12.93, 17.22] | [13.52, 16.56] | [13.95, 16.09] | [14.25, 15.77] |

## Monte Carlo variance ratio

If $M$ runs produce a sample variance $s^2$ of an error whose true variance is $\sigma^2$, then $s^2/\sigma^2 \sim \chi^2_{M-1}/(M-1)$. The 95% intervals below are the acceptance bounds for a covariance-propagation check (Milestone 5).

| runs $M$ | lower bound | upper bound |
|---|---|---|
| 50 | 0.644 | 1.433 |
| 100 | 0.741 | 1.297 |
| 200 | 0.813 | 1.206 |
| 500 | 0.880 | 1.128 |
| 1000 | 0.914 | 1.090 |
| 2000 | 0.939 | 1.063 |

## RANSAC iterations

Number of iterations $N = \lceil \log(1-p) / \log(1-w^s) \rceil$ for confidence $p = 0.99$, minimal sample size $s$ and inlier ratio $w$.

| $s \backslash w$ | 0.9 | 0.8 | 0.7 | 0.6 | 0.5 | 0.4 | 0.3 |
|---|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 6 | 7 | 10 | 13 |
| 2 | 3 | 5 | 7 | 11 | 17 | 27 | 49 |
| 3 | 4 | 7 | 11 | 19 | 35 | 70 | 169 |
| 5 | 6 | 12 | 26 | 57 | 146 | 448 | 1893 |
| 7 | 8 | 20 | 54 | 163 | 588 | 2809 | 21055 |
| 8 | 9 | 26 | 78 | 272 | 1177 | 7025 | 70188 |

Appendix D

# The EuRoC MAV Dataset

The EuRoC MAV dataset [8] was recorded with an AscTec Firefly hexacopter carrying a VI-Sensor: two global-shutter MT9V034 cameras ($752 \times 480$, 20 Hz) and an ADIS16448 MEMS IMU (200 Hz), hardware time-synchronized and calibrated with Kalibr. The values below are those of the published calibration files; check them against your copy.

## Directory layout

The project keeps sequences under `data/<sequence>/mav0/` (git-ignored). Each sequence contains:

| Path | Content |
|---|---|
| `imu0/data.csv` | `timestamp [ns], w_x, w_y, w_z [rad/s], a_x, a_y, a_z [m/s²]`: $\omega_m$, $a_m$ in $B$ |
| `imu0/sensor.yaml` | IMU noise densities (continuous time), rate, `T_BS` (identity for the IMU) |
| `cam0/data.csv` | `timestamp [ns], filename` |
| `cam0/data/` | PNG images named by timestamp |
| `cam0/sensor.yaml` | `T_BS` (row-major $4 \times 4$), `intrinsics`, `distortion_coefficients`, resolution, rate |
| `cam1/` | right camera (unused; stereo is a stretch goal) |
| `state_groundtruth_estimate0/data.csv` | `timestamp, p_RS_R (3), q_RS (w,x,y,z), v_RS_R (3), b_w_RS_S (3), b_a_RS_S (3)` |

**Pitfall: ground-truth column order**

In the ground-truth file the quaternion is stored $w$ first, and the *gyroscope* bias precedes the *accelerometer* bias. The file starts later than the IMU file, and its velocities and biases come from the dataset authors' own estimator that fused the tracking-system data with the IMU, so they are reference values, not perfect truth. The project maps the columns to $p_{wb}, q_{wb}, v_{wb}, b_g, b_a$ (AGENTS.md C7).

## IMU parameters (`imu0/sensor.yaml`)

| Key | Value | Units |
|---|---|---|
| `gyroscope_noise_density` | $1.6968 \times 10^{-4}$ | $\mathrm{rad/s}/\sqrt{\mathrm{Hz}}$ |
| `gyroscope_random_walk` | $1.9393 \times 10^{-5}$ | $\mathrm{rad/s^2}/\sqrt{\mathrm{Hz}}$ |
| `accelerometer_noise_density` | $2.0 \times 10^{-3}$ | $\mathrm{m/s^2}/\sqrt{\mathrm{Hz}}$ |
| `accelerometer_random_walk` | $3.0 \times 10^{-3}$ | $\mathrm{m/s^3}/\sqrt{\mathrm{Hz}}$ |
| `rate_hz` | 200 | Hz |

## Camera parameters (`cam0/sensor.yaml`)

| | |
|---|---|
| `intrinsics` $[f_u, f_v, c_u, c_v]$ | $[458.654,\ 457.296,\ 367.215,\ 248.375]$ |
| `distortion_model` | `radial-tangential` |
| `distortion_coefficients` $[k_1, k_2, p_1, p_2]$ | $[-0.28340811,\ 0.07395907,\ 0.00019359,\ 1.76187114 \times 10^{-5}]$ |
| `resolution` | $752 \times 480$ |
| `rate_hz` | 20 |

The extrinsic calibration `T_BS` of `cam0` is the project's $T_{bc}$:

$$T_{bc} \approx \begin{bmatrix} 0.0148655 & -0.9998809 & 0.0041403 & -0.0216401 \\ 0.9995572 & 0.0149672 & 0.0257155 & -0.0646770 \\ -0.0257744 & 0.0037562 & 0.9996607 & 0.0098107 \\ 0 & 0 & 0 & 1 \end{bmatrix}.$$

Its third column shows that the optical axis $z_c$ is almost exactly the body $z$-axis, and its first two columns that the camera $x$-axis is close to body $y$ and the camera $y$-axis close to body $-x$. The camera center sits about 7 cm from the IMU. At rest, the EuRoC accelerometer reads close to $+g$ on its $x$-axis, so the body $x$-axis points roughly up. Verify both facts on your data: they are exactly the kind of sanity check that catches a transposed extrinsic.

## Sequences

| Sequence | Environment | Difficulty | Ground truth |
|---|---|---|---|
| MH_01_easy, MH_02_easy | machine hall | easy | laser tracker (position) |
| MH_03_medium | machine hall | medium | laser tracker (position) |
| MH_04_difficult, MH_05_difficult | machine hall | difficult (fast, dark) | laser tracker (position) |
| V1_01_easy, V2_01_easy | Vicon room | easy | motion capture (pose) |
| V1_02_medium, V2_02_medium | Vicon room | medium | motion capture (pose) |
| V1_03_difficult, V2_03_difficult | Vicon room | difficult (fast, blur) | motion capture (pose) |

MH_01_easy is the project's development sequence. The difficult sequences contain fast rotations, motion blur and poorly lit regions; they are where robust front ends and consistent estimators make the difference.

Appendix E

# Solutions to the Project Derivation Exercises

**Pitfall: read this first**

These are the Jacobians that `AGENTS.md` (Guardrail 4) asks you to derive yourself. Attempt each exercise first, check your result numerically, and only then compare. Every result below was verified against central finite differences built on the project's $\boxplus/\boxminus$ operators.

## E.1 Error-state dynamics $F_c$ and $G_c$

**Attitude.** Differentiate $R = \hat{R}\,\mathrm{Exp}(\delta\theta)$ with Lemma 17.1, to first order:

$$\dot{R} = \dot{\hat{R}}\,\mathrm{Exp}(\delta\theta) + \hat{R}\,\mathrm{Exp}(\delta\theta)[\dot{\delta\theta}]_\times = \hat{R}[\hat{\omega}]_\times\,\mathrm{Exp}(\delta\theta) + \hat{R}\,\mathrm{Exp}(\delta\theta)[\dot{\delta\theta}]_\times.$$

The true kinematics give $\dot{R} = R[\omega]_\times = \hat{R}\,\mathrm{Exp}(\delta\theta)[\omega]_\times$. Equate and multiply on the left by $(\hat{R}\,\mathrm{Exp}(\delta\theta))^\mathsf{T}$:

$$[\omega]_\times = \mathrm{Exp}(-\delta\theta)[\hat{\omega}]_\times\,\mathrm{Exp}(\delta\theta) + [\dot{\delta\theta}]_\times = [\mathrm{Exp}(-\delta\theta)\hat{\omega}]_\times + [\dot{\delta\theta}]_\times.$$

With $\mathrm{Exp}(-\delta\theta)\hat{\omega} \approx \hat{\omega} - \delta\theta \times \hat{\omega} = \hat{\omega} + \hat{\omega} \times \delta\theta$ and $\omega - \hat{\omega} = -\delta b_g - n_g$:

$$\dot{\delta\theta} = -[\hat{\omega}]_\times\,\delta\theta - \delta b_g - n_g. \tag{E.1}$$

The term $-[\hat{\omega}]_\times\delta\theta$, absent in the global version (Example 17.2), appears because the error is expressed in body axes that rotate with angular velocity $\hat{\omega}$. An error fixed in the world appears to rotate backwards in the body frame.

**Velocity.** With $R \approx \hat{R}(I + [\delta\theta]_\times)$ and $a_m - b_a - n_a = \hat{a} - \delta b_a - n_a$:

$$\dot{\hat{v}} + \dot{\delta v} \approx \hat{R}\hat{a} + \hat{R}[\delta\theta]_\times\hat{a} - \hat{R}\delta b_a - \hat{R}n_a + g_w,$$

dropping the second-order products $[\delta\theta]_\times\delta b_a$ and $[\delta\theta]_\times n_a$. Subtracting $\dot{\hat{v}} = \hat{R}\hat{a} + g_w$ and using $[\delta\theta]_\times\hat{a} = -[\hat{a}]_\times\delta\theta$:

$$\dot{\delta v} = -\hat{R}[\hat{a}]_\times\,\delta\theta - \hat{R}\,\delta b_a - \hat{R}\,n_a. \tag{E.2}$$

**Assembly.** With the frozen orders $\delta x = [\delta p, \delta v, \delta\theta, \delta b_a, \delta b_g]$ and $w = [n_a, n_g, n_{b_a}, n_{b_g}]$:

$$F_c = \begin{bmatrix} 0 & I & 0 & 0 & 0 \\ 0 & 0 & -\hat{R}[\hat{a}]_\times & -\hat{R} & 0 \\ 0 & 0 & -[\hat{\omega}]_\times & 0 & -I \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \end{bmatrix}, \qquad G_c = \begin{bmatrix} 0 & 0 & 0 & 0 \\ -\hat{R} & 0 & 0 & 0 \\ 0 & -I & 0 & 0 \\ 0 & 0 & I & 0 \\ 0 & 0 & 0 & I \end{bmatrix}, \tag{E.3}$$

all blocks $3 \times 3$, with $\hat{R} = \hat{R}_{wb}$, $\hat{a} = a_m - \hat{b}_a$, $\hat{\omega} = \omega_m - \hat{b}_g$. The structural zeros follow from the cascade: position depends only on velocity; attitude does not depend on position, velocity or the accelerometer bias; the biases are driven only by their own noise. Since $Q_c$ is block-diagonal and $\hat{R}\hat{R}^\mathsf{T} = I$, $Q_d \approx G_c Q_c G_c^\mathsf{T} \Delta t = \mathrm{diag}(0,\ \sigma_a^2 I,\ \sigma_g^2 I,\ \sigma_{b_a}^2 I,\ \sigma_{b_g}^2 I)\,\Delta t$.

**Checking the signs.** Rotating a positive error $\delta\theta$ about $\hat{\omega}$ itself gives $-[\hat{\omega}]_\times \hat{\omega} = 0$: an error about the rotation axis does not move, as it should. A positive gyro bias error makes the true rate smaller than the estimated one, so the true attitude lags and $\dot{\delta\theta} = -\delta b_g$. For a level, static IMU, $\hat{a} = [0, 0, g]$, and $-[\hat{a}]_\times \delta\theta = g\,(\delta\theta_y, -\delta\theta_x, 0)$: a tilt about $y$ produces a velocity error along $x$, the gravity leak.

## E.2 Closed-form blocks of Φ

The project's default is $\Phi \approx I + F_c \Delta t$. If a higher-order transition is adopted (and logged), the exact solution of the error dynamics over a step with constant $\hat{\omega}$, $\hat{a}$, and with $\hat{R}(s) = \hat{R}_k \,\mathrm{Exp}(\hat{\omega} s)$ evolving inside the step, has these blocks, with $\phi = \hat{\omega}\Delta t$ and $N(\phi)$ from Proposition 16.1:

$$\begin{aligned} \Phi_{\theta\theta} &= \mathrm{Exp}(-\phi) = \mathrm{Exp}(\phi)^\mathsf{T}, & \Phi_{\theta b_g} &= -\Delta t\, J_r(\phi), \\ \Phi_{v\theta} &= -\hat{R}_k [\Delta t\, J_l(\phi)\hat{a}]_\times, & \Phi_{v b_a} &= -\hat{R}_k\, \Delta t\, J_l(\phi), \\ \Phi_{p\theta} &= -\hat{R}_k [\Delta t^2 N(\phi)\hat{a}]_\times, & \Phi_{p b_a} &= -\hat{R}_k\, \Delta t^2 N(\phi), \qquad \Phi_{pv} = \Delta t\, I. \end{aligned}$$

The remaining coupling blocks ($\Phi_{v b_g}$, $\Phi_{p b_g}$) have no compact closed form; compute them by series or numerically, and use Van Loan's method (Proposition 11.3) or a fine numerical integration of $\dot{\Phi} = F_c(s)\Phi$ as the test oracle. To first order in $\Delta t$, every block reduces to the corresponding block of $I + F_c \Delta t$.

## E.3 Pose measurement Jacobian

With $h(x) = (p_{wb}, q_{wb})$ and $r(\delta x) = h(\hat{x} \boxplus \delta x) \boxminus h(\hat{x})$:

$$r_p = (\hat{p} + \delta p) - \hat{p} = \delta p, \qquad r_\theta = \mathrm{Log}_q\left(\hat{q}^{-1} \otimes \hat{q} \otimes \mathrm{Exp}_q(\delta\theta)\right) = \delta\theta.$$

Both are exact, so

$$H = \begin{bmatrix} I_3 & 0 & 0 & 0 & 0 \\ 0 & 0 & I_3 & 0 & 0 \end{bmatrix} \in \mathbb{R}^{6\times 15}. \tag{E.4}$$

Its nullspace is spanned by $\delta v$, $\delta b_a$ and $\delta b_g$: these are not measured directly and are corrected through their cross-covariances with $\delta p$ and $\delta\theta$. The simplicity of the attitude block is a consequence of the noise model $q_{meas} = q \otimes \mathrm{Exp}_q(n_\theta)$ matching the local perturbation, which makes $r_\theta = \mathrm{Log}(\mathrm{Exp}(\delta\theta)\,\mathrm{Exp}(n_\theta)) \approx \delta\theta + n_\theta$. If the residual is instead linearized around a non-zero value $r_0$ (an iterated update, or the optimization view of Section 14.4), the derivative of $\mathrm{Log}(\mathrm{Exp}(-\delta\theta)\,\mathrm{Exp}(r_0))$ with respect to $\delta\theta$ is $-J_l^{-1}(r_0)$, which reduces to $-I$ for small $r_0$, the sign being that of the optimization convention.

## E.4 Cloning Jacobian

At cloning time the true clone equals the true IMU pose and the clone's nominal equals the IMU nominal, so

$$\delta p_c = p - \hat{p} = \delta p, \qquad \mathrm{Exp}(\delta\theta_c) = \hat{q}^{-1} \otimes q = \mathrm{Exp}(\delta\theta) \;\Rightarrow\; \delta\theta_c = \delta\theta,$$

exactly, without linearization. With the new clone appended at the end of an $n = 15 + 6N$ dimensional state,

$$J_g = \begin{bmatrix} I_3 & 0 & 0 & 0 & 0 & 0_{3\times 6N} \\ 0 & 0 & I_3 & 0 & 0 & 0_{3\times 6N} \end{bmatrix} \in \mathbb{R}^{6\times n}, \qquad J = \begin{bmatrix} I_n \\ J_g \end{bmatrix}. \tag{E.5}$$

Consequently $JPJ^\mathsf{T}$ copies blocks: the new clone's covariance is $\begin{bmatrix} P_{pp} & P_{p\theta} \\ P_{\theta p} & P_{\theta\theta} \end{bmatrix}$, and its cross-covariance with every other state is the stacked $p$ and $\theta$ rows of $P$. No matrix product is needed in the implementation.

If the clone stored the camera pose, $R_{wc} = R_{wb}R_{bc}$ and $p_{wc} = p_{wb} + R_{wb}p_{bc}$ would give $\delta\theta_c = R_{bc}^\mathsf{T}\delta\theta$ and $\delta p_c = \delta p - \hat{R}[p_{bc}]_\times\delta\theta$, by the composition and rotation-action rows of Table 8.1. Storing the IMU pose keeps $J$ trivial and moves the extrinsics into the measurement model.

## E.5 Visual measurement Jacobians

Write $\hat{d}_i = \hat{R}_{wb_i}^\mathsf{T}(\hat{p}_f - \hat{p}_{wb_i})$, the feature in the clone's body frame. Perturbing the clone and the feature,

$$R_{wb_i}^\mathsf{T}(p_f - p_{wb_i}) \approx (I - [\delta\theta_i]_\times)\hat{R}_{wb_i}^\mathsf{T}(\hat{p}_f + \delta p_f - \hat{p}_{wb_i} - \delta p_i) \approx \hat{d}_i + [\hat{d}_i]_\times\delta\theta_i - \hat{R}_{wb_i}^\mathsf{T}\delta p_i + \hat{R}_{wb_i}^\mathsf{T}\delta p_f,$$

using the inverse-action row of Table 8.1. Applying $R_{bc}^\mathsf{T}$ (the subtraction of $p_{bc}$ is constant):

$$\frac{\partial p_{c_i}}{\partial\delta\theta_i} = R_{bc}^\mathsf{T}[\hat{d}_i]_\times, \qquad \frac{\partial p_{c_i}}{\partial\delta p_i} = -R_{bc}^\mathsf{T}\hat{R}_{wb_i}^\mathsf{T}, \qquad \frac{\partial p_{c_i}}{\partial p_f} = R_{bc}^\mathsf{T}\hat{R}_{wb_i}^\mathsf{T}. \tag{E.6}$$

Moving the clone by $\delta$ is equivalent to moving the feature by $-\delta$, hence the opposite signs. With $J_\pi = \frac{1}{\hat{Z}}\begin{bmatrix} I_2 & -\pi(\hat{p}_{c_i}) \end{bmatrix}$ from Proposition 20.2:

$$H_{x,ji} = \Big[\, 0_{2\times 15} \;\cdots\; \underbrace{-J_\pi R_{bc}^\top \hat{R}_{wb_i}^\top}_{\delta p_i} \;\; \underbrace{J_\pi R_{bc}^\top [\hat{d}_i]_\times}_{\delta\theta_i} \;\cdots\; \Big], \qquad H_{f,ji} = J_\pi R_{bc}^\top \hat{R}_{wb_i}^\top, \tag{E.7}$$

with the two non-zero blocks in clone $i$'s columns $15+6i \ldots 20+6i$, and zeros in the IMU columns and in every other clone's columns. The stacked $H_{x,j}$ therefore has one $2\times 6$ non-zero block per observation (Figure 26.1).

**Checking the signs.** Translate the clone along the camera's optical axis toward the feature: the feature gets closer, so its image moves away from the principal point, and $-J_\pi R_{bc}^\top \hat{R}_{wb_i}^\top \delta p_i$ predicts exactly that. Rotate the clone about the camera's $y$-axis by a small positive angle ($\delta\theta_i = \alpha R_{bc} e_y$): the image of a distant point on the optical axis moves in $-x$, which the $\delta\theta_i$ block reproduces (for a near point, the lever arm $p_{bc}$ adds a small translation of the camera center).

# Further Reading

**Estimation theory.** Bar-Shalom, Li and Kirubarajan [3] is the standard reference for Kalman filtering, consistency testing (NEES, NIS) and tracking practice. Maybeck [39] remains the clearest treatment of continuous-time stochastic models and their discretization, and Simon [46] is a modern, readable textbook.

**Rotations and Lie theory.** Solà's quaternion notes [47] derive the error-state filter with exactly the conventions of this project and are the best single companion to Chapters 14 and 17. The micro Lie theory paper [48] is a short, practical introduction to manifolds, Jacobians and $\boxplus/\boxminus$. Barfoot [4] develops estimation on matrix Lie groups in depth. Sommer et al. [49] explain the Hamilton/JPL confusion once and for all.

**Inertial navigation.** Groves [20] covers inertial sensors, error models and strapdown algorithms comprehensively. El-Sheimy et al. [14] is a good introduction to the Allan variance.

**Computer vision.** Hartley and Zisserman [23] is the reference for multi-view geometry; Ma et al. [38] gives a more geometric, calibrated-camera treatment closer to how VIO uses vision. Baker and Matthews [2] unify the many variants of Lucas–Kanade.

**Visual-inertial odometry.** Read the original MSCKF paper [40] first, then MSCKF 2.0 [34] for consistency and calibration. Huang's review [29] and Scaramuzza and Zhang [44] survey the field. The OpenVINS documentation and paper [18] and the MSCKF-VIO code [51] are excellent engineering references. For the optimization-based alternative, start with preintegration [16], VINS-Mono [42] and the factor-graph tutorial of Dellaert and Kaess [12].

**Numerical linear algebra.** Golub and Van Loan [19] for factorizations, Higham [26] for floating-point error analysis.

# References


[1] T. Bailey, J. Nieto, J. Guivant, M. Stevens, and E. Nebot. Consistency of the EKF-SLAM algorithm. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2006.

[2] S. Baker and I. Matthews. Lucas–Kanade 20 years on: A unifying framework. *International Journal of Computer Vision*, 56(3):221–255, 2004.

[3] Y. Bar-Shalom, X. R. Li, and T. Kirubarajan. *Estimation with Applications to Tracking and Navigation*. Wiley, 2001.

[4] T. D. Barfoot. *State Estimation for Robotics*. Cambridge University Press, 2017 (2nd ed. 2024).

[5] A. Barrau and S. Bonnabel. The invariant extended Kalman filter as a stable observer. *IEEE Transactions on Automatic Control*, 62(4):1797–1812, 2017.

[6] M. Bloesch, S. Omari, M. Hutter, and R. Siegwart. Robust visual inertial odometry using a direct EKF-based approach. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2015.

[7] J.-Y. Bouguet. Pyramidal implementation of the affine Lucas Kanade feature tracker: description of the algorithm. Technical report, Intel Corporation, Microprocessor Research Labs, 2001.

[8] M. Burri, J. Nikolic, P. Gohl, T. Schneider, J. Rehder, S. Omari, M. W. Achtelik, and R. Siegwart. The EuRoC micro aerial vehicle datasets. *The International Journal of Robotics Research*, 35(10):1157–1163, 2016.

[9] C. Campos, R. Elvira, J. J. Gómez Rodríguez, J. M. M. Montiel, and J. D. Tardós. ORB-SLAM3: An accurate open-source library for visual, visual-inertial, and multimap SLAM. *IEEE Transactions on Robotics*, 37(6):1874–1890, 2021.

[10] J. Civera, A. J. Davison, and J. M. M. Montiel. Inverse depth parametrization for monocular SLAM. *IEEE Transactions on Robotics*, 24(5):932–945, 2008.

[11] A. J. Davison, I. D. Reid, N. D. Molton, and O. Stasse. MonoSLAM: Real-time single camera SLAM. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 29(6):1052–1067, 2007.

[12] F. Dellaert and M. Kaess. Factor graphs for robot perception. *Foundations and Trends in Robotics*, 6(1–2):1–139, 2017.

[13] J. Delmerico and D. Scaramuzza. A benchmark comparison of monocular visual-inertial odometry algorithms for flying robots. In *IEEE International Conference on Robotics and Automation (ICRA)*, 2018.

[14] N. El-Sheimy, H. Hou, and X. Niu. Analysis and modeling of inertial sensors using Allan variance. *IEEE Transactions on Instrumentation and Measurement*, 57(1):140–149, 2008.

[15] M. A. Fischler and R. C. Bolles. Random sample consensus: A paradigm for model fitting with applications to image analysis and automated cartography. *Communications of the ACM*, 24(6):381–395, 1981.

[16] C. Forster, L. Carlone, F. Dellaert, and D. Scaramuzza. On-manifold preintegration for real-time visual-inertial odometry. *IEEE Transactions on Robotics*, 33(1):1–21, 2017.

[17] P. Furgale, J. Rehder, and R. Siegwart. Unified temporal and spatial calibration for multi-sensor systems. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2013.

[18] P. Geneva, K. Eckenhoff, W. Lee, Y. Yang, and G. Huang. OpenVINS: A research platform for visual-inertial estimation. In *IEEE International Conference on Robotics and Automation (ICRA)*, 2020.

[19] G. H. Golub and C. F. Van Loan. *Matrix Computations*. Johns Hopkins University Press, 4th edition, 2013.

[20] P. D. Groves. *Principles of GNSS, Inertial, and Multisensor Integrated Navigation Systems*. Artech House, 2nd edition, 2013.

[21] M. Grupp. evo: Python package for the evaluation of odometry and SLAM. https://github.com/MichaelGrupp/evo, 2017.

[22] C. Harris and M. Stephens. A combined corner and edge detector. In *Proceedings of the Alvey Vision Conference*, 1988.

[23] R. Hartley and A. Zisserman. *Multiple View Geometry in Computer Vision*. Cambridge University Press, 2nd edition, 2004.

[24] R. Hermann and A. J. Krener. Nonlinear controllability and observability. *IEEE Transactions on Automatic Control*, 22(5):728–740, 1977.

[25] J. A. Hesch, D. G. Kottas, S. L. Bowman, and S. I. Roumeliotis. Consistency analysis and improvement of vision-aided inertial navigation. *IEEE Transactions on Robotics*, 30(1):158–176, 2014.

[26] N. J. Higham. *Accuracy and Stability of Numerical Algorithms*. SIAM, 2nd edition, 2002.

[27] G. P. Huang, A. I. Mourikis, and S. I. Roumeliotis. A first-estimates Jacobian EKF for improving SLAM consistency. In *Experimental Robotics (ISER 2008)*, Springer Tracts in Advanced Robotics, vol. 54, 2009.

[28] G. P. Huang, A. I. Mourikis, and S. I. Roumeliotis. Observability-based rules for designing consistent EKF SLAM estimators. *The International Journal of Robotics Research*, 29(5):502–528, 2010.

[29] G. Huang. Visual-inertial navigation: A concise review. In *IEEE International Conference on Robotics and Automation (ICRA)*, 2019.

[30] IEEE Std 952-1997. *IEEE Standard Specification Format Guide and Test Procedure for Single-Axis Interferometric Fiber Optic Gyros* (includes the Allan variance method). IEEE, 1997.

[31] S. J. Julier and J. K. Uhlmann. A counter example to the theory of simultaneous localization and map building. In *IEEE International Conference on Robotics and Automation (ICRA)*, 2001.

[32] R. E. Kalman. A new approach to linear filtering and prediction problems. *Transactions of the ASME, Journal of Basic Engineering*, 82(1):35–45, 1960.

[33] S. Leutenegger, S. Lynen, M. Bosse, R. Siegwart, and P. Furgale. Keyframe-based visual-inertial odometry using nonlinear optimization. *The International Journal of Robotics Research*, 34(3):314–334, 2015.

[34] M. Li and A. I. Mourikis. High-precision, consistent EKF-based visual-inertial odometry. *The International Journal of Robotics Research*, 32(6):690–711, 2013.

[35] M. Li and A. I. Mourikis. Online temporal calibration for camera-IMU systems: Theory and algorithms. *The International Journal of Robotics Research*, 33(7):947–964, 2014.

[36] B. D. Lucas and T. Kanade. An iterative image registration technique with an application to stereo vision. In *International Joint Conference on Artificial Intelligence (IJCAI)*, 1981.

[37] T. Lupton and S. Sukkarieh. Visual-inertial-aided navigation for high-dynamic motion in built environments without initial conditions. *IEEE Transactions on Robotics*, 28(1):61–76, 2012.

[38] Y. Ma, S. Soatto, J. Košecká, and S. S. Sastry. *An Invitation to 3-D Vision*. Springer, 2004.

[39] P. S. Maybeck. *Stochastic Models, Estimation, and Control*, volume 1. Academic Press, 1979.

[40] A. I. Mourikis and S. I. Roumeliotis. A multi-state constraint Kalman filter for vision-aided inertial navigation. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 3565–3572, 2007.

[41] D. Nistér. An efficient solution to the five-point relative pose problem. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 26(6):756–770, 2004.

[42] T. Qin, P. Li, and S. Shen. VINS-Mono: A robust and versatile monocular visual-inertial state estimator. *IEEE Transactions on Robotics*, 34(4):1004–1020, 2018.

[43] S. I. Roumeliotis and J. W. Burdick. Stochastic cloning: A generalized framework for processing relative state measurements. In *IEEE International Conference on Robotics and Automation (ICRA)*, 2002.

[44] D. Scaramuzza and Z. Zhang. Visual-inertial odometry of aerial robots. In *Encyclopedia of Robotics*. Springer, 2019. arXiv:1906.03289.

[45] J. Shi and C. Tomasi. Good features to track. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 1994.

[46] D. Simon. *Optimal State Estimation: Kalman, $H_\infty$, and Nonlinear Approaches*. Wiley, 2006.

[47] J. Solà. Quaternion kinematics for the error-state Kalman filter. arXiv:1711.02508, 2017.

[48] J. Solà, J. Deray, and D. Atchuthan. A micro Lie theory for state estimation in robotics. arXiv:1812.01537, 2018.

[49] H. Sommer, I. Gilitschenski, M. Bloesch, S. Weiss, R. Siegwart, and J. Nieto. Why and how to avoid the flipped quaternion multiplication. *Aerospace*, 5(3):72, 2018.

[50] J. Sturm, N. Engelhard, F. Endres, W. Burgard, and D. Cremers. A benchmark for the evaluation of RGB-D SLAM systems. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2012.

[51] K. Sun, K. Mohta, B. Pfrommer, M. Watterson, S. Liu, Y. Mulgaonkar, C. J. Taylor, and V. Kumar. Robust stereo visual inertial odometry for fast autonomous flight. *IEEE Robotics and Automation Letters*, 3(2):965–972, 2018.

[52] N. Trawny and S. I. Roumeliotis. Indirect Kalman filter for 3D attitude estimation. Technical Report 2005-002, University of Minnesota, 2005.

[53] S. Umeyama. Least-squares estimation of transformation parameters between two point patterns. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 13(4):376–380, 1991.

[54] C. F. Van Loan. Computing integrals involving the matrix exponential. *IEEE Transactions on Automatic Control*, 23(3):395–404, 1978.

[55] Y. Yang, P. Geneva, K. Eckenhoff, and G. Huang. Degenerate motion analysis for aided INS with online spatial and temporal sensor calibration. *IEEE Robotics and Automation Letters*, 4(2):2070–2077, 2019.

[56] Z. Zhang and D. Scaramuzza. A tutorial on quantitative trajectory evaluation for visual(-inertial) odometry. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2018.

# Index


accelerometer, 177
AddressSanitizer, 330
adjacency rule, 87
aliasing, 78
Allan variance, 81
aperture problem, 243
attitude estimation, 170
axis-angle, 88

back substitution, 32
basis, 14
Bayes' rule, 61
bearing, 224, 289
best linear unbiased estimator, 124
bias, 122
bilinear interpolation, 236
Bortz equation, 189
bundle adjustment, 259

Cauchy–Schwarz inequality, 14
central limit theorem, 68
centripetal acceleration, 96
chain rule, 48
characteristic polynomial, 23
chi-squared distribution, 68
Cholesky factorization, 32
CMake, 331
condition number, 38
conditioning, 66
convolution, 234
coordinates, 12
Coriolis acceleration, 96
correlation coefficient, 63
covariance, 63
covariance matrix, 63
Cramér–Rao bound, 125
cross product, 16
cross-product matrix, 16

degenerate motions, 320
determinant, 21
dimension, 14
dot product, 14
double cover, 92

Eckart–Young theorem, 37
Eigen, 327
eigenvalue, 23
eigenvector, 23
EKF-SLAM, 266
    inconsistency, 314
epipolar constraint, 252
epipolar line, 253
epipole, 253
error state, 166
error-state Kalman filter, 166
essential matrix, 252
estimator, 122
Euler angles, 89
Euler's method, 51, 52
Euler's rotation theorem, 24
event, 60
expectation, 62
expression templates, 327
extended Kalman filter, 159
extended pose group, 319

FEJ, *see* First-Estimates Jacobians
First-Estimates Jacobians, 316
Fisher information, 125
Fisher information matrix, 125
floating point, 41
flops, 31
Fourier transform, 77
frame, 86
fundamental matrix, 253
fundamental subspaces, 20

Gauss–Markov theorem, 124
Gauss–Newton, 132
Gaussian distribution, 62
    multivariate, 64
Gaussian elimination, 19
Gaussian filter, 234
Gaussian pyramid, 235
gimbal lock, 90
Givens rotation, 35
gradient, 47
Gram–Schmidt, 15
group, 104
gyroscope, 179

Harris detector, 242
heap, 325

Hessian, 48
homogeneous coordinates, 225
homogeneous least squares, 37
homography, 226
Householder reflection, 33
hypothesis test, 70

identity matrix, 18
image gradient, 234
image pyramid, 235
inconsistency
    EKF, 314
independent, 61
indistinguishable, 311
information, 123
information matrix, 65
innovation, 150
intrinsic matrix, 224
invariant EKF, 319
invertible, 20
iterated EKF, 137, 160

Jacobian, 47
Joseph form, 152

Kalman filter
    update, 150
Kalman gain, 150

law of large numbers, 67
least-squares, 35
left-nullspace projection, 280
Levenberg–Marquardt, 133
Lie bracket, 105
Lie derivative, 312
Lie group, 104
likelihood, 124
linear, 18
linear combination, 13
linear filtering, 234
linear MMSE estimator, 126
linearly independent, 13
LU factorization, 32
Lucas–Kanade tracker, 243
Lyapunov equation, 80

M-estimator, 135
machine epsilon, 41
Mahalanobis distance, 64
manifold, 103
marginalization, 66
matrix, 17
matrix exponential, 39
matrix product, 18
maximum a posteriori, 125
maximum-likelihood, 124
mean-square error, 122
measurement compression, 282
minimum mean-square error, 125
Monte Carlo, 68
MSCKF, 267
    planar, 287
    visual update, 280
multi-state constraint, 267

noise density, 78
nominal state, 166
non-maximum suppression, 237
norm, 14
normal equations, 35
normalized image coordinates, 224
normalized innovation squared, 152
nullspace, 20
Nyquist frequency, 78

observability, 143
    local weak, 311
observability matrix, 144
observability-constrained EKF, 318
observable, 143
ordinary differential equation, 50
orthogonal, 14, 22
orthogonality principle, 126
orthonormal, 15
outer product, 19
outliers, 134

parallax, 292
particle filter, 162
Picard–Lindelöf theorem, 50
pinhole model, 223
planar MSCKF, 287
planar skew matrix, 288
positive definite, 25
positive semi-definite, 25
power spectral density, 77
probability, 60
probability density function, 61
projector, 35
pseudo-inverse, 37

QR factorization, 33
quadratic form, 25
quaternion, 90

radial-tangential, 226
RAII, 326
random sequence, 75

random variable, 61
random walk, 76
range, 20
rank, 20
rank–nullity theorem, 20
Rayleigh quotient, 26
recursive least squares, 127
reset Jacobian, 169
right-hand rule, 16
robocentric filter, 320
robust kernel, 135
Rodrigues' formula, 88
rotation averaging, 114
rotation vector, 88
rotations, 23

sample mean, 67
sample space, 60
sample variance, 69
sampling theorem, 78
sanitizers, 330
Schur complement, 38
Shi–Tomasi detector, 242
singular value decomposition, 36
singular values, 36
span, 13
special orthogonal group, 88
specific force, 178
spectral theorem, 24
spherical linear interpolation, 94
stack, 325
standard deviation, 62
state transition matrix, 51
state-space model, 141
strapdown mechanization, 186
structure tensor, 242
subspace, 13

tangent space, 104
tangent vector, 104
Taylor's theorem, 48
trace, 23
transport theorem, 96
transpose, 19
triangulation
    planar, 292

Umeyama alignment, 217
UndefinedBehaviorSanitizer, 330
unobservable directions
    planar, 297
    VIO, 313
unobservable subspace, 144, 312
unscented transform, 161

Van Loan's method, 143
variance, 62
vector, 12
vector space, 13

weighted least-squares, 123
white noise, 78
white sequence, 76
wide-sense stationary, 75
Wiener process, 79
Woodbury identity, 39

zero-velocity update, 209